


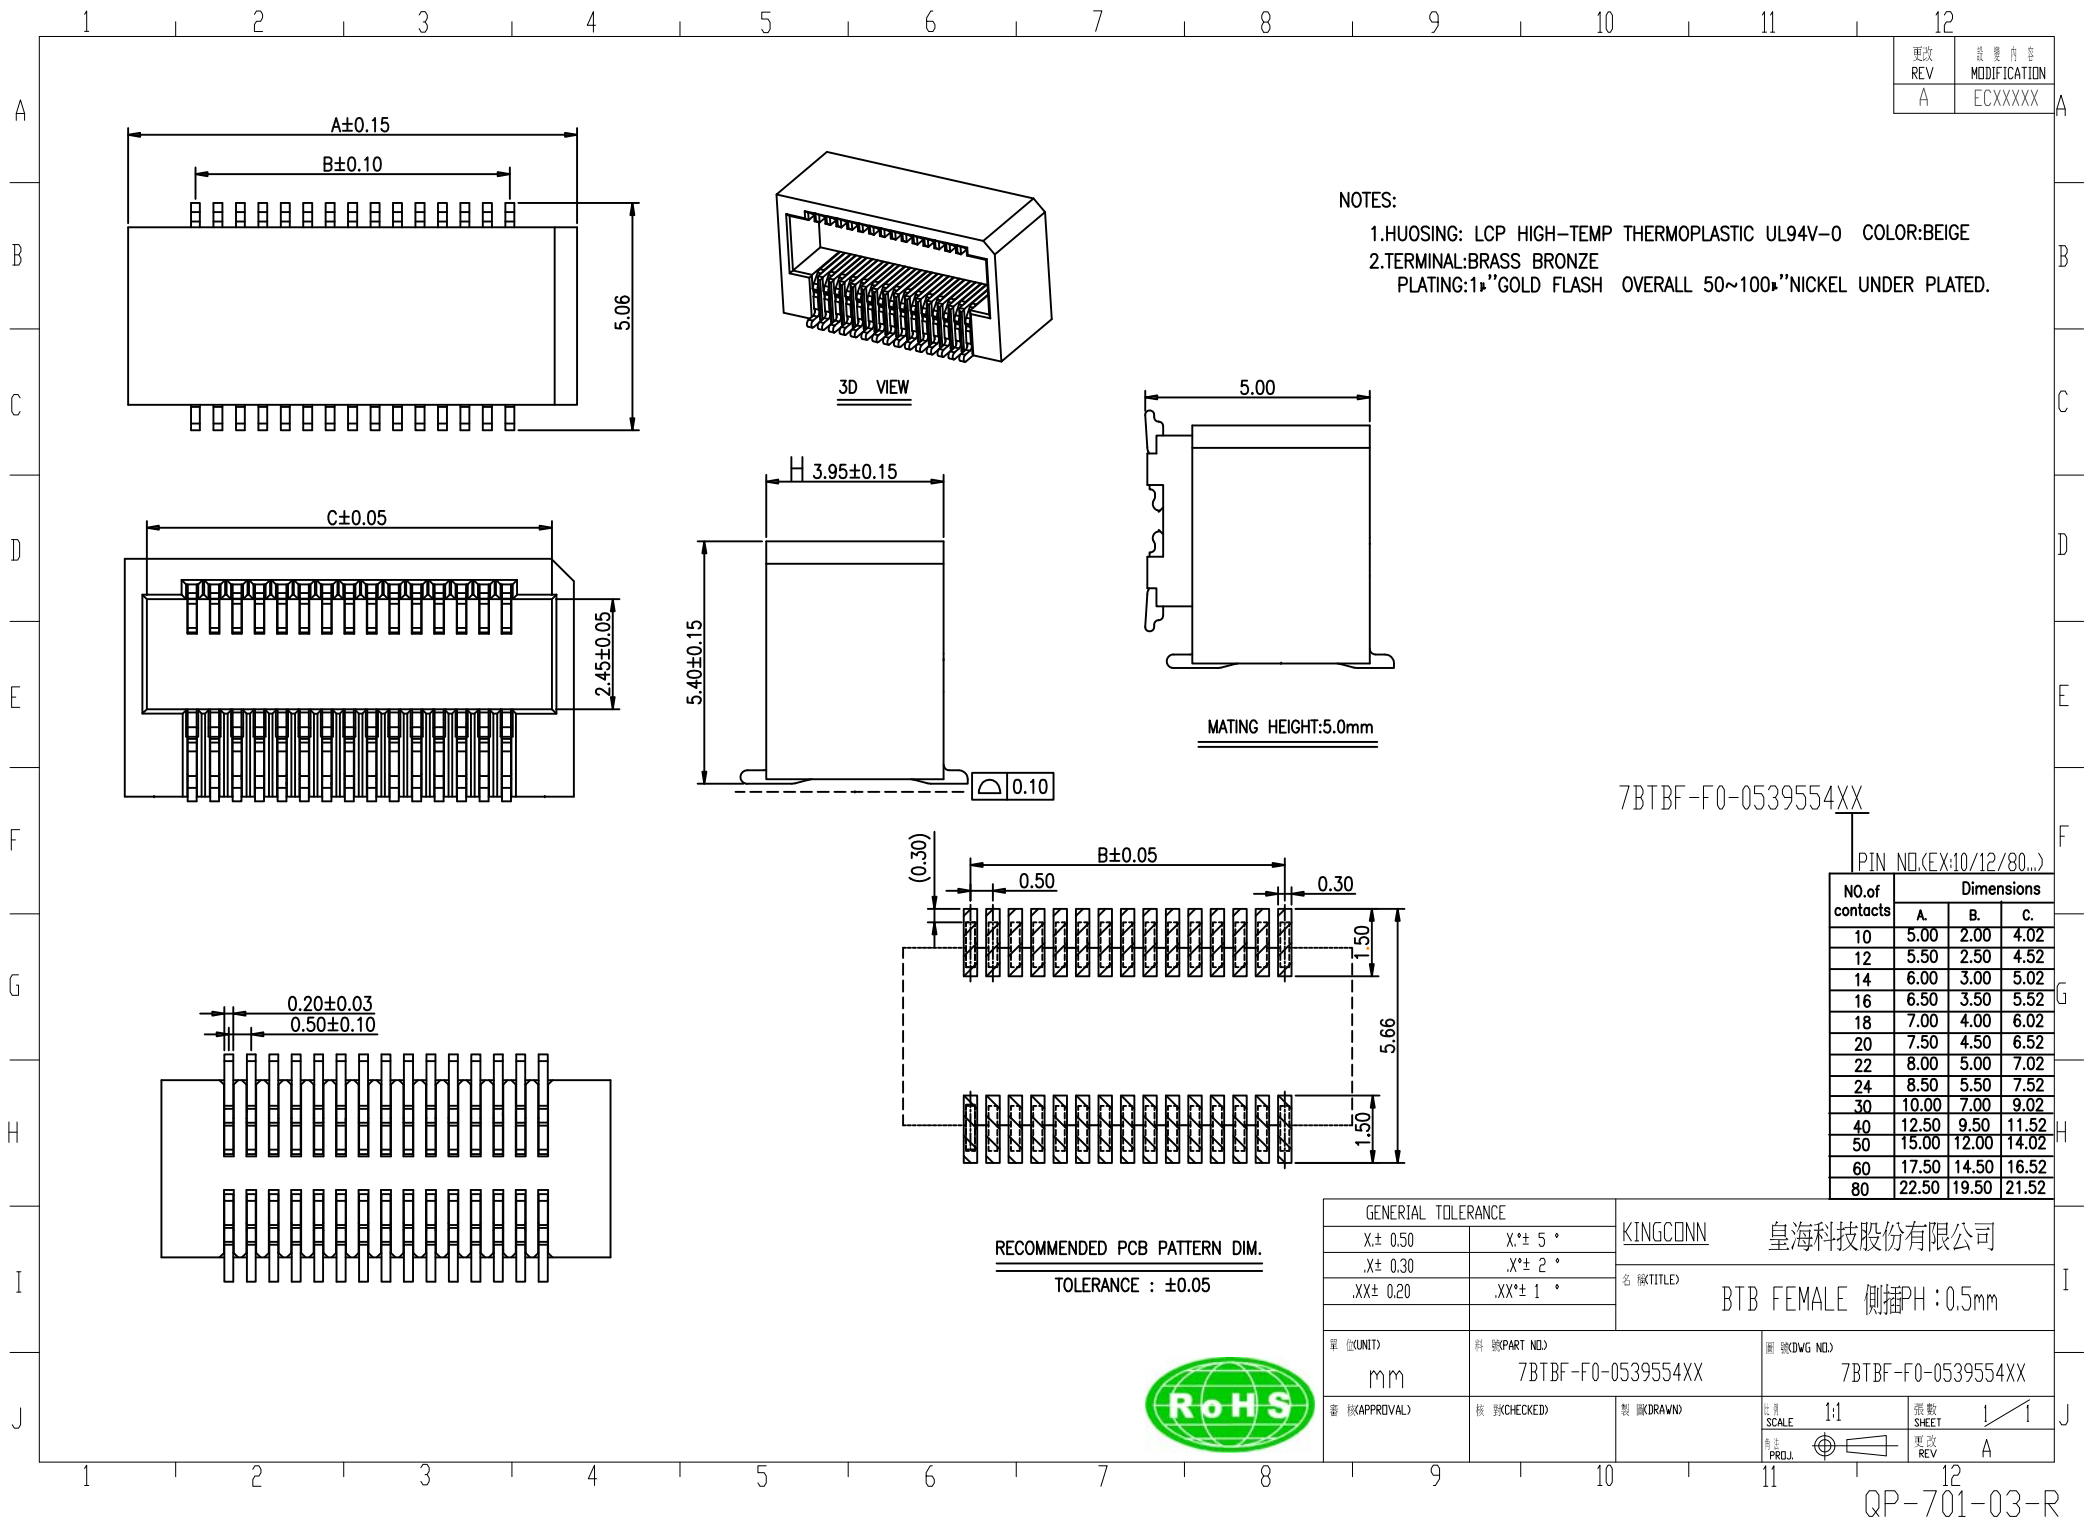

更改 REV	设计内容 MODIFICATION
A	ECXXXXX

NOTES:
1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
2.TERMINAL:BRASS BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

7BTBF-F0-0539554XX

NO.of contacts	Dimensions		
	A.	B.	C.
10	5.00	2.00	4.02
12	5.50	2.50	4.52
14	6.00	3.00	5.02
16	6.50	3.50	5.52
18	7.00	4.00	6.02
20	7.50	4.50	6.52
22	8.00	5.00	7.02
24	8.50	5.50	7.52
30	10.00	7.00	9.02
40	12.50	9.50	11.52
50	15.00	12.00	14.02
60	17.50	14.50	16.52
80	22.50	19.50	21.52

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 (TITLE) BTB FEMALE 侧插 PH:0.5mm	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 (UNIT) mm	料 (PART NO.) 7BTBF-F0-0539554XX	图 (DWG NO.) 7BTBF-F0-0539554XX	
审 (APPROVAL)	核 (CHECKED)	製 (DRAWN)	比例 SCALE 1:1 张数 SHEET 1/1 更改 REV A

