



更改 REV	数量 MODIFICATION
A	ECXXXX

- SPECIFICATIONS
- 1.CURRENT RATING: 1.0A .
 - 2.VOLTAGE RATING 300VAC.
 - 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
 - 4.OPERATING HUMIDITY RANGE:90% TO 95%.
 - 5.WITHSTANDING VOLTAGE:500 VAC



7BTBF-F0-18XXXXX

- 50>H:5.0
- 70>H:7.0
- 90>H:9.0


PIN NO:EX:10PIN-010 ; 20PIN-020...

POSITION	A	B	C	D
10	10.00	8.32	3.20	6.80
20	14.00	12.32	7.20	10.80
22	14.80	13.12	8.00	11.60
24	15.60	13.92	8.80	12.40
26	16.40	14.72	9.60	13.20
30	18.00	16.32	11.20	14.80
40	22.00	20.32	15.20	18.80
50	26.00	24.32	19.20	22.80
60	30.00	28.32	23.20	26.80
80	38.00	36.32	31.20	34.80
100	46.00	44.32	39.20	42.80
120	54.00	52.32	47.20	50.80
140	62.00	60.32	55.20	58.80
150	66.00	64.32	59.20	62.80
200	86.00	84.32	79.20	82.00

HEIGHT	H
5.00	5.10
7.00	7.00
9.00	9.00

ERF8 LEAD STYLE	MATED HEIGHT			
	ERM8 LEAD STYLE			
	2.00	5.00	8.00	9.00
5.00	7.00	10.00	13.00	14.00
7.00	9.00	12.00	15.00	16.00
9.00	11.00	14.00	17.00	18.00

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) 0.8 PITCH BTB SOCKET	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7BTBF-F0-18XXXXX	7BTBF-F0-18XXXXX	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1
			圖 號 SHEET 1 / 1
			更改 REV A

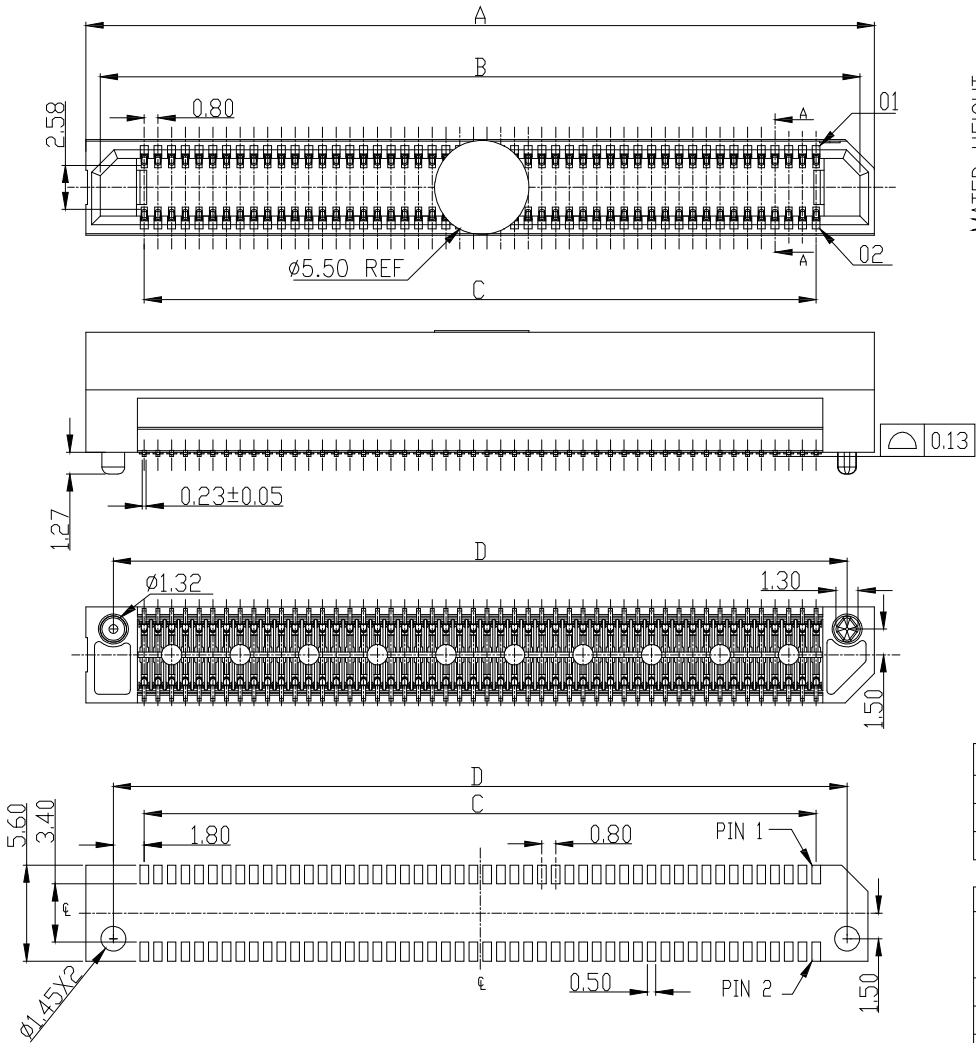

Recommended PC board pattern
(TOP VIEW)