

更改 REV	变更内容 MODIFICATION
A	ECXXXX

SPECIFICATIONS
1.CURRENT RATING: 1.0A
2.VOLTAGE RATING 240VAC
3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
4.OPERATING HUMIDITY RANGE:90% TO 95%.
5.WITHSTANDING VOLTAGE:700V AC/MINUTE.

7BTBF-F0-XX2127BXX-XX

TABLE 2:ROWS
(04/05.../14)

TABLE 1:HEIGHT
(50/60/65/75)

TABLE 3:POSITION
(10/15/.../50)

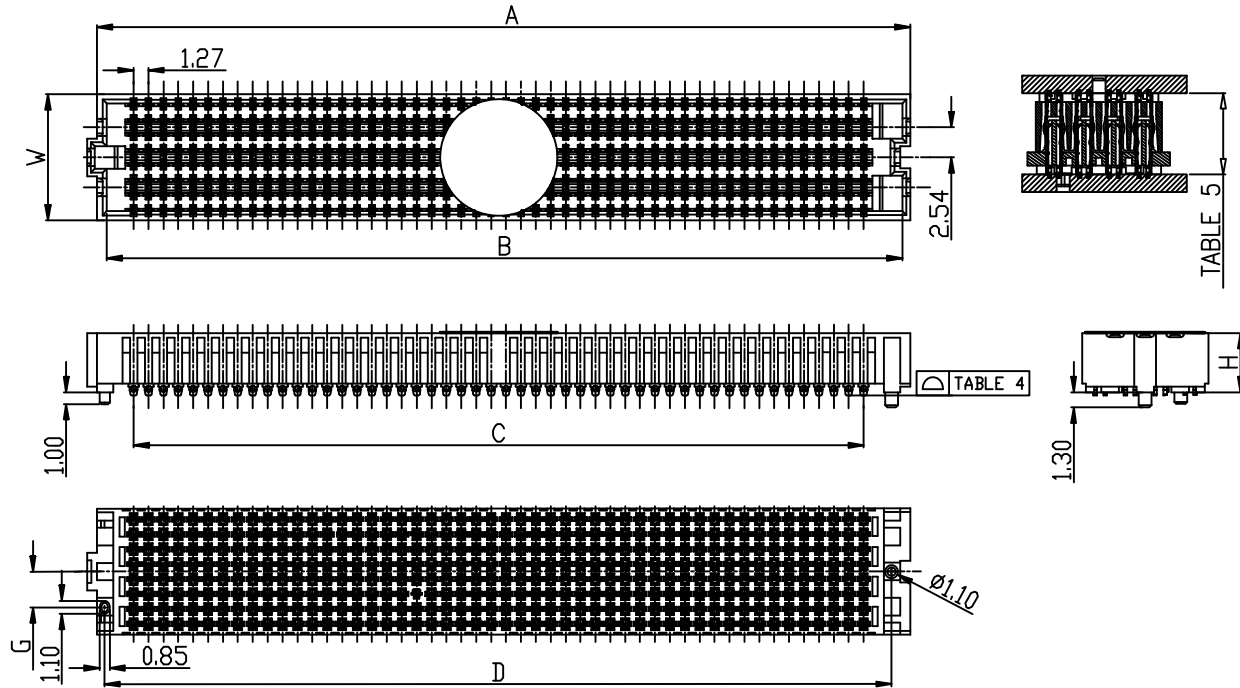



TABLE 1	
HEIGHT	H
5.0	5.05
6.0	6.05
6.5	6.55
7.5	7.54

TABLE 2		
ROWS	W	G
04	5.66	2.01
05 06	8.20	3.05
08	10.74	3.05
10	13.28	3.05
12	15.82	3.05
14	18.36	3.05

TABLE 3				
POSITION	A	B	C	D
10	18.52	17.02	11.43	16.28
15	24.87	23.37	17.78	22.63
19	29.95	28.45	22.86	27.71
20	31.22	29.72	24.13	28.98
25	37.57	36.07	30.13	35.33
30	43.92	42.42	36.83	41.68
40	56.62	55.12	49.53	54.38
50	69.32	67.82	62.23	67.08

TABLE 4	
POSITION	COPLANARITY
10 PIN	0.15
30 PIN	0.20
40 PIN	0.23
50 PIN	0.23

TABLE 5 STACK HEIGHT				
	5.05	6.05	6.55	7.54
4.72	7.00	8.00	8.50	9.50
5.72	8.00	9.00	9.50	10.50
6.22	8.50	9.50	10.00	11.00
8.23	NA	NA	12.00	NA
9.27	11.50	12.50	13.00	14.00
9.70	12.00	13.00	13.50	14.50
11.71	14.00	15.00	15.50	16.50
13.72	16.00	17.00	17.50	18.50

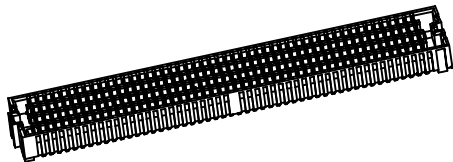

GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司		
X± 0.50	X*± 5 °				
.X± 0.30	.X*± 2 °				
.XX± 0.20	.XX*± 1 °				
		名 称(TITLE)			
		PH:1.27mm Socket			
單 位(UNIT)		料 號(PART NO.)		圖 號(DWG NO.)	
mm		7BTBF-F0-XX2127BXX-XX		7BTBF-F0-XX2127BXX-XX	
審 核(APPROVAL)		核 對(CHECKED)		製 圖(DRAWN)	

