

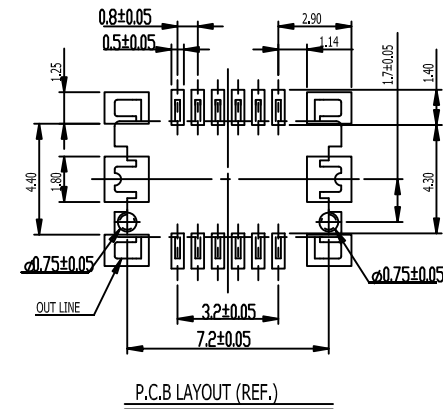




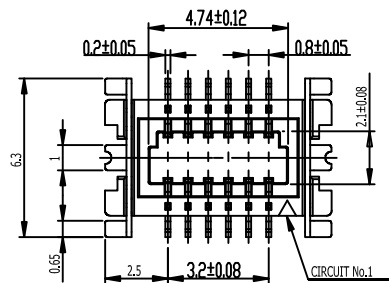

* COPLANARITY OF SMT TERMINAL IS 0.1mm MAX.

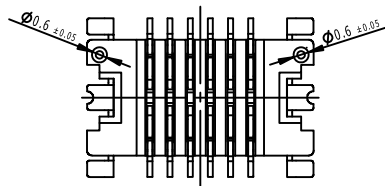

Notes:

MATERIAL:

INSULATOR: THERMOPLASTIC HIGH-TEMP NATURE UL 94V-0.


CONTACT: COPPER ALLOY

HOLD DOWN: COPPER ALLOY

Plating Type:

CONTACT: Tin over Nickel(RoHS Compliant)

HOLD DOWN: Tin over Nickel(RoHS Compliant)



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	XX*± 5 °	名 (TITLE) B to B Connectors PITCH0.8 10PIN female	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT) mm	料號(PART NO.) 7BTBF-F4-0810	圖號(DWG NO.) 7BTBF-F4-0810	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 圖數 SHEET 1/1 更改 REV A

