

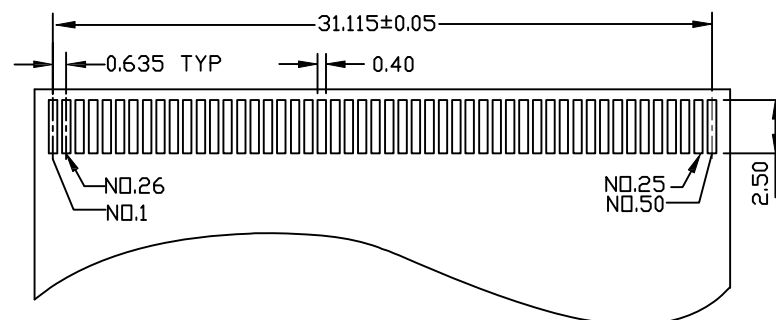
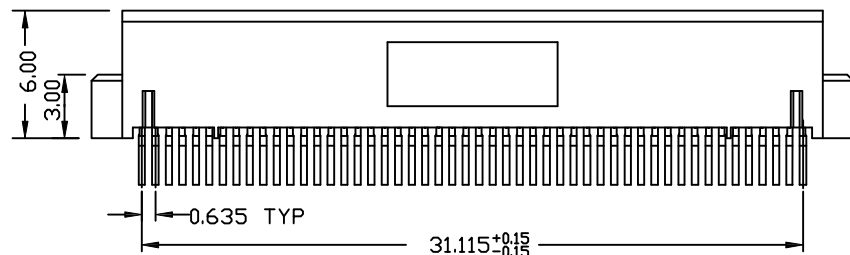


更改 REV	数量 MODIFICATION
A	EC05613
B	EC11623

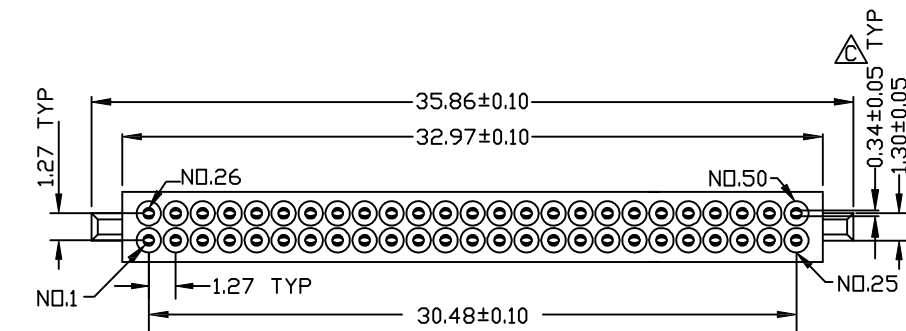

RECOMMENDED P.C.B LAYOUT

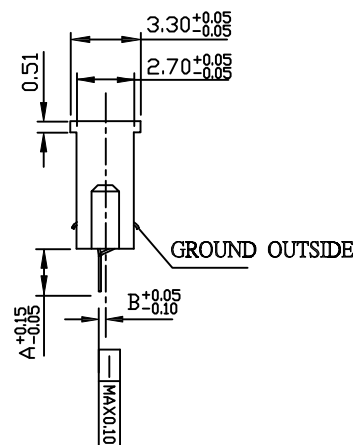

7CFSF-F0-0003-X

附表一


TYPE	A	B
S	2.0	0.3
B	2.20	0.40
L	2.65	0.30

NOTES:

- ELECTRICAL :**
CURRENT : 0.5A
CONTACT RESISTANCE : 40mΩ [MAX
DIELECTRIC WITHSTANDING : 500V AC
INSULATION RESISTANCE : 1000MΩ MIN
- MECHANICAL :**
CONTACT RETENTION TO HOUSING : 4.9N MIN
MATING FORCE : 28.8N MAX
UNMATING FORCE : 4.9N MIN
DURABILITY : 10,000 CYCLES
- MATERIAL :**
INSULATOR : LCP
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
- PLATING :**
CONTACT AREA : GOLD PLATED
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA: GOLD PLATED

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 称(TITLE) CF SOCKET 50PIN FEMALE	
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单位(UNIT) mm	料 号(PART NO.) 7CFSF-F0-0003-X	图 号(DWG NO.) 7CFSF-F0-0003-X	
审核(APPROVAL)	核 对(CHECKED)	制 图(DRAWN)	注 册 SCALE 1:1 PROJ.
			张 数 SHEET 1 / 1 更 改 REV B



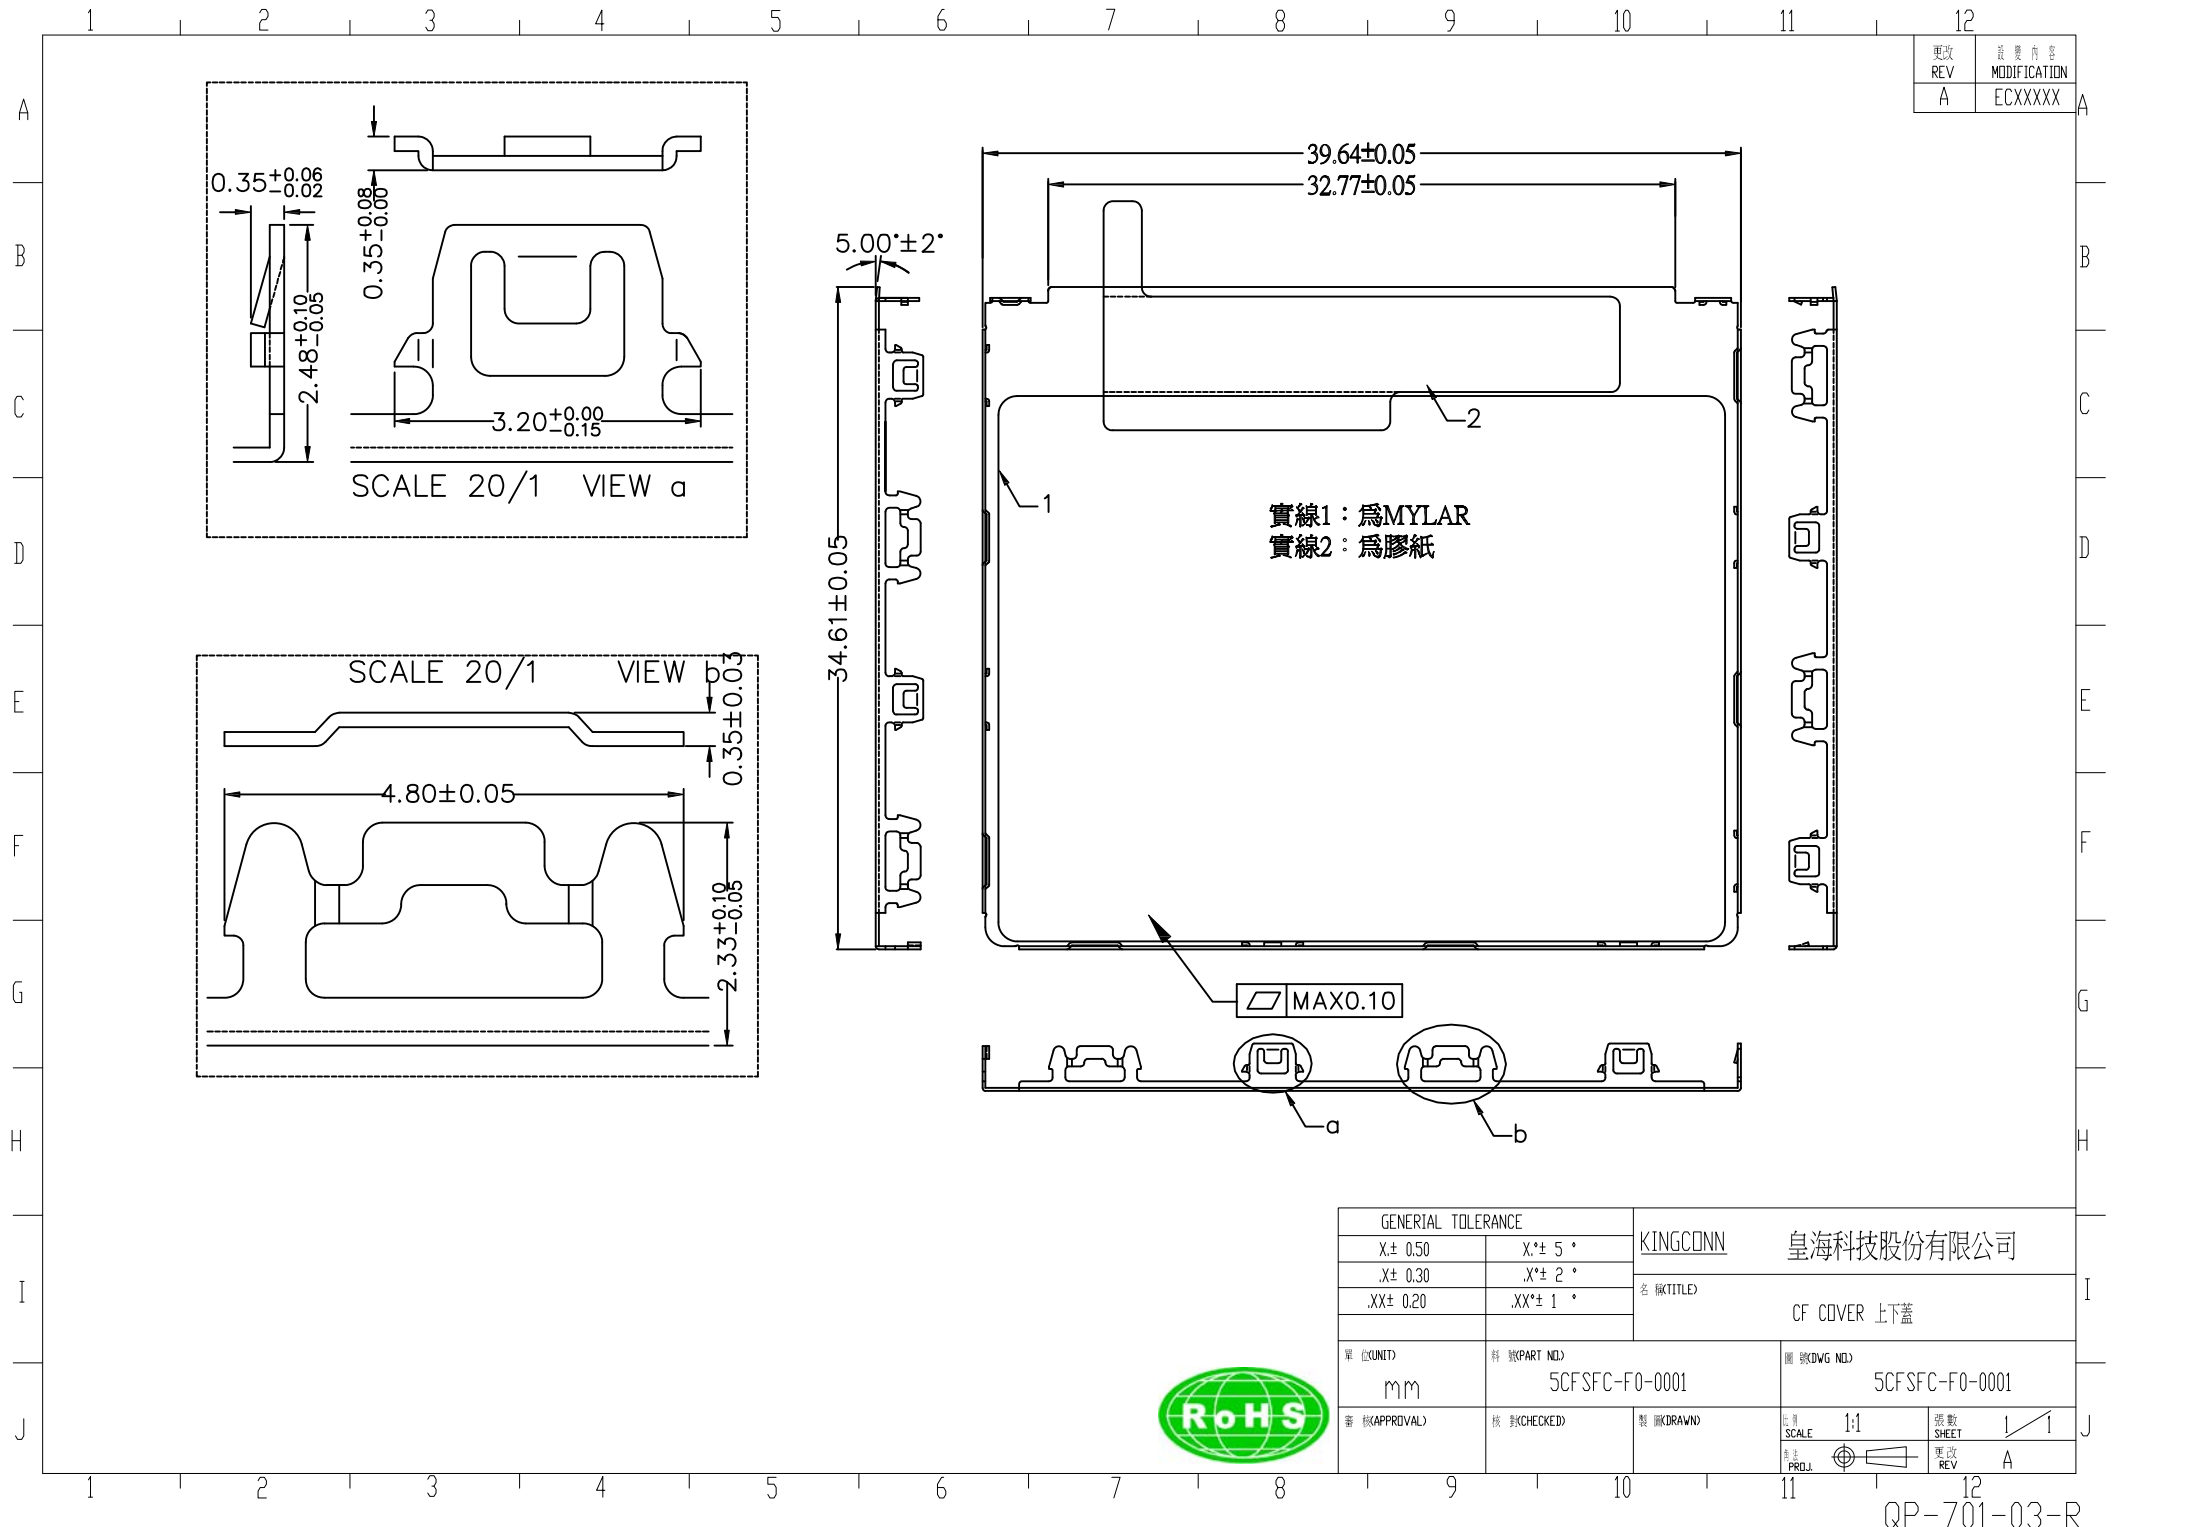


更改 REV	變更內容 MODIFICATION
A	ECXXXX

實線1：為MYLAR
實線2：為膠紙

MAX0.10

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名稱(TITLE)	CF COVER 上下蓋
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT)	料號(PART NO.)	圖號(DWG NO.)	
mm	5CFSFC-F0-0001	5CFSFC-F0-0001	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1/1 更改 REV A



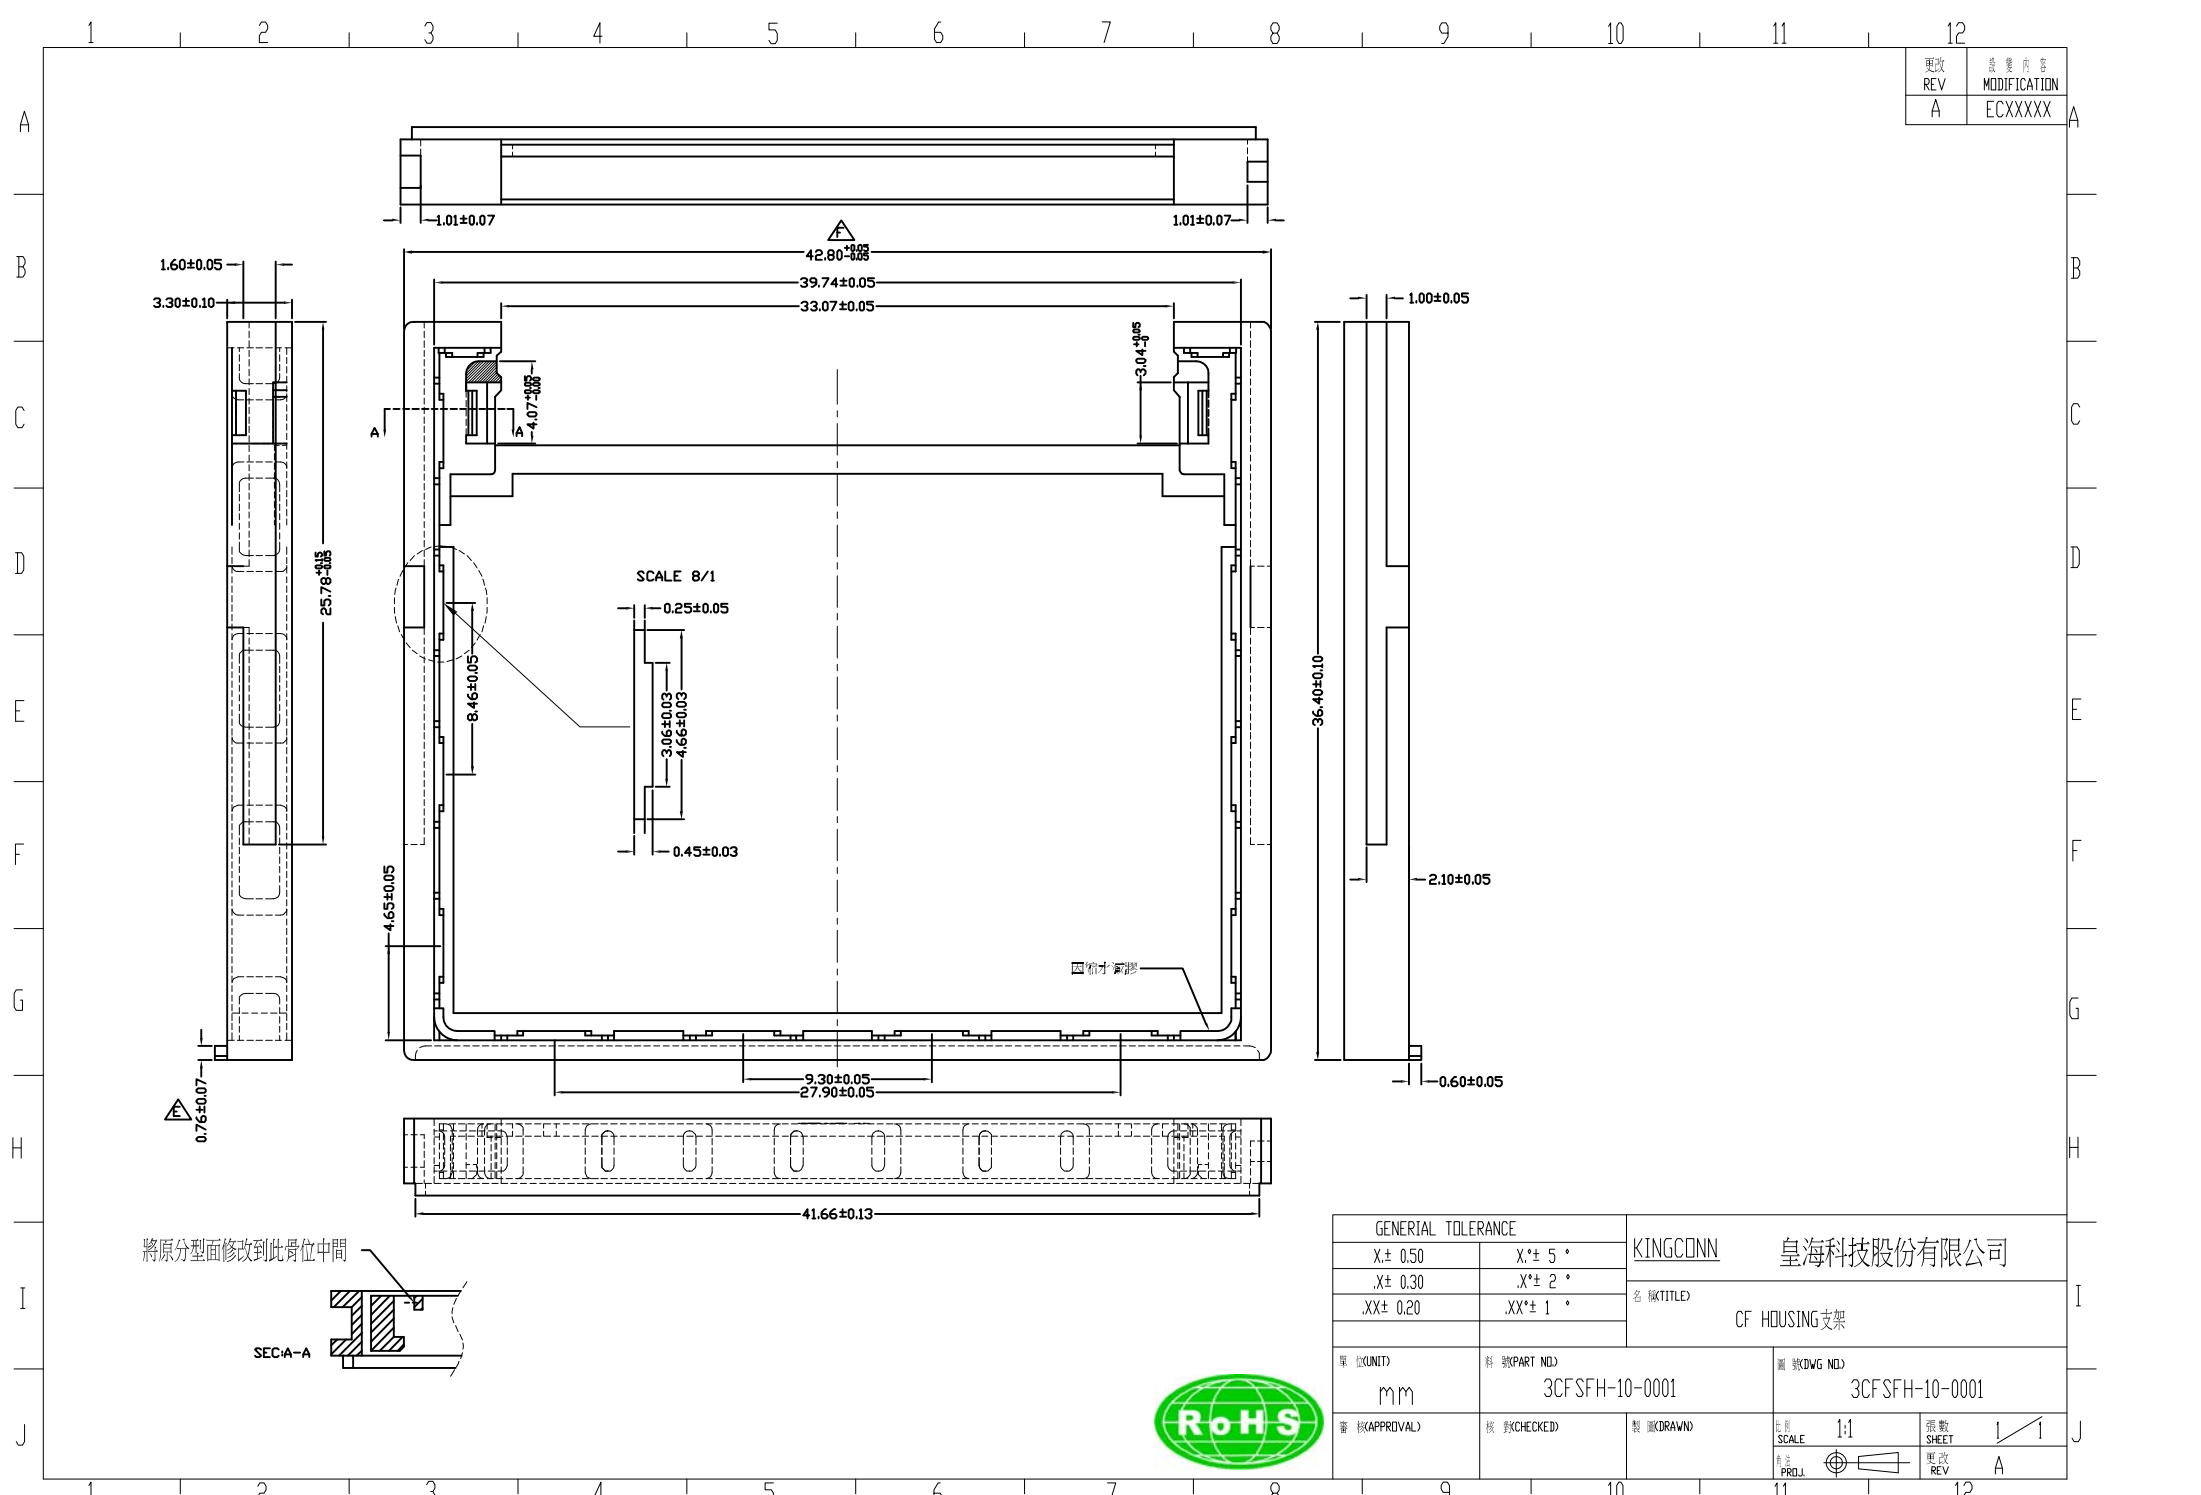

更改 REV	變更內容 MODIFICATION
A	ECXXXXX

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名稱(TITLE) CF HOUSING 支架	
X± 0.30	X*± 2 °		
XX± 0.20	XX*± 1 °		
單位(UNIT) mm	料號(PART NO.) 3CFSFH-10-0001	圖號(DWG NO.) 3CFSFH-10-0001	比例(SHEET) 1/1
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	帶數(SHEET) 1/1
			更改 REV A

QP-701-03-R