

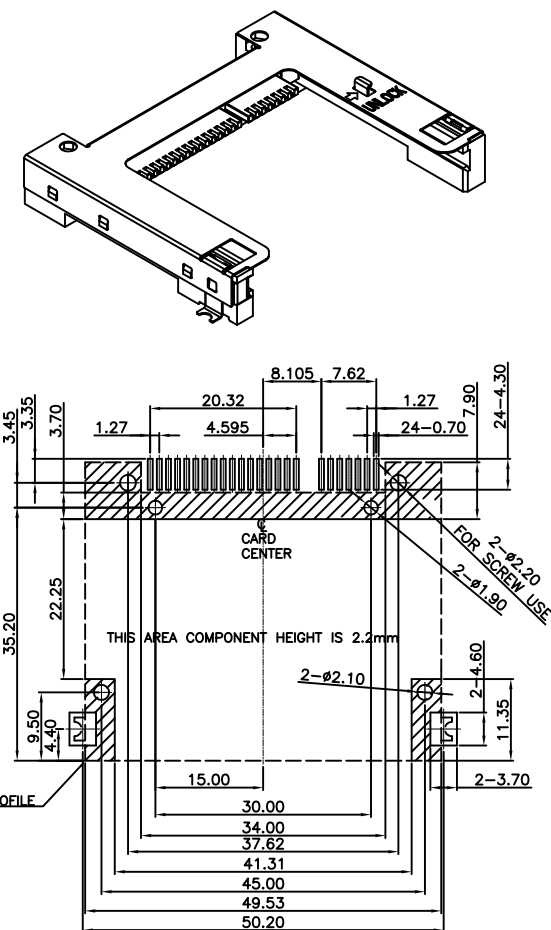


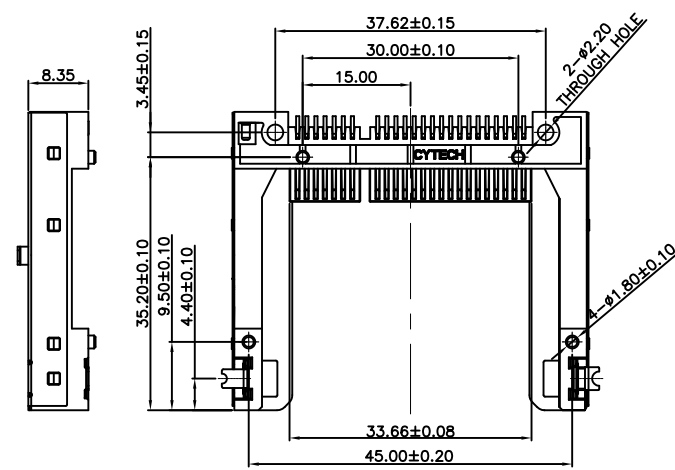

- NOTES:
1. MATERIAL:
 - (1) HOUSING: HIGH TEMPERATURE THERMOPLASTIC; COLOR IN BLACK, UL94V-0 RATED.
 - (2) CONTACT: HIGH PERFORMANCE COPPER ALLOY, 0.2mm THICKNESS
 - (3) METAL COVER: STAINLESS STEEL 304, 0.2mm THICKNESS
 2. CONTACT FINISH: UNDERPLATING NICKEL 50u" OVERALL. 10u" GOLD ON CONTACT AREA, LEAD FREE TIN 100u" ON SOLDER TAIL.
 3. OPERATING TEMPERATURE: -40°C~+85°C
 4. PACKING: TRAY PACKING

TOLERANCE: ±0.10
RECOMMENDED P.C. BOARD LAYOUT

GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
		名 称(TITLE)	CONNECTOR FOR C-FAST HOST TYPE R/A SMT NORMAL TYPE	
單 位(UNIT)	料 號(PART NO.)		圖 號(DWG NO.)	
mm	7CFST-CA-0002		7CFST-CA-0002-A	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE	張 數 SHEET
			1:1	1 / 1
			PROJ. 	更 改 REV
				A

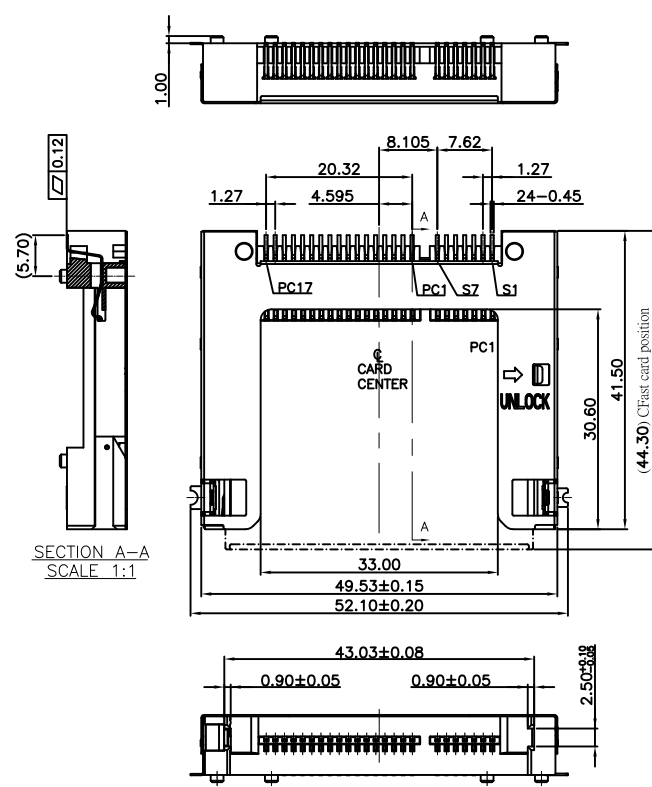