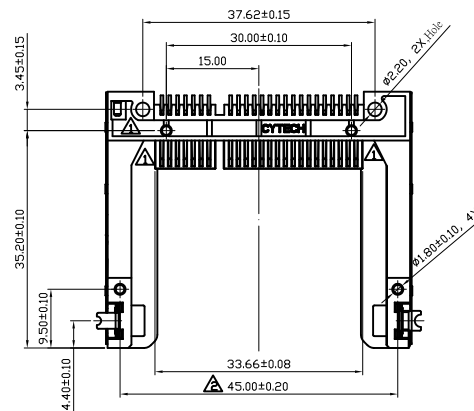
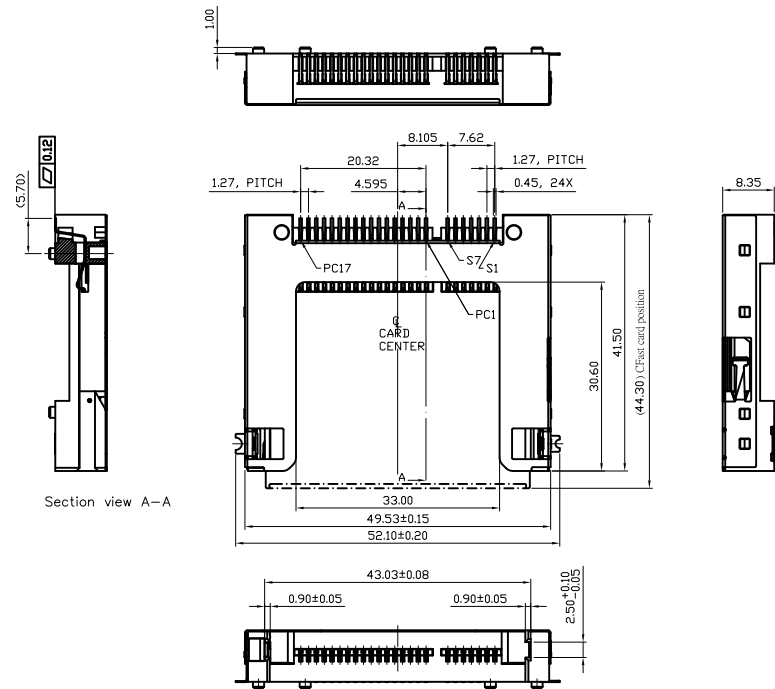


NOTES: 1. MATERIAL:


- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-3 Metal cover : Stainless steel sheet SUS304 0.2t.

2. PLATING:

Solder zone: 2.54 μ m (100 μ ") matte Tin 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

4. OPERATING TEMPERATURE: -40°C~+85°C

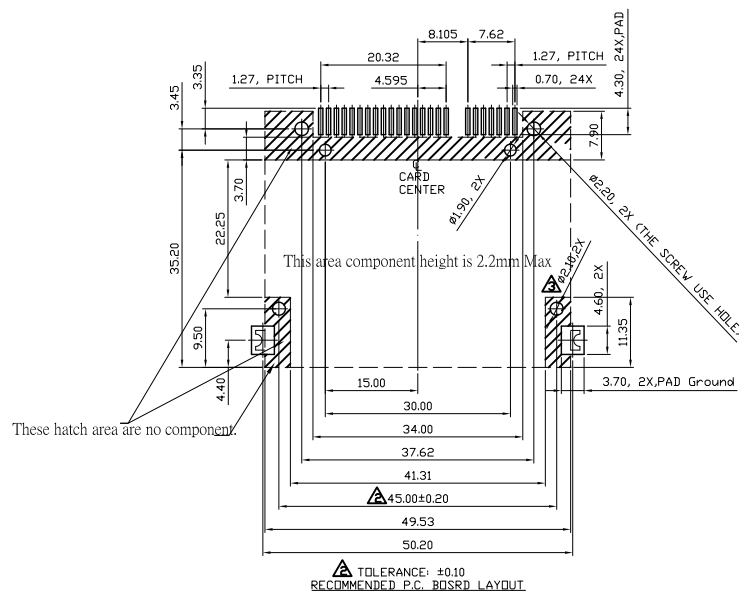

TOLERANCE: ±0.10
RECOMMENDED P.C. BOARD LAYOUT



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °	名 稱(TITLE) CFST HOST CONNECTOR NON-PUSH TYPE II,8.35H(缺口型)	
單位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7CFST-CA-0013	7CFST-CA-0013-A	
審 核(CHECKED)	製 圖(DRAWN)	比 對(SCALE)	張 數(SHEET)
		1:1	1 / 1
		角 度(ANGLE)	更 改(REV)
			A