
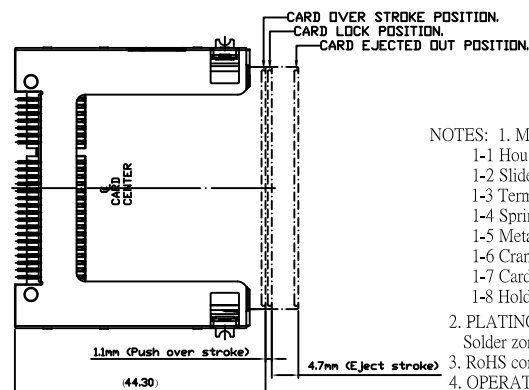
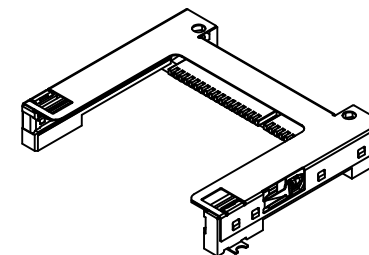
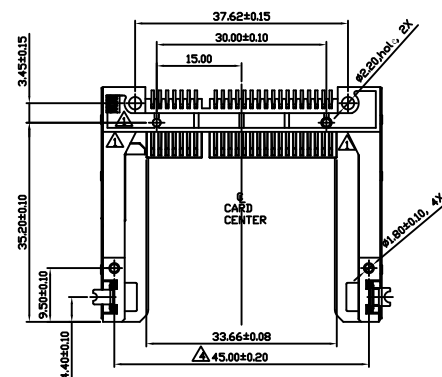






- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Slider : Engineering plastic , LCP with G.F reinforced , black per UL94 V-0 rate.
- 1-3 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-4 Spring : Piano thread
- 1-5 Metal cover : Stainless steel sheet SUS304 0.2t.
- 1-6 Crank : Stainless rod SUS 304.
- 1-7 Card lock : Stainless steel SUS 304.
- 1-8 Hold down : Phosphor Bronze , per JIS 5210 , 0.2t

Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

4. OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司 名 稱(TITLE) CFAST HOST CONNECTOR PUSH-PUSH TYPE II,8.35H(缺口型)	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
單位(UNIT)	料 號(PART NO)	圖 號(DWG NO)		
mm	7CFST-CA-0022	7CFST-CA-0022-A		
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比例 SCALE 1:1	張數 SHEET 1 / 1
			更改 REV 	A

