
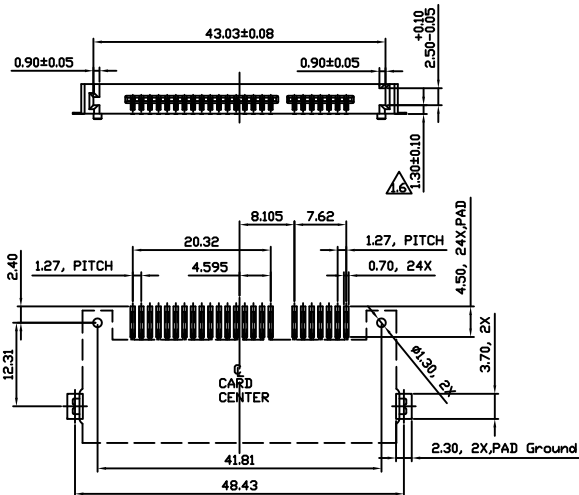

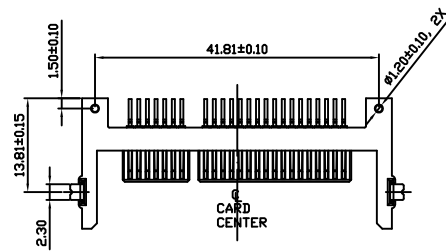



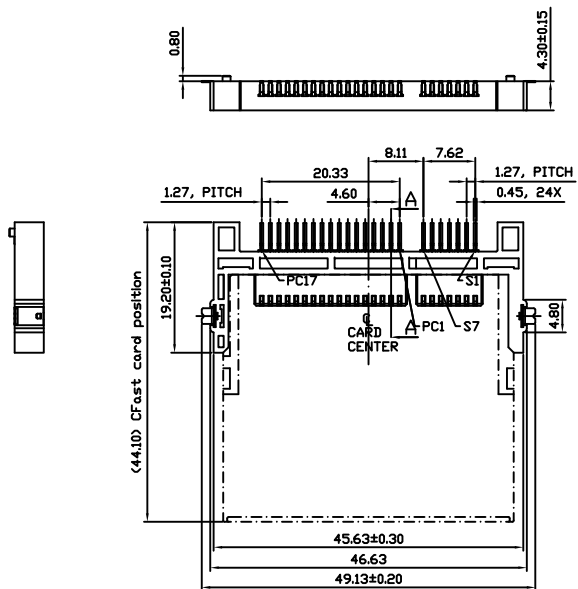

TOLERANCE: ±0.05
RECOMMENDED P.C.B LAYOUT

NOTES: 1. MATERIAL:

1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.

1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t

2. PLATING:

2-1 CONTACTS: 0.25 μ m (10 μ ") gold plating in contact area.and 2.54 μ m (100 μ ") min.

matte Tin in soldering zone, over entire contact underplated with 1.27 μ m (50 μ ") min. Nickel over all.

2-2 Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

4. Working temperature: -40°C~+85°C

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) Cfast host _ 4.3H簡易型 (短腳1)	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7CFST-CA-0029	7CFST-CA-0029-A	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1 角 度 PROJ.
			張 數 SHEET 1 / 1 更 改 REV A

