

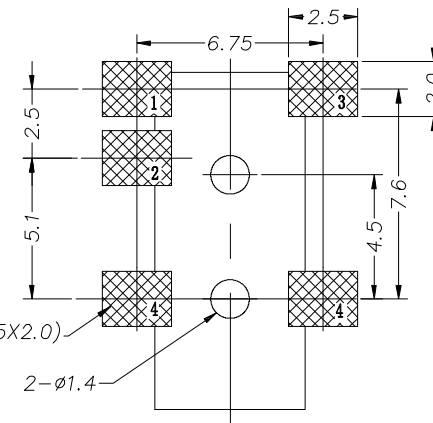
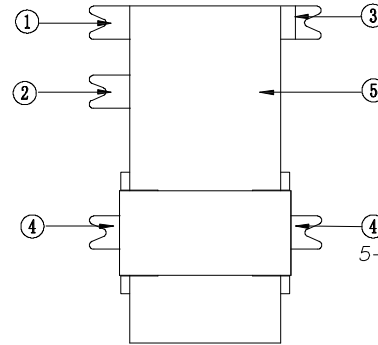
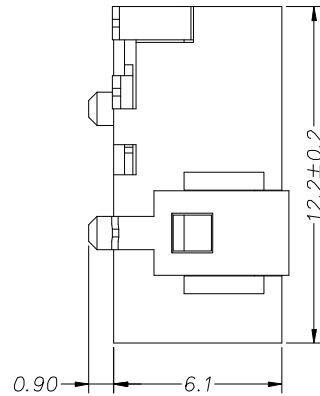
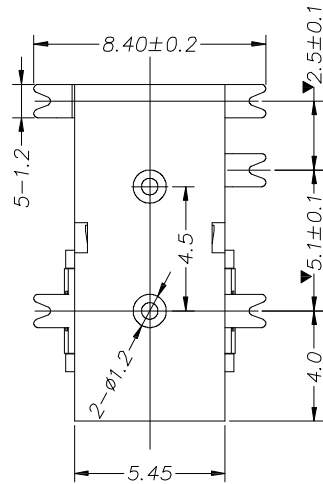



SPECIFICATION

- 1.Rating:DC 30V\1.0A;
- 2.Contact resistance: $\leq 30m\Omega$;
- 3.Insulation resistance: $\geq 100m\Omega$;
- 4.Withstand voltage:500VAC;
- 5.Insertion and extraction force: 3~30 N;
- 6.Operating Temperature:-30 C~70 C;
- 7.Life test:5,000 cycles.



P. C. B LAYOUT TOP VIEW

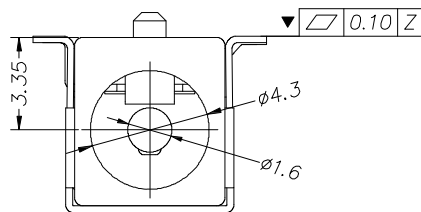

CIRCUIT DIAGRAM

⑤	HOUSING	HIGH TEMPERATURE RESISTANT PLASTIC
④	TERMINAL	COPPER ALLOY
③	TERMINAL	COPPER ALLOY
②	TERMINAL	COPPER ALLOY
①	TERMINAL	COPPER ALLOY
No.	PART NAME	MATERIAL

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 *	名 称(TITLE) DC JACK SMT	
.X± 0.30	.X*± 2 *		
.XX± 0.20	.XX*± 1 *		
图 样(DWG)	料 号(PART NO.)	图 样(DWG NO.)	
mm	7DCJK-F0-0024	7DCJK-F0-0024	
审 核(APPROVAL)	核 对(CHECKED)	制 图(DRAWN)	数 量(SHEET)
			1 / 1
		PROJ.	REV B

