



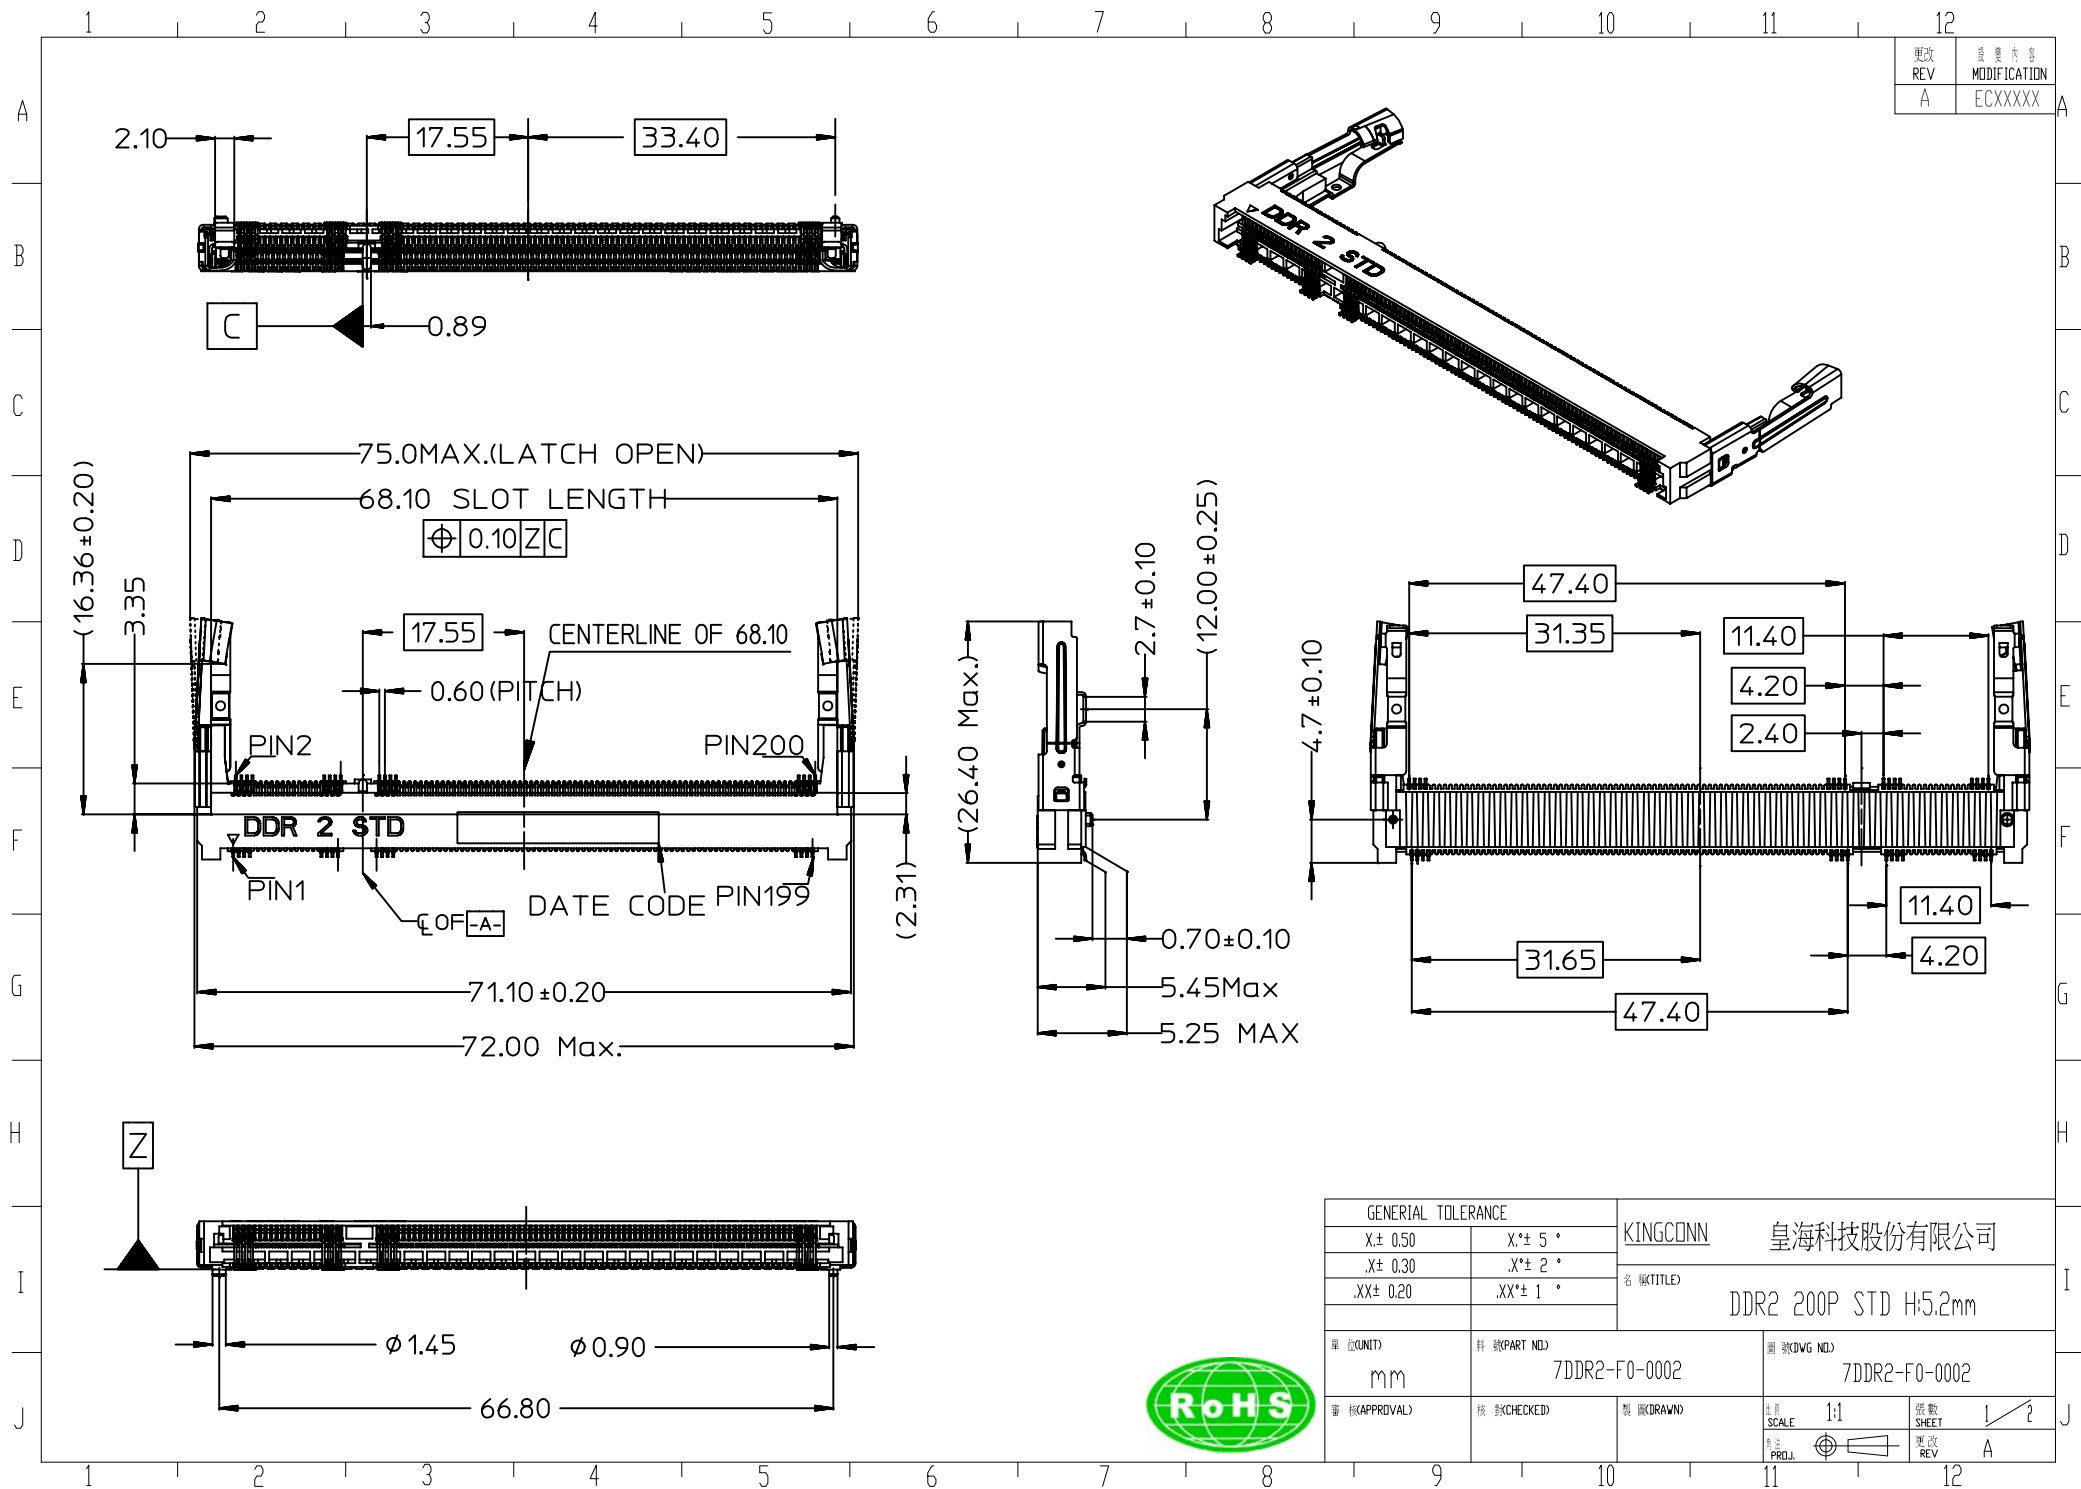

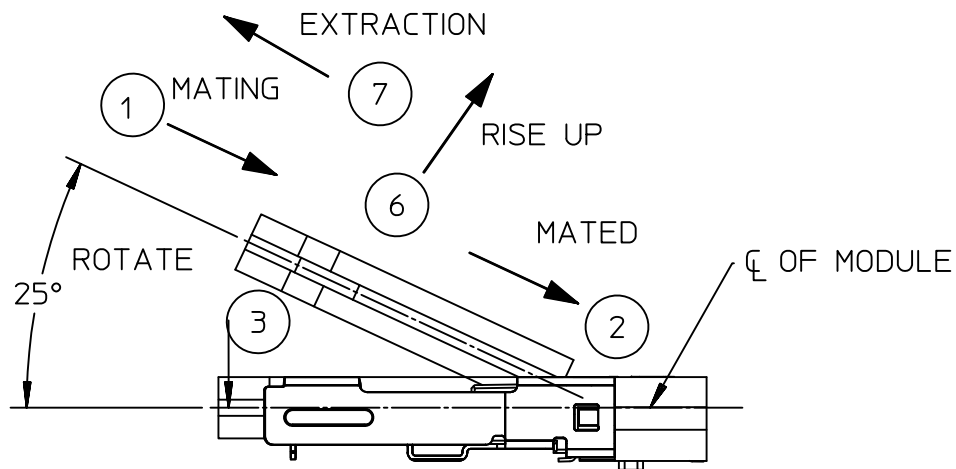

MATE: 5 → 4 LOCK
 UNLOCK 1 → 4 MATE AND UNMATE GUIDE
 UNMATE: 5 → 7

NOTE:

1. MATERIAL:

HOUSING: LCP, UL94V-0, COLOR: BLACK
 CONTACTS: COPPER ALLOY,
 LATCH: STAINLESS STEEL

2. FINISH:


CONTACT AREA: GOLD PLATED OVER 0.762 MICRON/30u" MIN.NICKEL.
 SOLDER TAIL AREA: GOLD FLASH OVER 0.762 MICRON/30u" MIN.NICKEL.
 LATCH: 1.27 MICRON/50u"MIN. MATT TIN OVER 0.762 MICRON/30u" MIN. NICKEL.

3. RECOMMENDED MODULE LAYOUT SHALL BE AS PER JEDEC SPECIFCATION

4. PRODUCT SPECIFICATION:N/A

5. PART SHALL BE PACKED: N/A

6. EDGE OF CONTACT PADS SHALL BE FREE OF BURRS AND EXTERNAL TIE BARS.

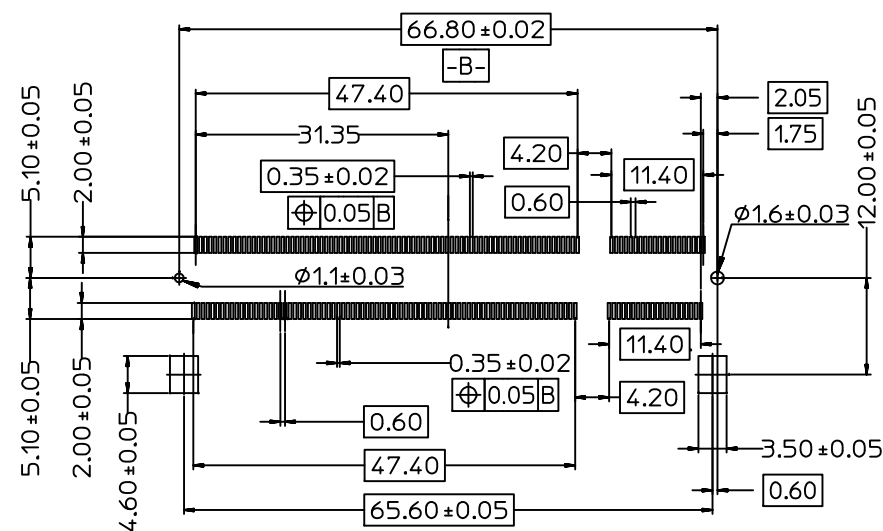

RECOMMEND PCB LAYOUT

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 (TITLE) DDR2 200P STD H:5.2mm	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 (UNIT)	料 (PART NO.)	图 (DWG NO.)	
mm	7DDR2-F0-0002	7DDR2-F0-0002	
审 (APPROVAL)	核 (CHECKED)	製 (DRAWN)	SCALE 1:1 SHEET 2/2 REV A

