

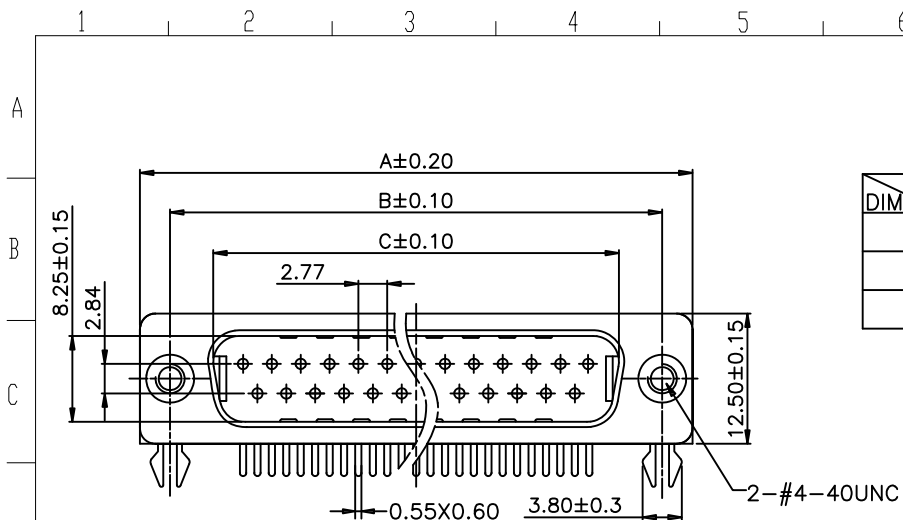
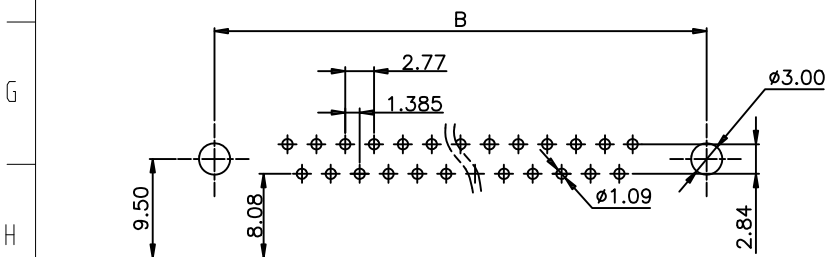




DIM \ PIN	DR9P	DR15P	DR25P	DR37P
A	30.80	39.20	53.05	69.40
B	25.00	33.30	47.05	63.50
C	16.90	25.25	38.95	55.40

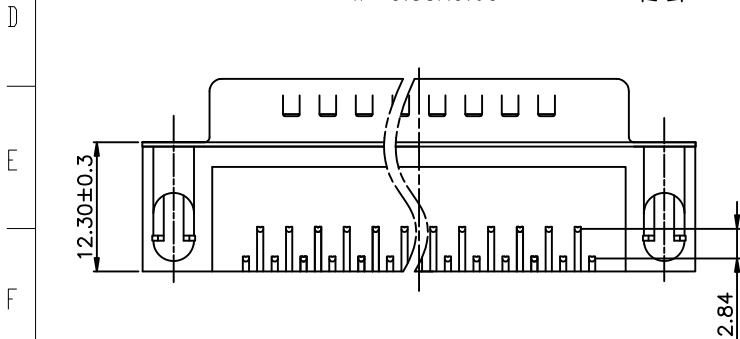

Recommended P.C.B Layout

1.MATERIAL:
INSULATOR: PBT + 30% GLASS FIBER UL94V-0
TERMINAL: COPPER ALLOY
GOLD ON CONTACT AREA AND TIN ON SOLDER TAIL
NICKEL PLATING ON BASE.

SEHLL: SPCC WITH NICKEL PLATING
GROUNDING CLIP: SPCC WITH TIN PLATING
SCREW: SPCC WITH NICKEL PLATING

2.ELECTRICAL:
INSULATOR RESISTANCE: 1000MEGOHMS MIN. 500V DC.
DIELECTRIC WITHSTANDING VOLTAGE: 500V DC R.M.S
VOLTAGE TATING: 40V AC (RMS) CONTINUOUS MAX.
CURRENT RATING: 2A MIN.
CONTACT RESISTANCE: 25 MILLIOHMS MAX.

3.ENVIRONMENTAL
TEMPERATURE RANGE:-25°C TO + 85°C.

4.ROHS COMPLIANT.

5.How to order:
7DSUB-XX-01XXXX

PIN數規格
09:09Pin
15:15Pin
25:25Pin
37:37Pin


顏色規格
B:藍色
K:鍍金
W:白色
G:綠色
Y:黃色

M:公頭
端子電鍍
1:半金1u"
4:半金10u"
5:半金15u"
6:半金30u"

Rivet option:

A:screw assembly type.
B:Rivet
C:rivet/screw assembly type.
screw spec:4.75*5.8*13mm
D:rivet/screw attachment type.
screw spec:4.75*5.8*13mm

Type:A



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 廠(TITLE) DR Male 9 PIN	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 (UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7DSUB-K1-01M09A	7DSUB-K1-01M09A	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWING)	SCALE 1:1
			張數 SHEET 1/1
			更改 REV A

