

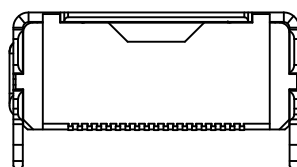

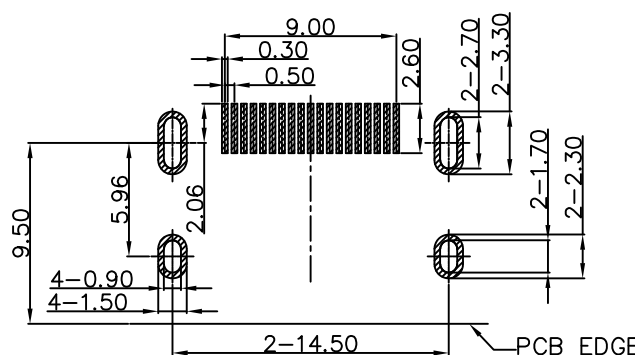
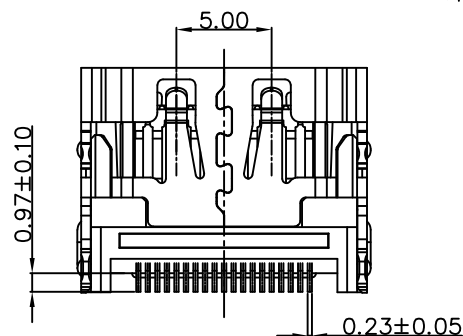


更改 REV	變更內容 MODIFICATION
A	EC06843
B	EC11020

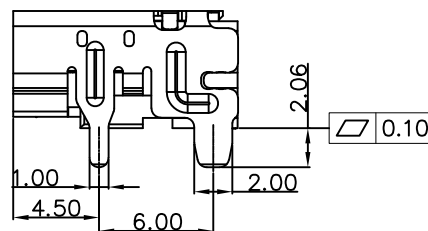

後視圖

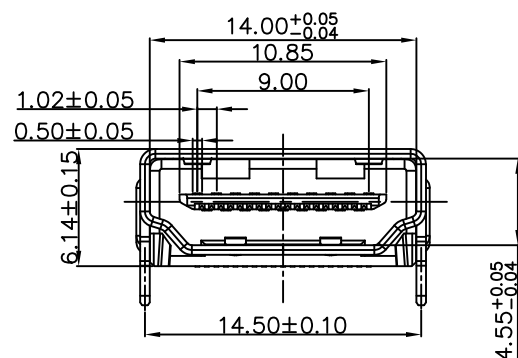

RECOMMEND PCB LAYOUT (T=1.00)

PCB TOLERANCE: ± 0.05

1.Material:

InsertMolding:LCP UL 94V-0 Black

Contact:Copper alloy,T=0.20mm

Shell:SPCC,T=0.50mm

2.Electrical

1.1.Rated Voltage:40V AC/DC maximum

1.2.Rated Current:0.3A max.

1.3.Dielectric strength:150V AC/1 minute

1.4.Insulation Resistance:150V DC 10M Ω min.

1.5.Contact Resistance:30m Ω Max.

3.Mechanical

2.1.Insertion Force Max:4.0kgf max.

2.2.Removal Force Min:1.0kgf min. , 4.0kgf max.

2.3.Durability: 10000 cycles at 100 $\pm$ 50 cycles per hour

4.Plating

4.1.Terminal:Contact area:1u" gold plate over 50u" NI min.

Solder area:100u" pure TIN plate over 50u" NI min.

4.2.Shell: Ni:100u"min.

5.Ambient Temperature:-55°C To +85°C

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X $\pm$ 0.50	X* $\pm$ 5°	名 稱(TITLE) HDMI A TYPE SMT	
.X $\pm$ 0.30	.X* $\pm$ 2°		
.XX $\pm$ 0.20	.XX* $\pm$ 1°		
單 位(UNIT) mm	料 號(PART NO.) 7HDMI-F0-0011	圖 號(DWG NO.) 7HDMI-F0-0011-B	第 頁 SCALE 1:1
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	張 數 SHEET 1/1
			更 改 REV B

