




更改 REV	数量 MODIFICATION
A	ECXXXXX

Electrical Data:
Current Rating:1.5Amp Max
Dielectric Withstanding:500V AC for 1 minute
Contact Resistance:<30 Milliohms
Insulation Resistance:>1000 Megaohms
Operating Temperature:-55°C - +85°C

Construction:
Hole through type insulator:Class Filled Polyester
Surface mount type Insulator:High temperature plastic
Flammability Rating:LCP+30%GF UL94V-0
Contacts:Copper Alloy
Shell:Copper Alloy
Contacts:Selective Gold on surface contact ares
Shell:Ni contact ares

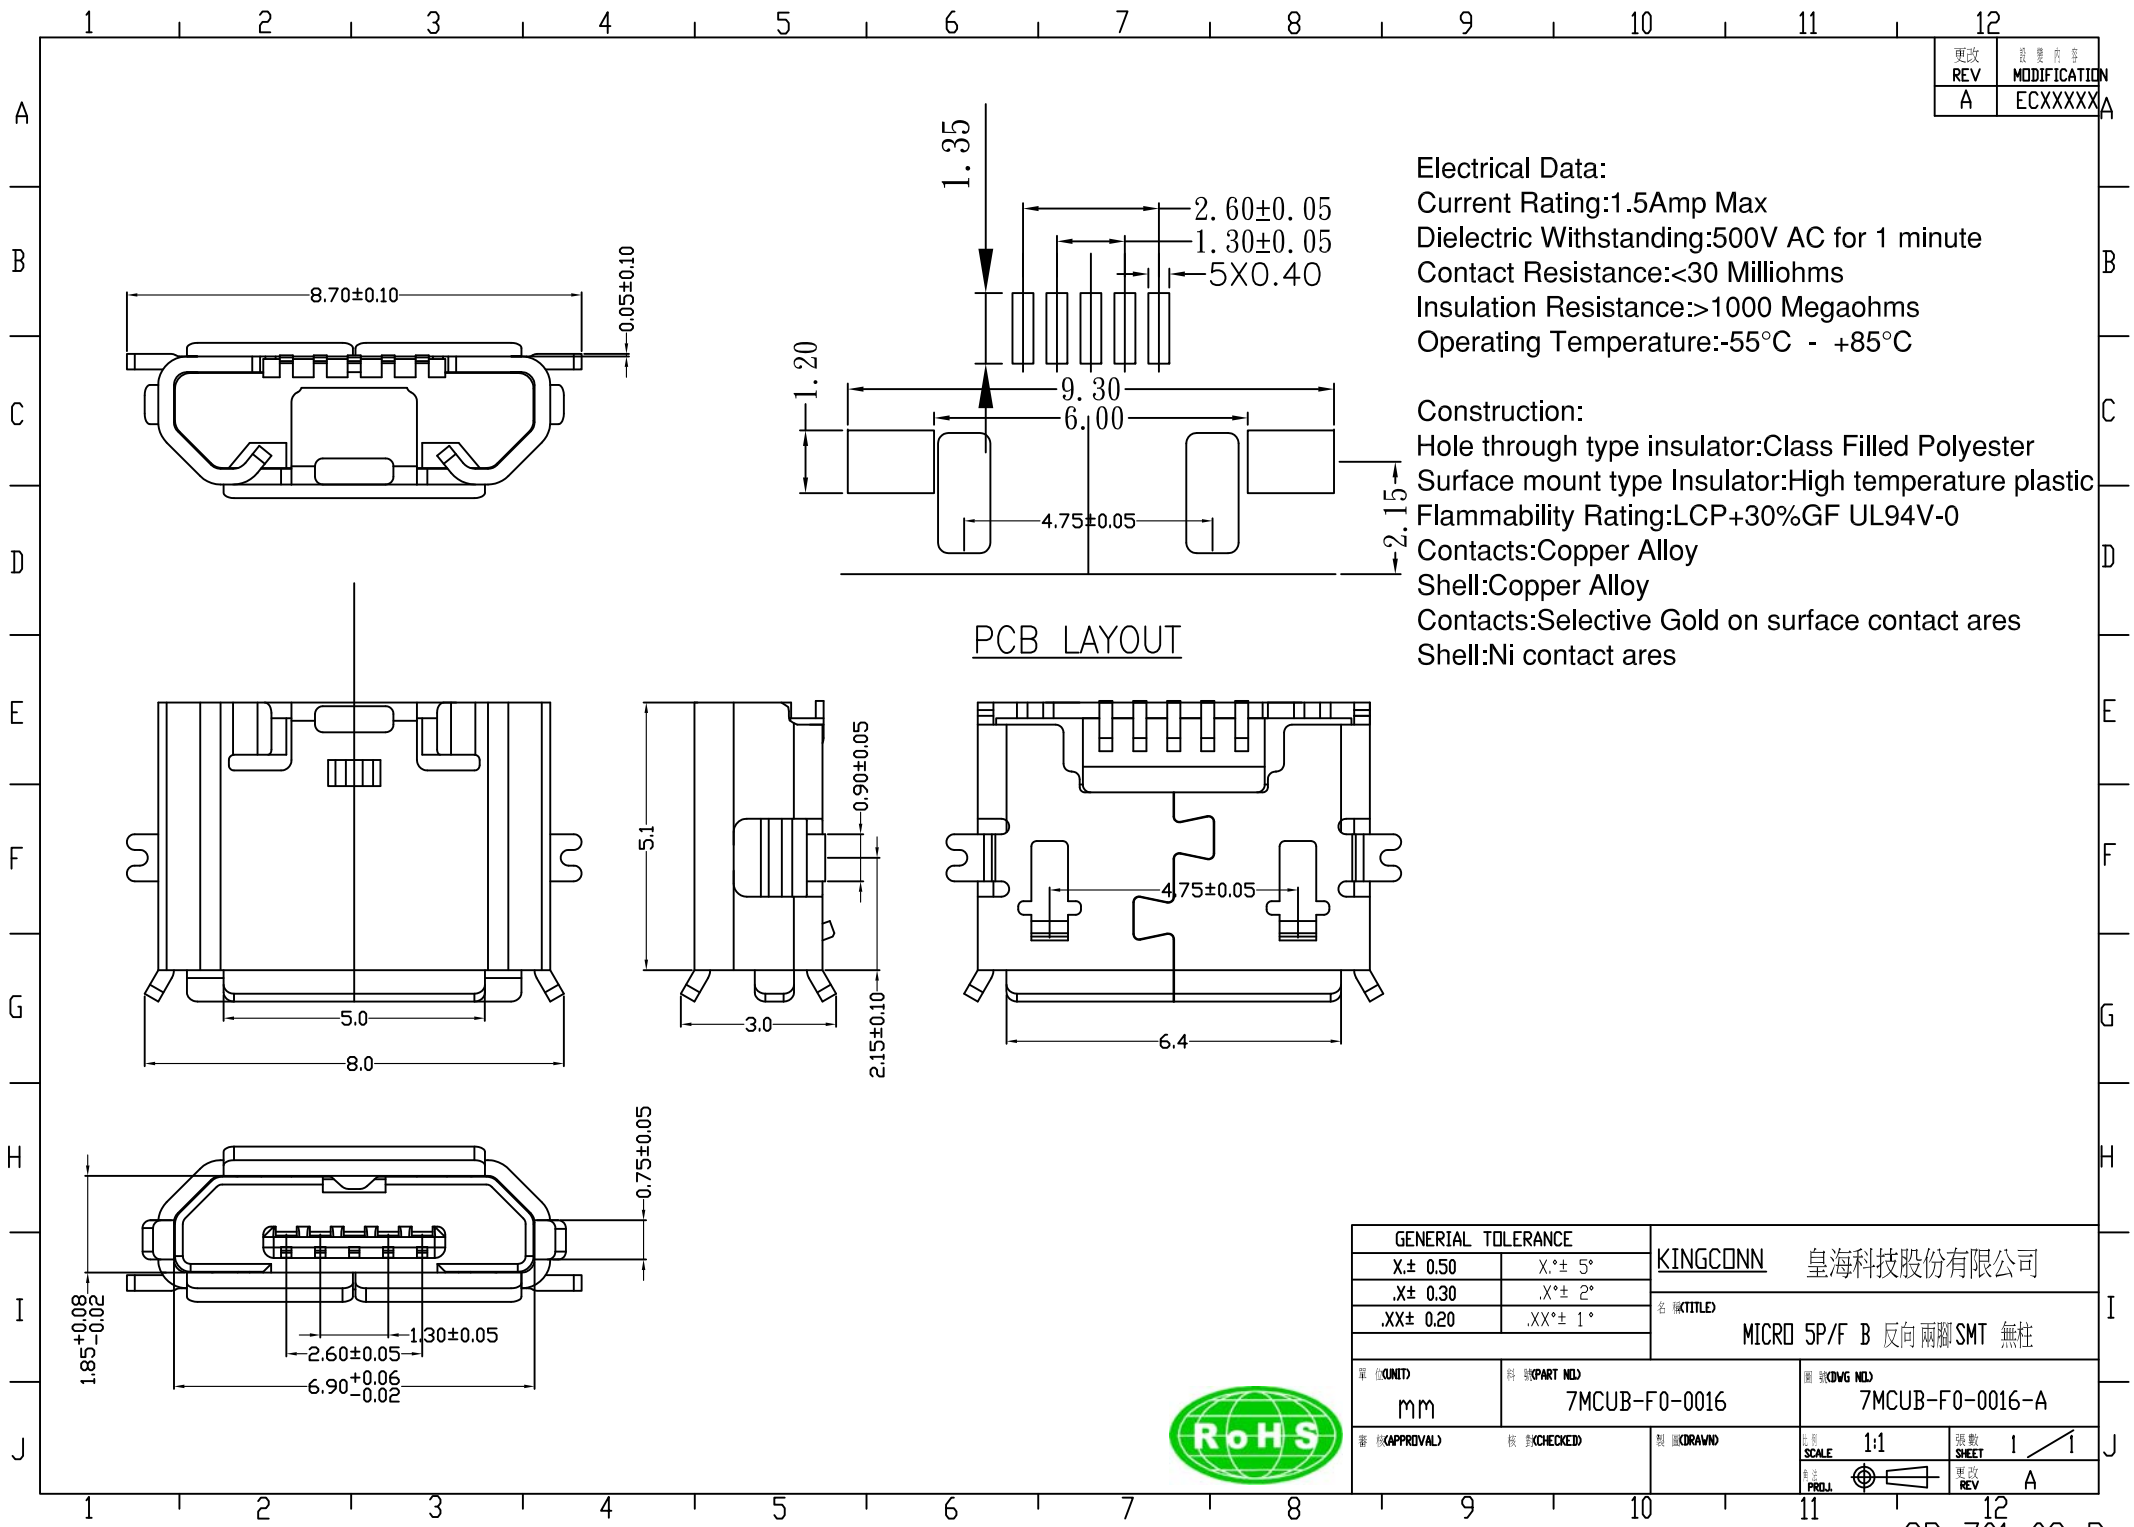

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X $\pm$ 0.50	X° $\pm$ 5°	名 稱(TITLE) MICRO 5P/F B 反向兩腳SMT 無柱	
.X $\pm$ 0.30	.X° $\pm$ 2°		
.XX $\pm$ 0.20	.XX° $\pm$ 1°		
單 位(UNIT) mm	料 號(PART NO) 7MCUB-F0-0016	圖 號(DWG NO) 7MCUB-F0-0016-A	比例 SCALE 1:1
審 核(CHECKED)	製 圖(DRAWN)	張 數 SHEET 1 / 1	更 改 REV A