

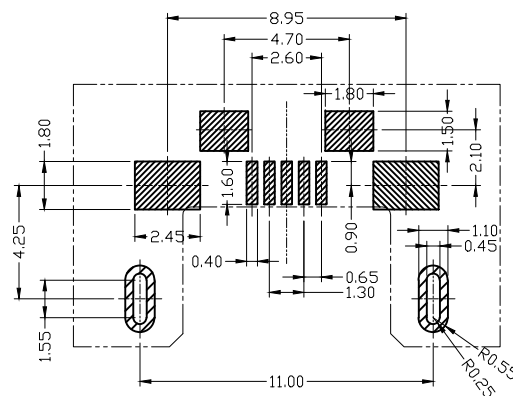
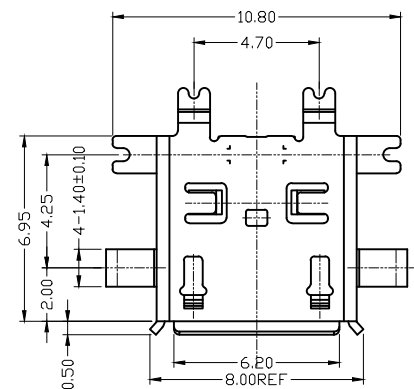
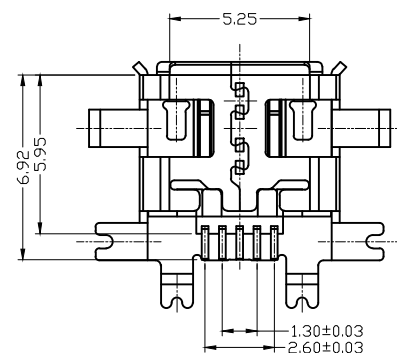



更改 REV	变更记录 MODIFICATION
A	ECN04187
B	ECN04236

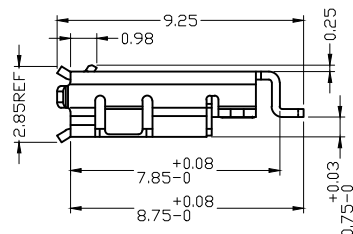

RECOMMEND PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE ± 0.05

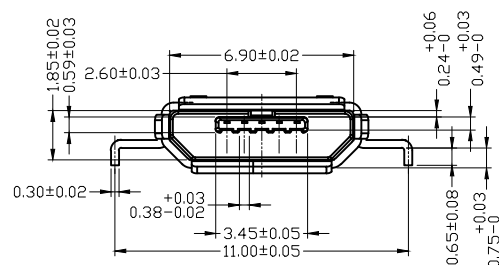

NOTES:

1.MECHANICAL:

MATING FORCE: 35N MAX.

UNMATING FORCE: 10N MIN,INITIAL.

8~20N AFTER 10000 CYCLES.

DURABILITY: 5000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.0A

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC

CONTACT RESISTANCE: 30 mΩ MAX INITIAL;

40 mΩ MAX AFTER 10000 CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$

5%-SALT-SOLUTION CONCENTRATION.

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X $\pm$ 0.50	X* $\pm$ 5 °		
.X $\pm$ 0.30	.X* $\pm$ 2 °	名 稱(TITLE) MICRO USB 5P 六腳沉板 (0.75H) 翻邊母座	
.XX $\pm$ 0.20	.XX* $\pm$ 1 °		
單 位(UNIT) mm	料 號(PART NO.) 7MCUB-F0-0022	圖 號(DWG NO.) 7MCUB-F0-0022	第 數 SHEET 1 / 1
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	
SCALE 1:1	PROJ.	圖 號 REV B	

