

MICRO-USB-5PIN SOLDER TAIL

焊線式

特性：Specifications

電器 Electrical:

接觸阻抗：Contact Resistance
30milliohms MAX耐電壓：Dielectric Withstanding Voltage
50V AC AT sea Level絕緣阻抗：Insulation Resistance:
100MEGA ohms MIN

材料：Material:

塑膠：Housing:Hing Temperature Thermoplastics,
UL 94V-0LCP料耐高溫塑膠和

端子：Contact:C2680

外殼：copper: 不鏽鋼殼。


電鍍：Fini

端子：Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Tails

接觸點鍍金0.5u，腳鍍錫

外殼：Shell:

Tin/Lead Plating 鍍鎳

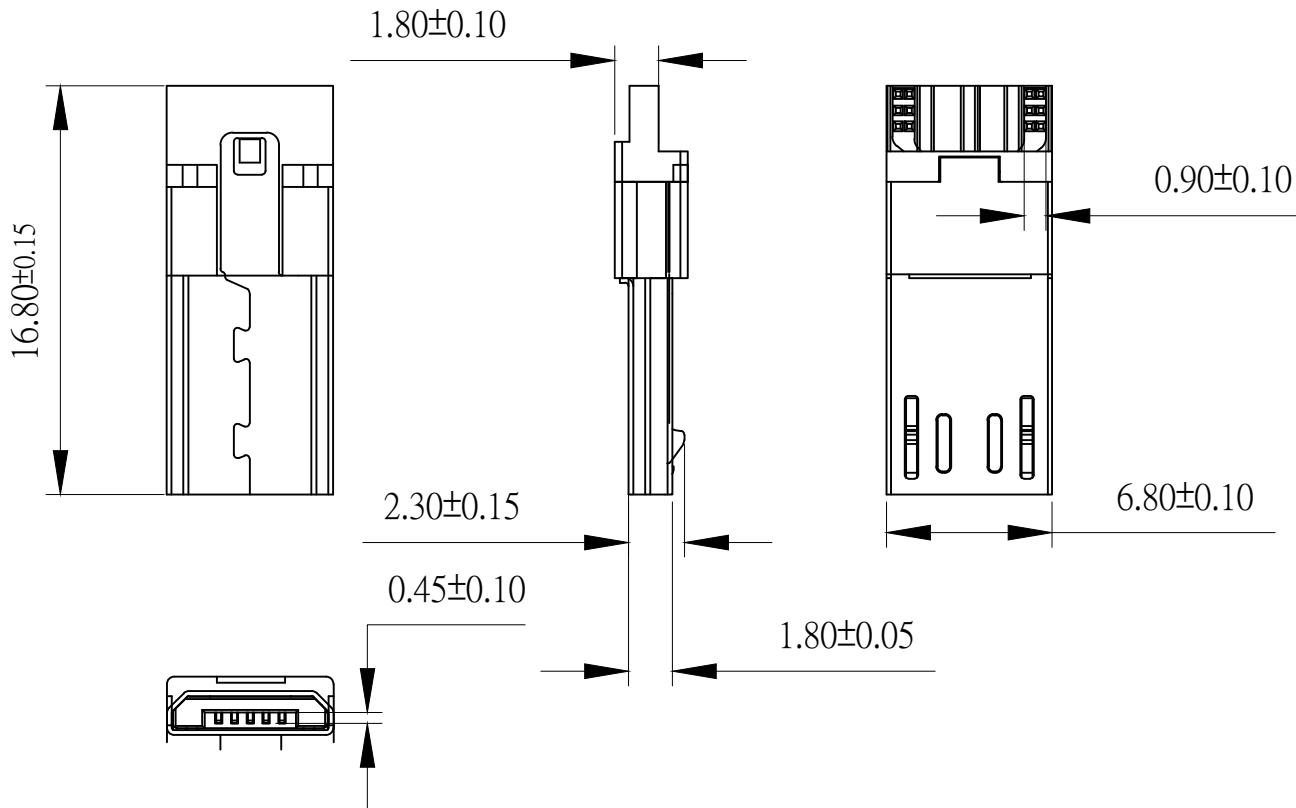

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
		名 稱(TITLE) MICRO USB 5P/F	
單位(UNIT) mm	料 號(PART NO.) 7MCUB-F0-0026	圖 號(DWG NO.) 7MCUB-F0-0026	圖 樣(SHEET) 1 / 1 更改 REV A
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	
		比 例(SCALE) 1:1	

