


更改 REV	變更內容 MODIFICATION
A	ECXXXXX



規格說明:Specifications:

電氣特性:Electrical:

1. 額定電流: Current Rating
1.0A/contact terminal
2. 額定電壓: Voltage Rating
30V DC
3. 接觸阻抗:Contact Resistance
50 milliohms MAX
4. 耐電壓:Dielectnic Withstanding Voitage:
300 V AC AT Sea Levot
5. 絕緣阻抗:Insulation Resistance:
100MEGA ohms MIN

物理性能:Physical properties:





1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.0kgf(MAX)
Unmate force:0.7kgf(MIN)
2. 端子保持力: Terminal retention force
0.5kgf(MIN)

原材料:Raw material:


1. 塑膠:Plastic cement:
Hing Temperature Tnermaplastics,
UL 94V-0 LCP Black
2. 端子:Contact:Copper Alloy C5191
3. 外殼:Shell: Copper Alloy C2680

電鍍:Finish:

1. Contact:Plated gold in Mating Area;
Tin On Solder Tails.
2. 外殼:Shell:Nickel Plating.

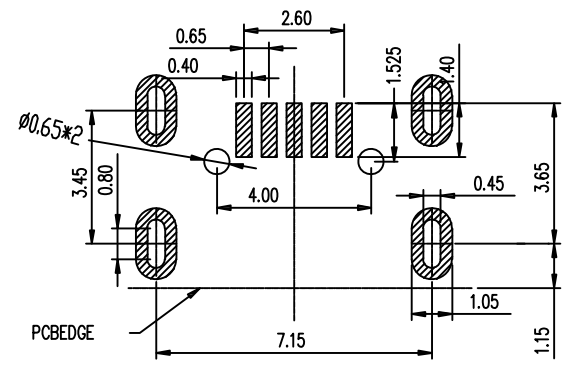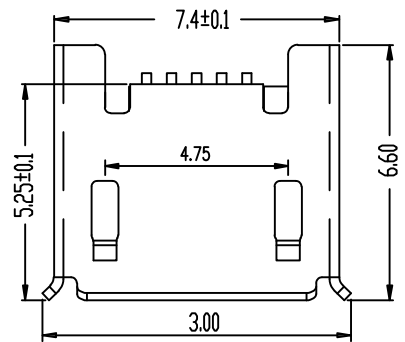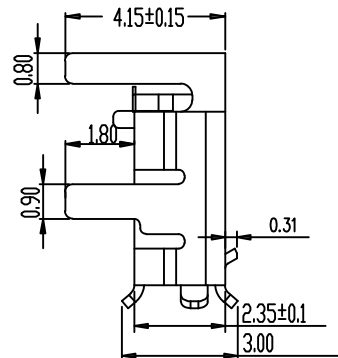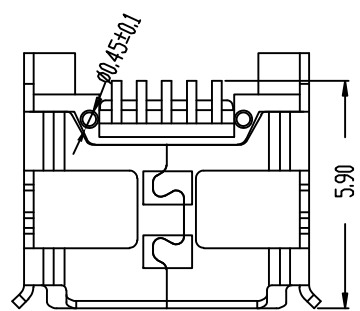

RECOMMENDED PCB LAYOUT (TOL : ±0.05)

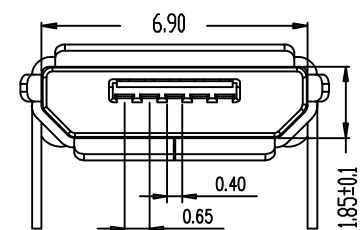

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLED) MICRO USB 5P/F 端子加長0.35 四腳插板腳長1.8	
.X± 0.30	.X*± 2 °		
XX± 0.20	XX*± 1 °		
單 位(UNIT)	料 號(PART NO)	圖 號(DWG NO)	
mm	7MCUB-F0-0030	7MCUB-F0-0030	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	註 釋 SCALE 1:1 SHEET 1 / 1 PROJ. 更改 REV A