








NOTES:

MATERIALS

1. HOUSING:
HI-TEMP.PLASTIC UL 94V-0 BLACK
- 2.COCONTACT
COPPER ALLOY,T=0.15mm
GOLD PLATED ON CONTACT AREA
GOLD FLASH PLATED ON SOLDER TAILS UNDER NICKEL PLAED
- 3.SHELL:
STAINLESS STEEL T=0.3mm
MATTE TIN PLATING OVERALL UNDER NICKEL PLATED

SPECIFICATIONS

- 1.VOLTAGE RATING:30V AC
- 2.CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A(FOR TERMINAL NO.2,3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A(FOR TERMINAL NO.1 AND 5)
0.5A(FOR TERMINAL NO.2,3 AND 4)
- 3.INSULATION RESISTANCE:100M MINIAT 100V DC
- 4.DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- 5.CONTACT RESISTANCE:30m MAX.
- 6.OPERATING TEMPERATURE:-30 TO +80?

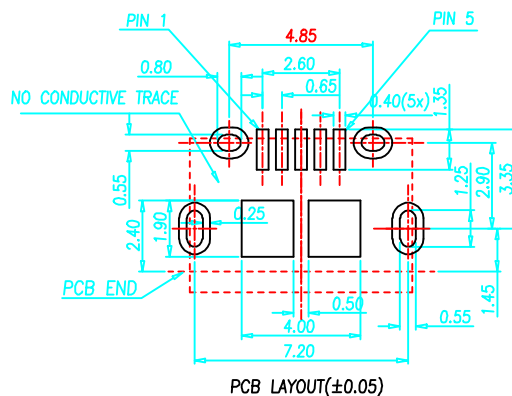

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
		名 稱(TITLE)	
		MICRO USB 5PIN RECEPTACLE DIP	
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7MCUB-FA-0011	7MCUB-FA-0011-B	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 尺 SCALE 1:1
			張 數 SHEET 1 / 1
			更 改 REV B