




特性: Specifications:
电器: Electrical:
接触阻抗: Contact Resistance
30 milliohms Max
耐电压: Dielectric Withstanding Voltage:
500V AC Sea Level
绝缘阻抗: Insulation Resistance:
100 MEGA ohms MIN
材料: Material:
塑胶Housing: High Temperature Thermoplastic
LCP 耐高温塑胶
端子: Contact: Copper Alloy 铜合金
铜壳Shell: Copper Alloy 铜合金
电镀Finish:
端子Contact: Plated Gold In Mating Area:
Tin On Solder Tails
接触点镀金. 脚镀锡
铜壳: Shell:
Nickel/Plating 镀镍

Recommended PCB Layout

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
NAME (TITLE)		MINI USB5P 180度 直插彎腳	
單位(UNIT)	料號(PART NO.)	圖號(DWG NO.)	
mm	7MNSB-F0-0030	7MNSB-F0-0030	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1/1
		繪圖(DRAWN)	更改 REV A

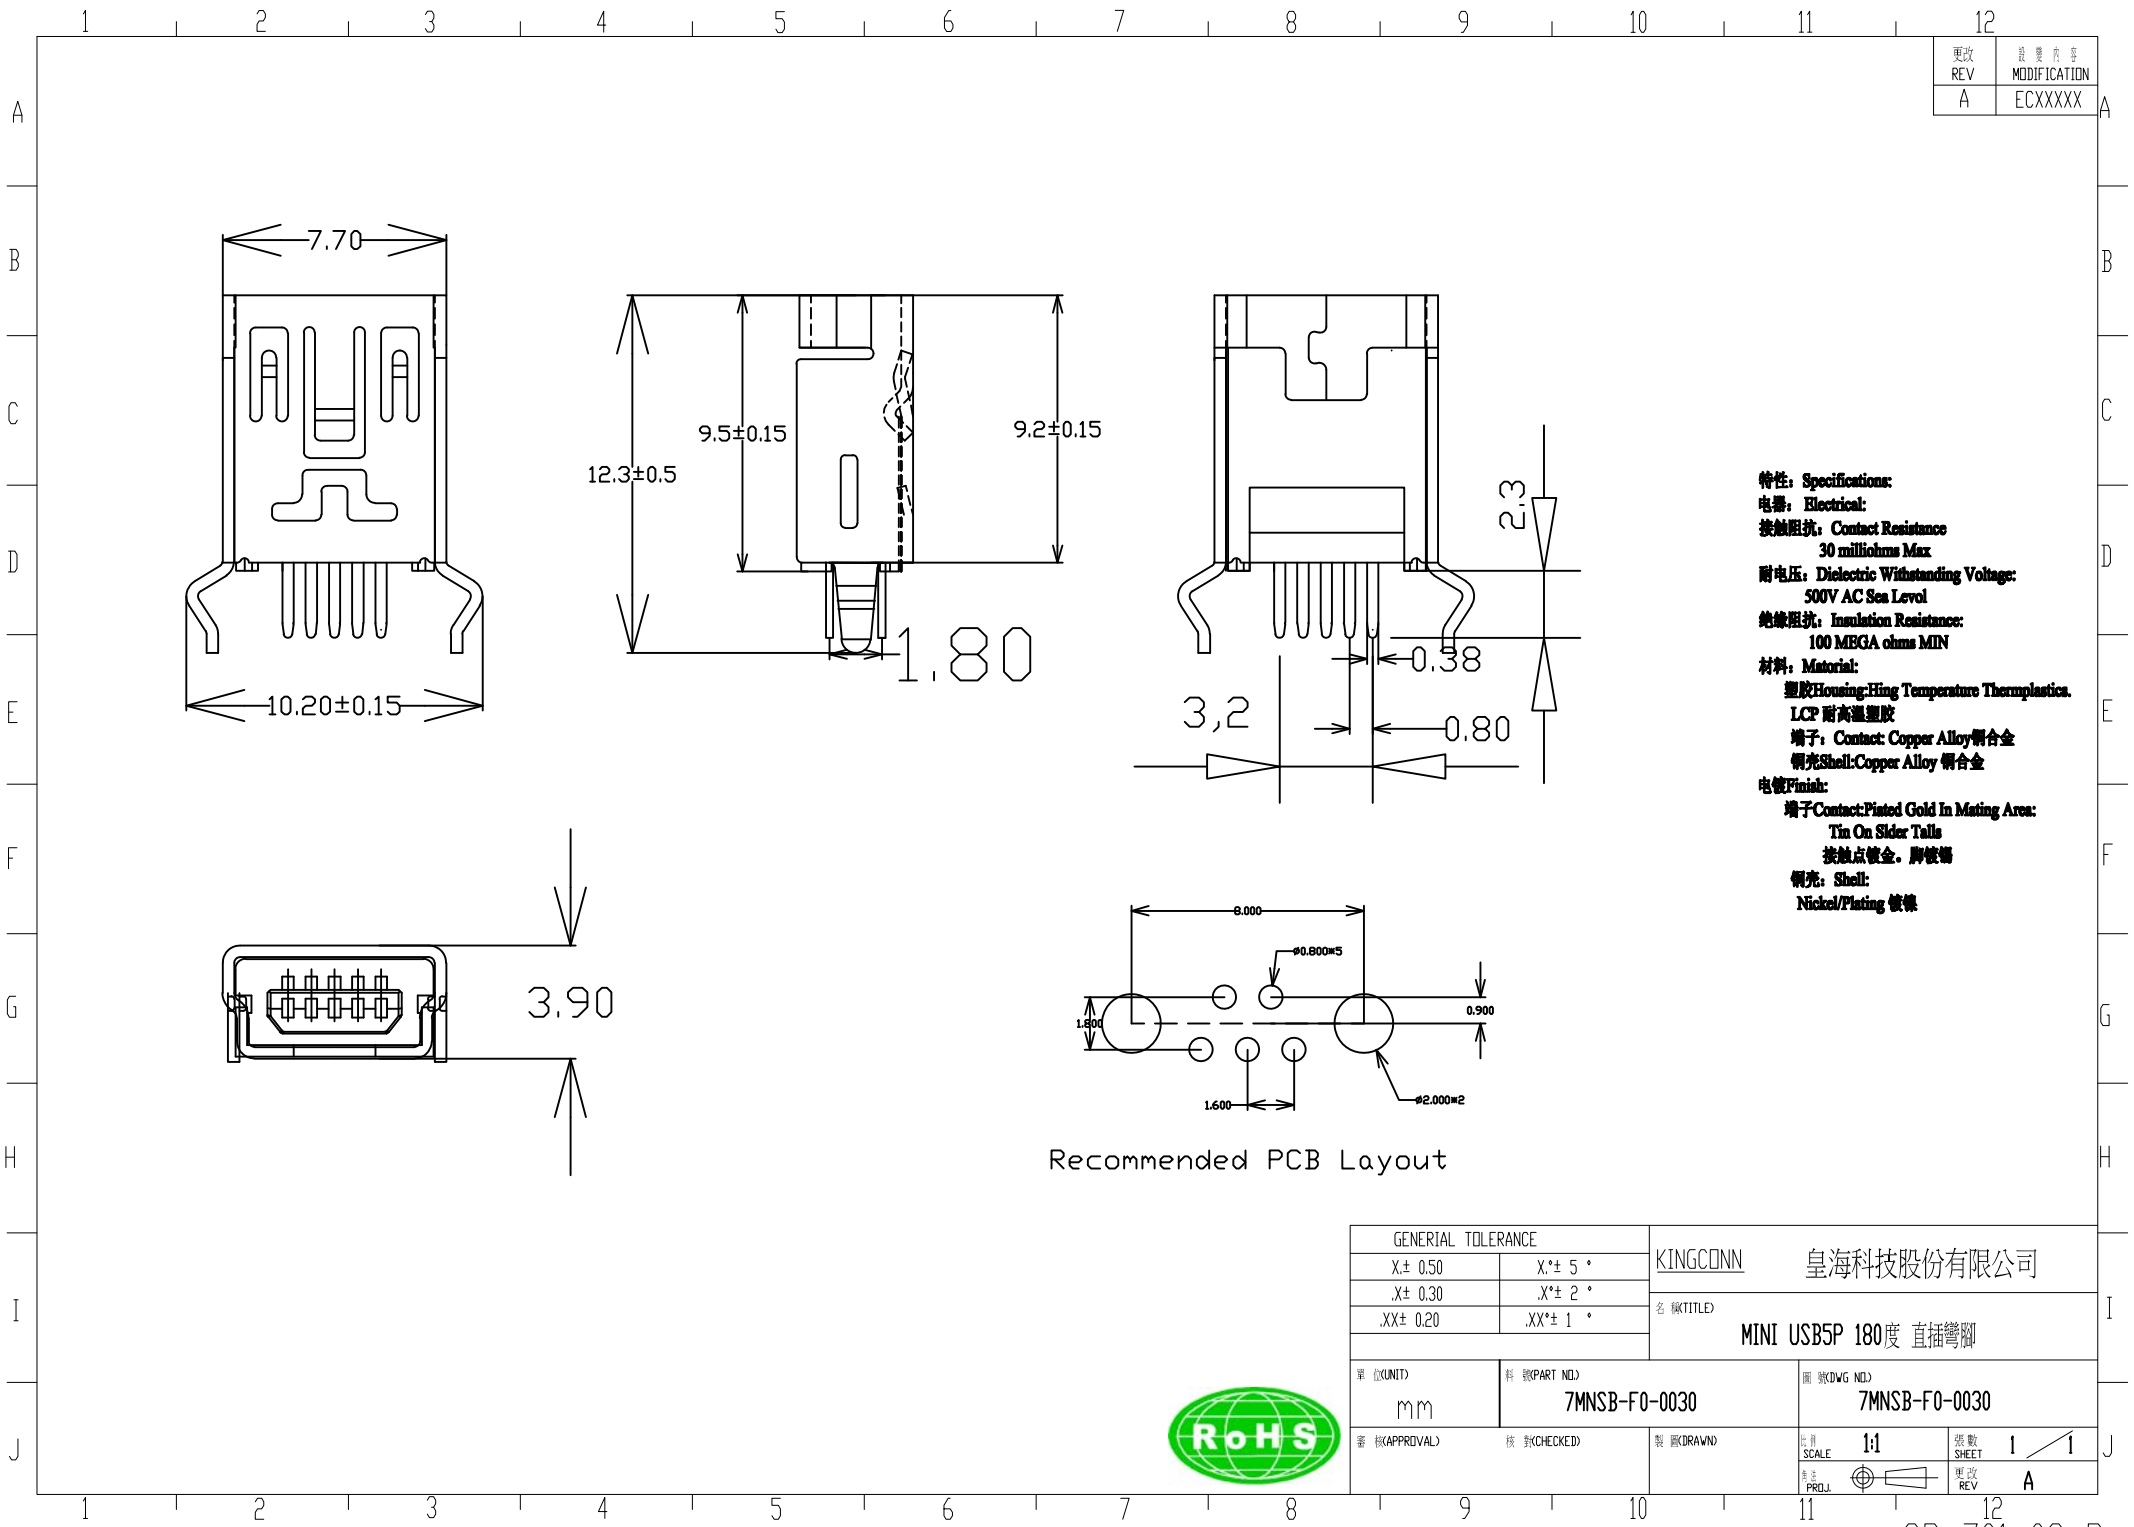