



REV	MODIFICATION
A	ECXXXXX

Recommended P.C.B Layout(Top Side)

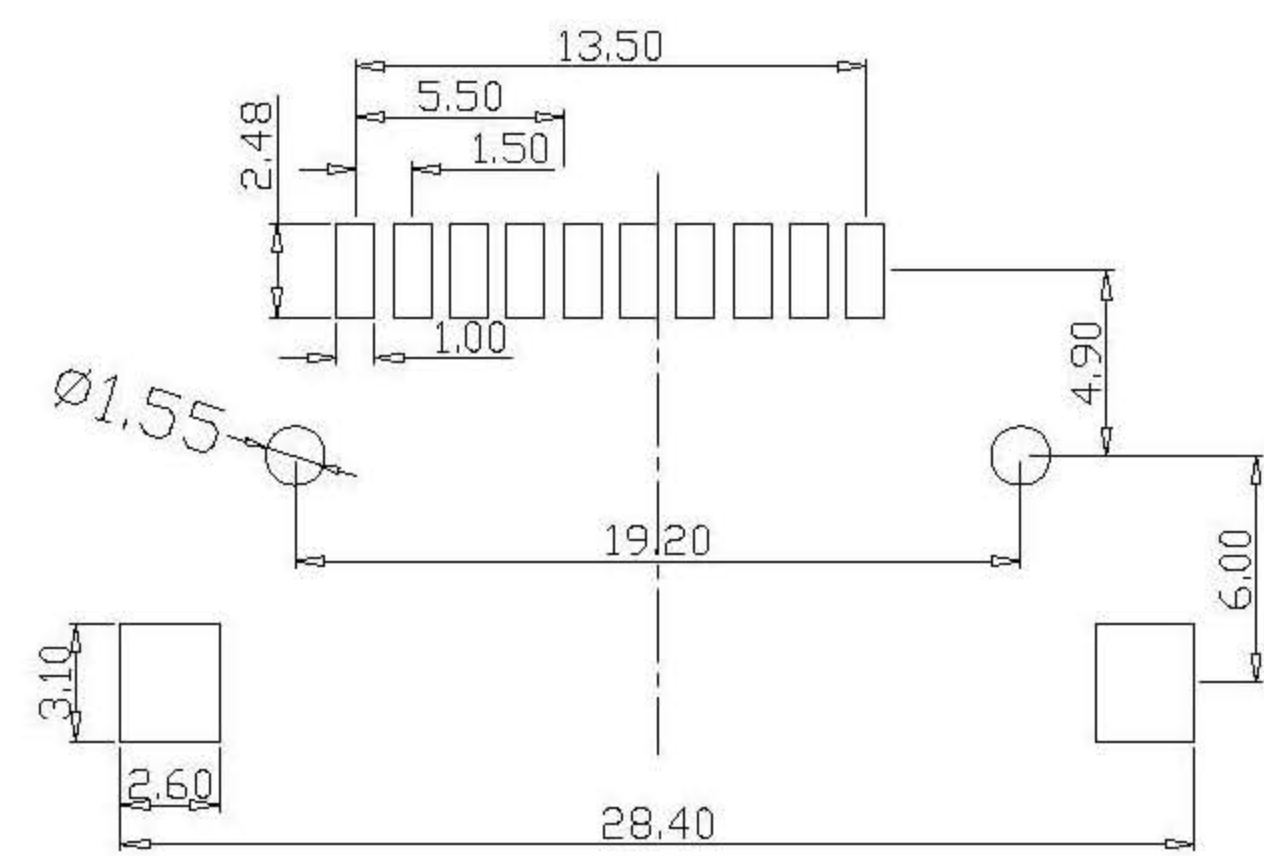

NOTES:
 Current Rating: 0.5A AC,DC
 Temperature Range: -20°C~+60°C
 Contact Resistance: 40mΩ max
 Insulation Resistance: 1000MΩ min
 Withstanding Voltage: 500V AC/minute
 Material: LCP UL 94V-0

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) MS 全塑短型92板下卡座	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT) mm	料 號(PART NO.) 7MSMS-FX-0017	圖 號(DWG NO.) 7MSMS-FX-0017	
審 核(APPROVAL)	檢 查(CHECKED)	繪 圖(DRAWN)	1/1 1/1 1/1 1/1

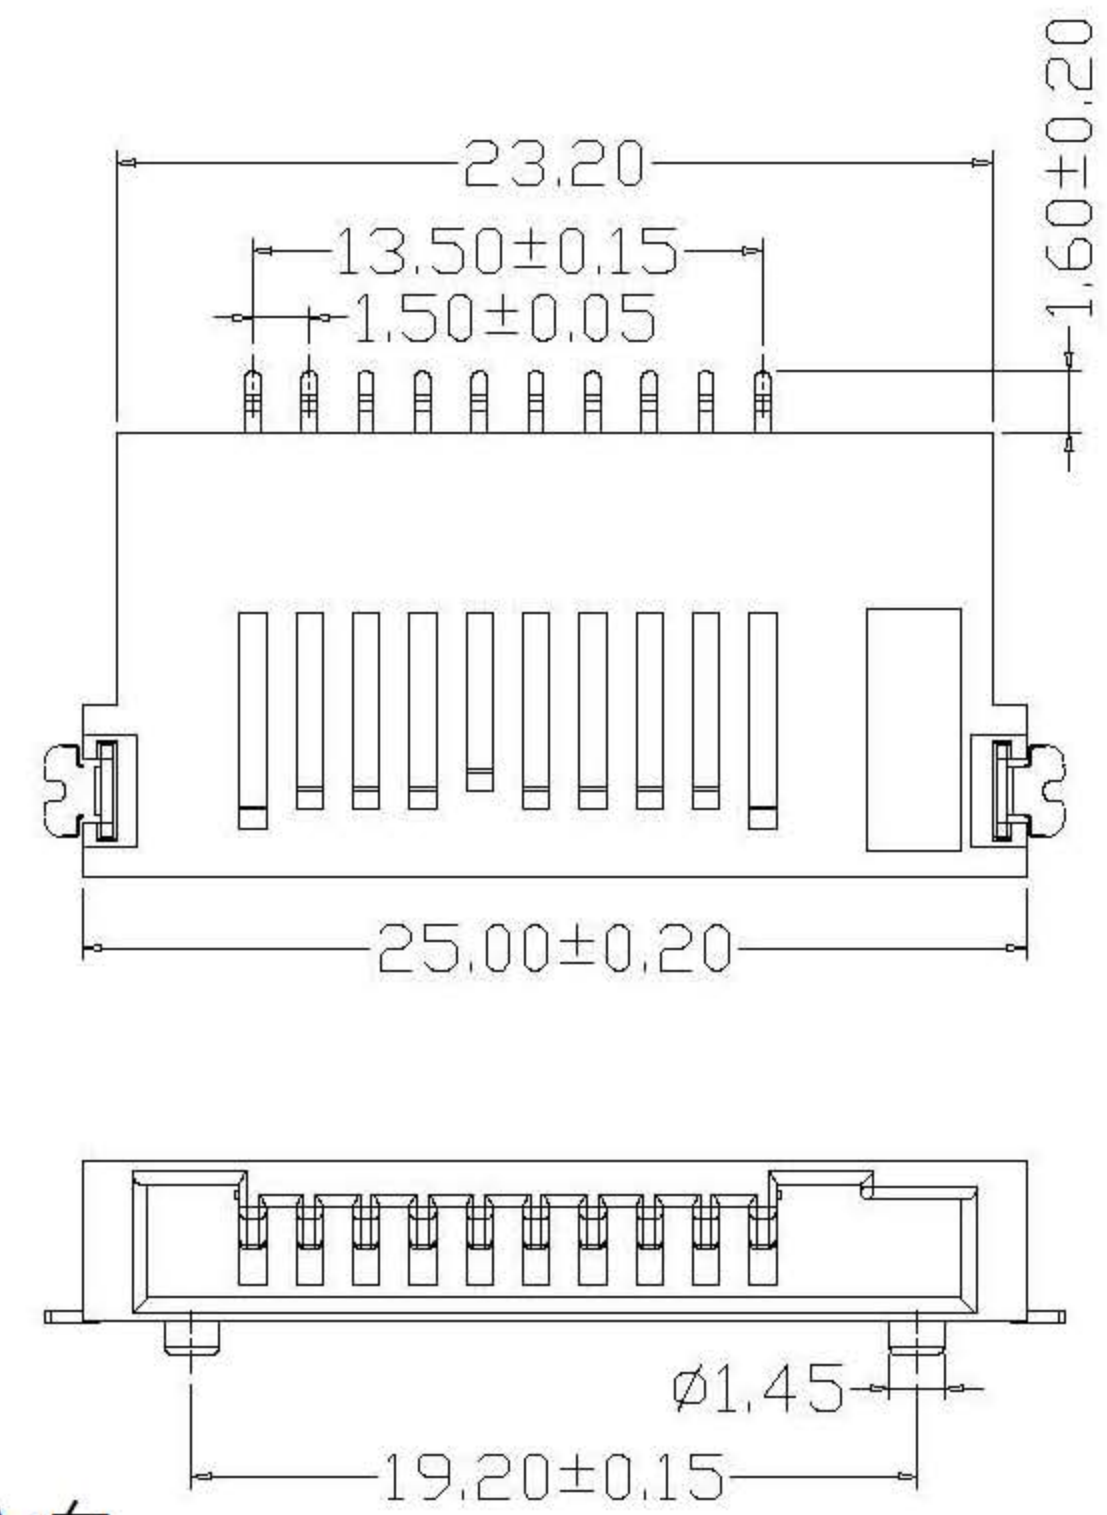

7MSMS-FX-0017

A:白
 O:黑