



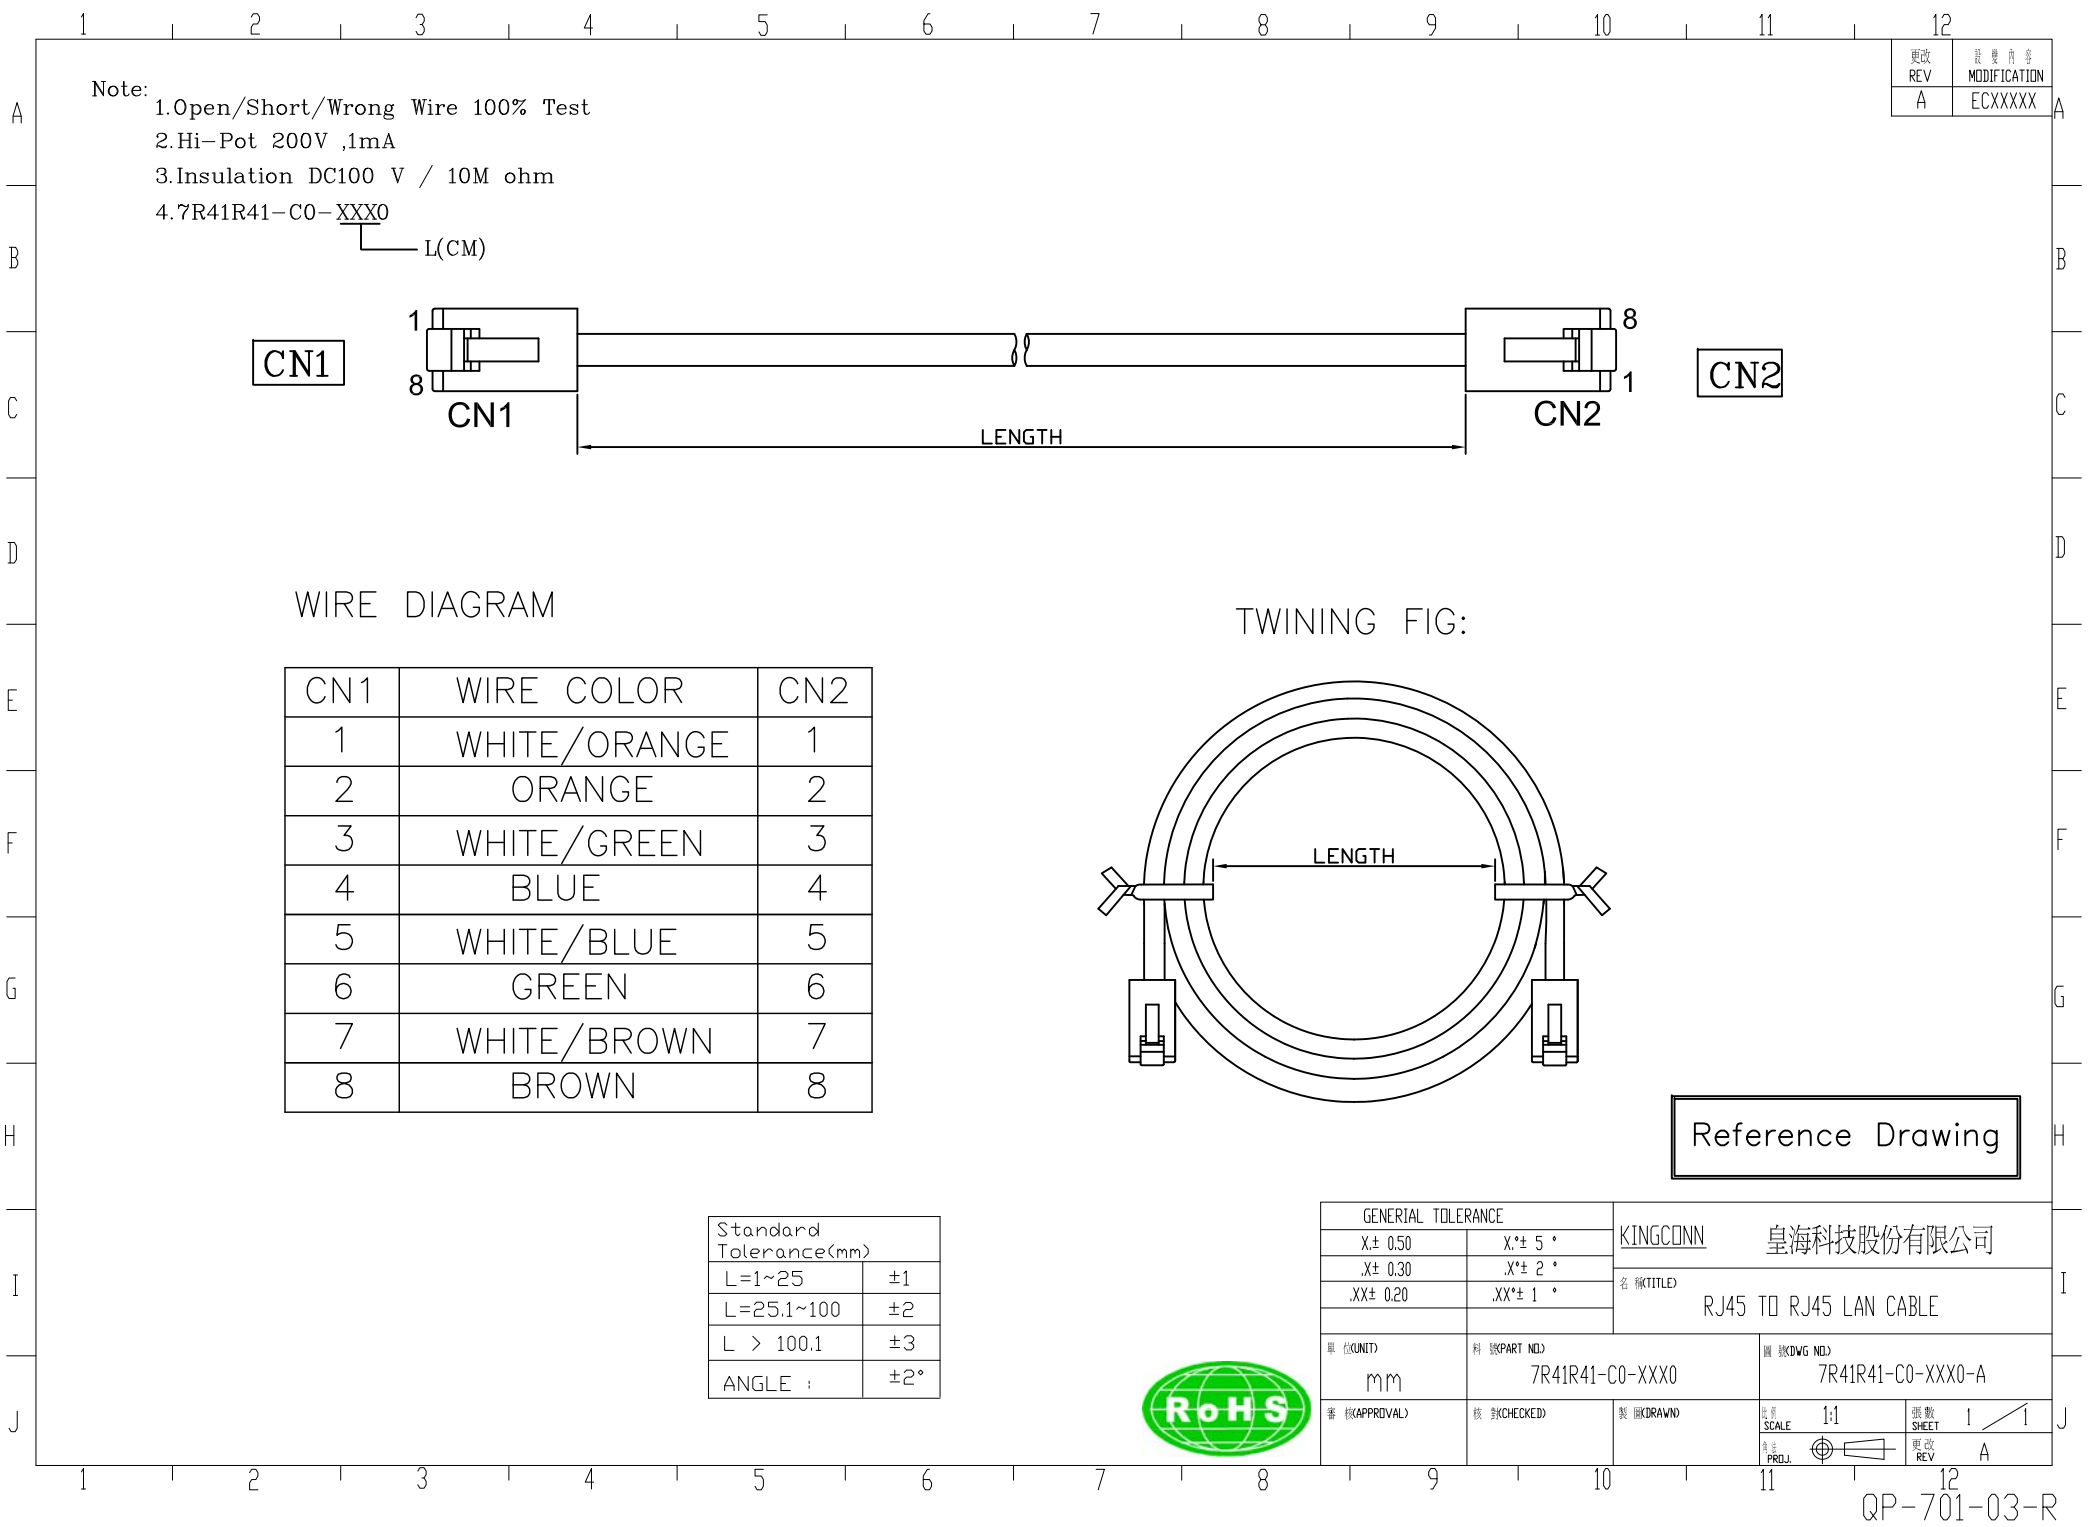

Note:

- 1.Open/Short/Wrong Wire 100% Test
- 2.Hi-Pot 200V ,1mA
- 3.Insulation DC100 V / 10M ohm
- 4.7R41R41-C0-XXX0


L(CM)

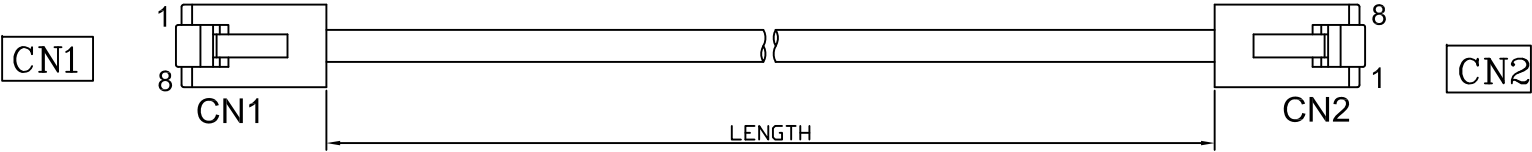

WIRE DIAGRAM

CN1	WIRE COLOR	CN2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
4	BLUE	4
5	WHITE/BLUE	5
6	GREEN	6
7	WHITE/BROWN	7
8	BROWN	8

TWINING FIG:

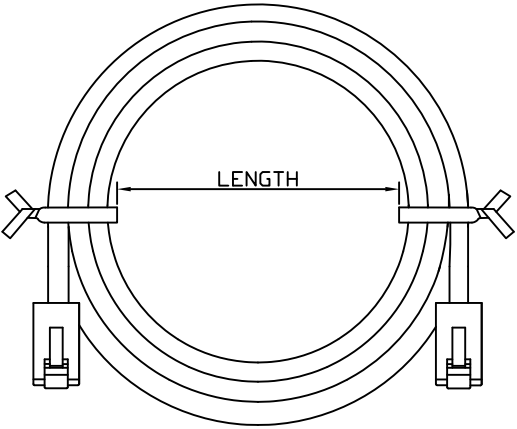

Reference Drawing

Standard Tolerance(mm)	
L=1~25	±1
L=25.1~100	±2
L > 100.1	±3
ANGLE :	±2°



GENERAL TOLERANCE		KINGCONN		皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) RJ45 TO RJ45 LAN CABLE			
.X± 0.30	.X*± 2 °				
.XX± 0.20	.XX*± 1 °				
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)			
mm	7R41R41-C0-XXX0	7R41R41-C0-XXX0-A			
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1	張 數 SHEET 1 / 1	
			更 改 REV A		