
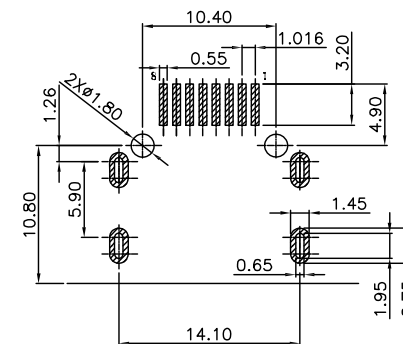
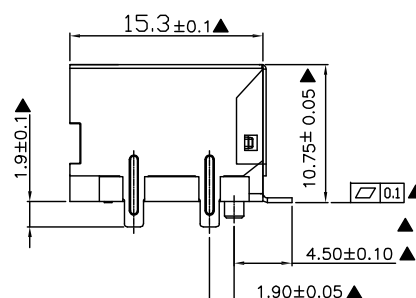


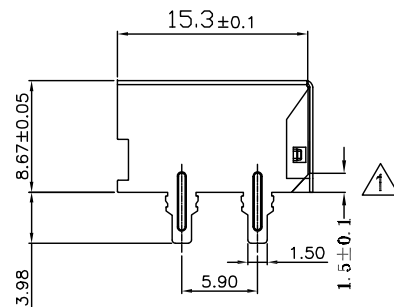


更改 REV	设计内容 MODIFICATION
A	ECXXXXX

SPECIFICATION NOTES:

- 1.MECHANICAL:
- 1.1. HOUSING:HIGH TEMPERATURE, THERMOPLASTIC, BLACK, UL 94V-0
 - 1.2.CONTACT:PHOSPHOR BRONZE THICKNESS=0.30mm.
 - 1.3.PLATING:FLASH GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 80U MIN. OVER ALL.
 - 1.4.SHELL:BRASS THICKNESS=0.20mm.
 - 1.5.OPERATING LIFE:750 CYCLES .

- 2.ENVIRONMENTAL:
- 2.1.STORAGE:0°C TO +70°C RELATIVE HUMIDITY<80%
 - 2.2.GUARANTEEE PERIOD:12 MONTHS
 - 2.3.OPERATION: -40°C TO +85°C
 - 2.4.IR TEMPERATURE: 255±5°C 5 SECONDS.



P.C.B 孔位参考图(±0.05)

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 称(TITLE)	RJ45 SMT
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 位(UNIT)	料 号(PART NO.)	图 号(DWG NO.)	
mm	7RJ45-F0-1101	7RJ45-F0-1101	
审 核(APPROVAL)	核 对(CHECKED)	製 图(DRAWN)	
		比 例 SCALE 1:1	张 数 SHEET 1/1
		图 号 PROJ. 1	更 改 REV A

