
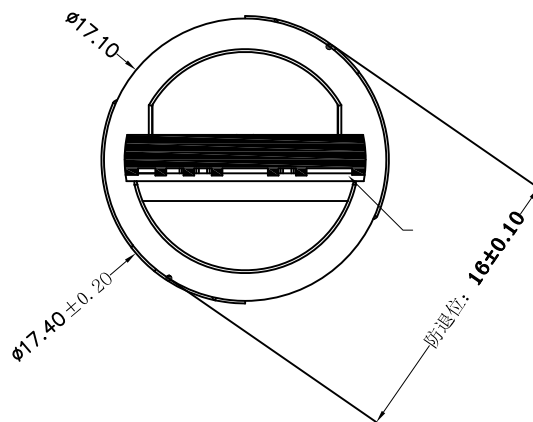
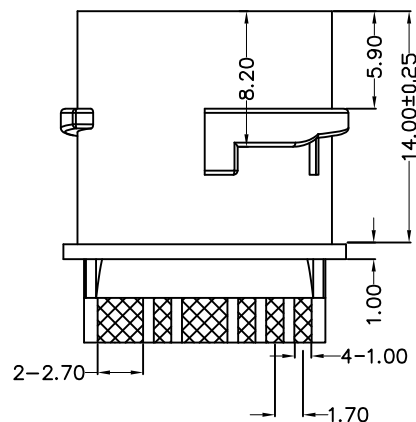
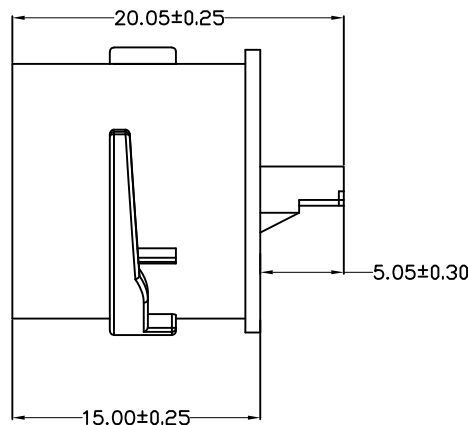


更改 REV	数量 MODIFICATION
A	ECXXXXX

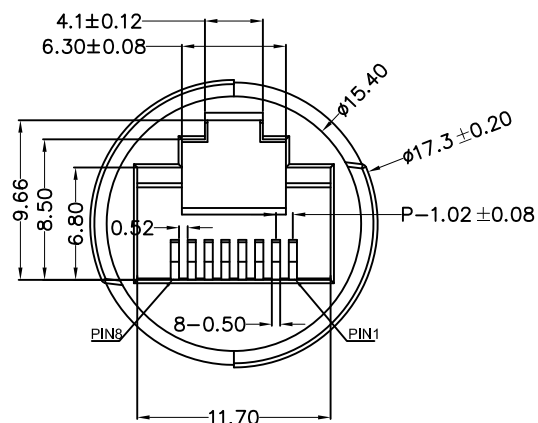

MATERIAL:

HOUSING: PBT+25%GF+LCP, HB ,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
1U" GOLD PLATING ON CONTACT AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT)	料號(PART NO.)	名義(TITLE)	
mm	7RJ45-F0-7001	RJ45 圓形防水IP67 母座	
審核(APPROVAL)	核對(CHECKED)	圖號(DWG NO.)	張數(SHEET)
		SCALE 1:1	1/1
		製圖(DRAWN)	更改(REV)
		PROJ.	A

