

ELECTRICAL SPECIFICATIONS@25°C UNLESS OTHERWISE NOTED:

1.Turn Ratio(+/-2%):1CT:1CT

2. Inductance OCL:

350uH Min @100KHz 0.1V DC BIAS 8mA

3.Insertion Loss:

-1.0dB Max @1.0-100MHz

4. Return Loss:

-20dB Min @1-30MHz

-16dB Min @30-60MHz

-12dB Min @60-80MHz

5. Cross talk:

-40dB Min @1-30MHz

-35dB Min @30-80MHz


6.Common Mode Rejection:

-35dB Min @1-100MHz

-20dB Min @50-150MHz

7.HIPOT TEST:1500Vrms 1mA.Max

SCHEMATICS:

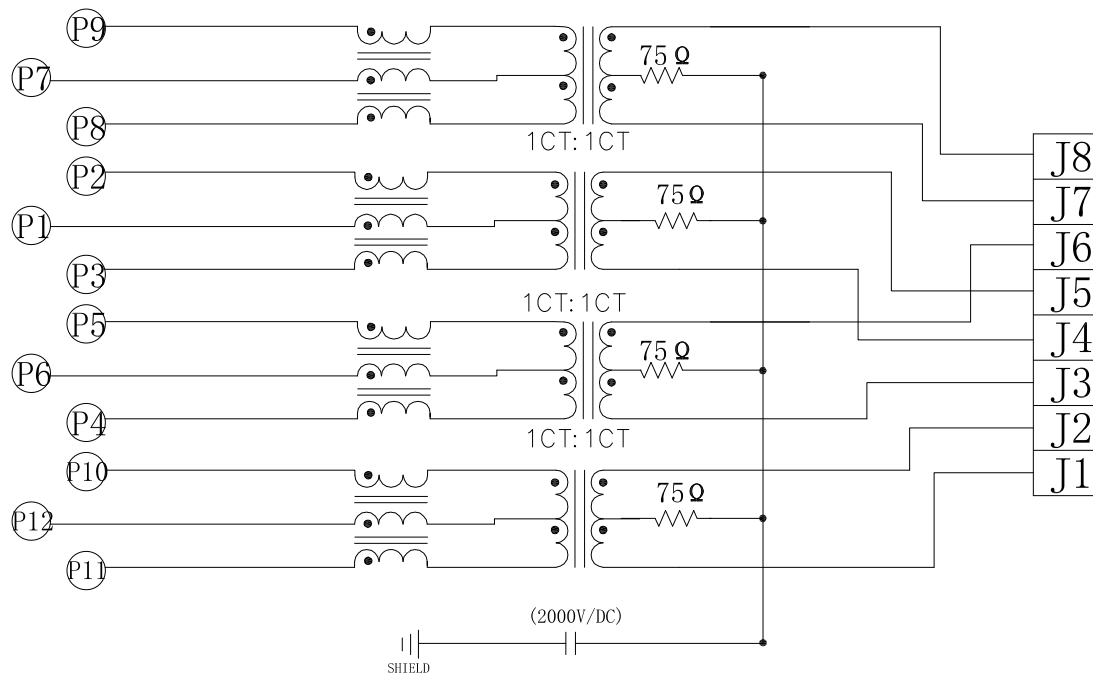

GENERAL TOLERANCE		KINGCONN	上海科技股份有限公司 名 稱(TITLE) RJ45+USB2.0 Connector With Transformer 1000Base Tab-UP 2x1 Port with LED	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
單位(UNIT)	料 號(PART NO)	圖 號(DWG NO)		
mm	7RJUS-F0-0008	7RJUS-F0-0008		
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1	張 數 SHEET 2/2
			第 次 REV PROJ	更 改 REV A

