


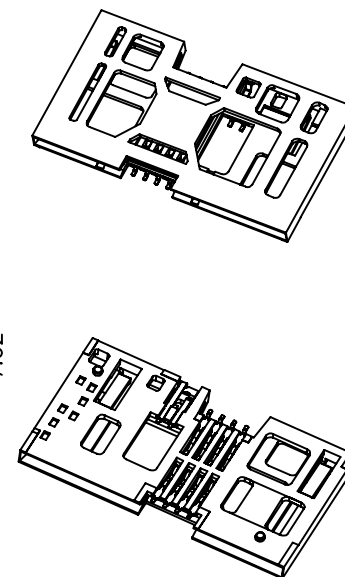

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 56.0LX31.1WX3.65H mm

Weight: Approx 4.15±0.5g

Durability: 100,000 cycles min.

2. Electrical Characteristics

Contact resistance: 50Ω typical, 100Ω max

Insulation resistance: >1000M Ω /500V DC

3.Solderability

Vapor phase: 215°C, 30sec. Max

IR reflow::260°C,10sec.Max

Manual soldering: 370°C, 3sec. Max

4.Environmental Characteristics

Operating temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

Operating humidity: 10%~+95%RH



GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司 名 (TITLE) SMART CARD CONNECTOR	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)		
mm	7SCCN-F0-0002	7SCCN-F0-0002		
審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比例 SCALE 1:1	張數 SHEET 1/1
			更改 REV 	A