


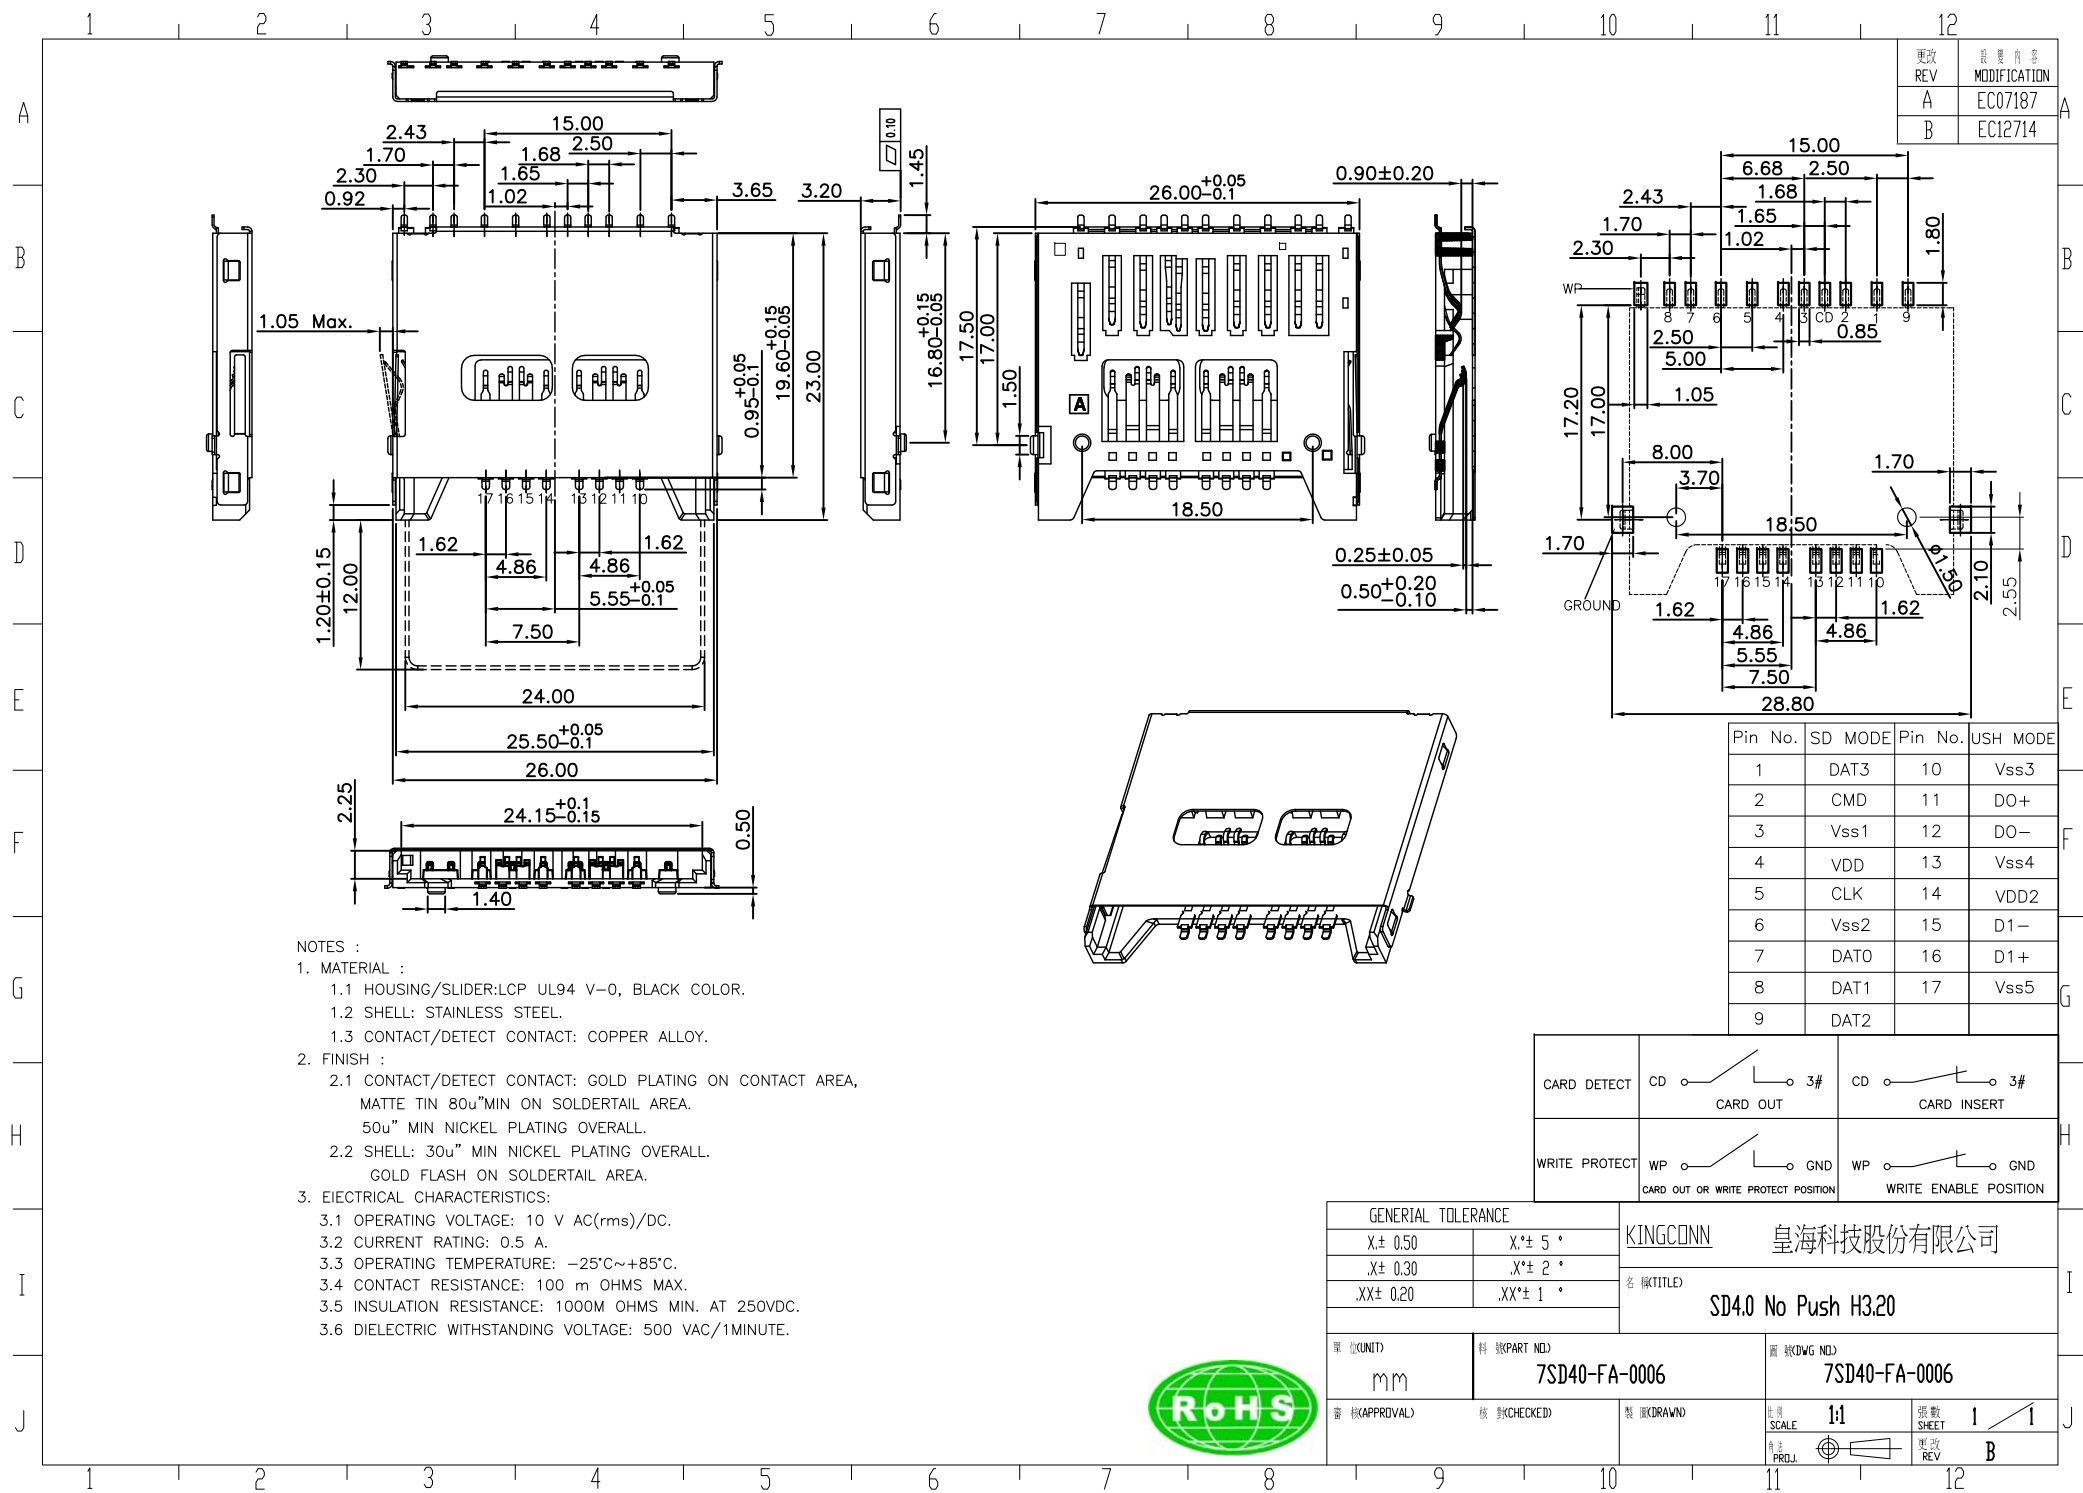

NOTES :

1. MATERIAL :

1.1 HOUSING/SLIDER:LCP UL94 V-0, BLACK COLOR.

1.2 SHELL: STAINLESS STEEL.

1.3 CONTACT/DETECT CONTACT: COPPER ALLOY.

2. FINISH :

2.1 CONTACT/DETECT CONTACT: GOLD PLATING ON CONTACT AREA,
MATTE TIN 80u"MIN ON SOLDERTAIL AREA.

50u" MIN NICKEL PLATING OVERALL.

2.2 SHELL: 30u" MIN NICKEL PLATING OVERALL.

GOLD FLASH ON SOLDERTAIL AREA.

3. ELECTRICAL CHARACTERISTICS:

3.1 OPERATING VOLTAGE: 10 V AC(rms)/DC.

3.2 CURRENT RATING: 0.5 A.

3.3 OPERATING TEMPERATURE: -25°C~+85°C.

3.4 CONTACT RESISTANCE: 100 m OHMS MAX.

3.5 INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.

3.6 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/1MINUTE.