

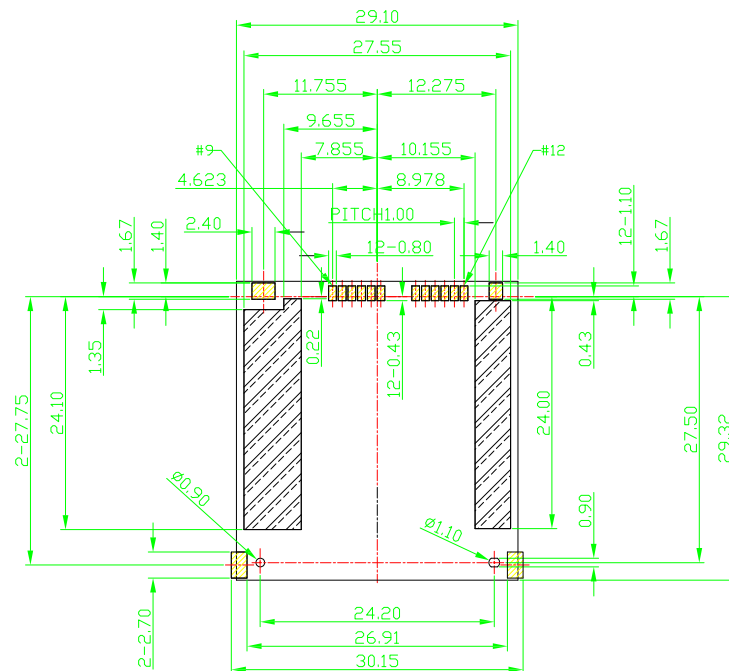
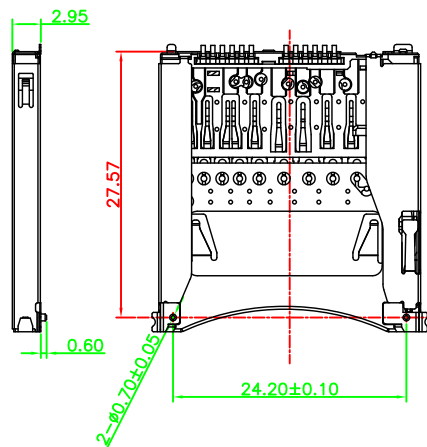


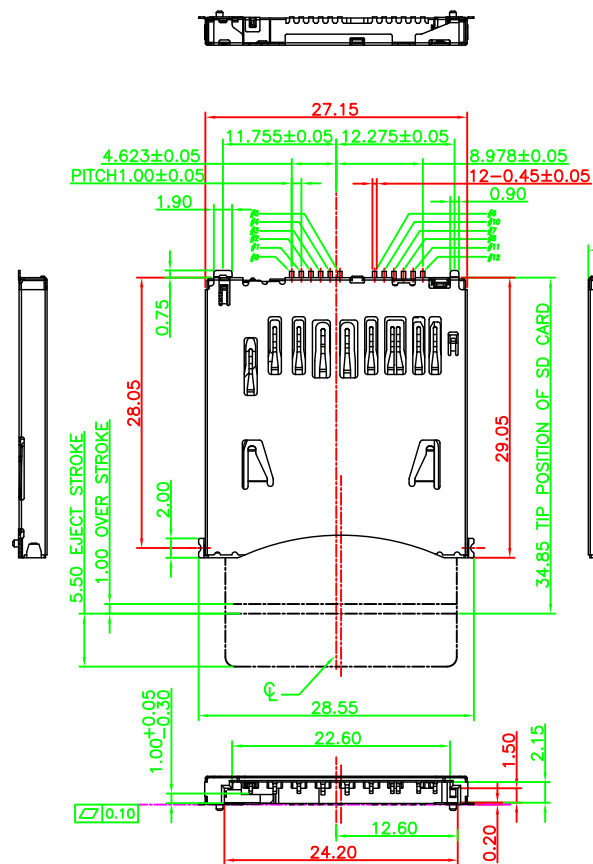

- NOTES :
1. MATERIAL :
 - 1.1 HOUSING:LCP S475 UL94 V-0, BLACK COLOR.
 - 1.2 SHELL:STAINLESS STEEL SUS.
 - 1.3 CONTACT:COPPER ALLOY.
 2. FINISH :
 - 2.1 CONTACT: GOLD PLATING ON CONTACT AREA,
MATTE TIN 80u"MIN ON SOLDERTAIL AREA.
50u" MIN NICKEL PLATING OVERALL.
 - 2.2 SHELL: 30U" MIN SOLDERABLE NICKEL PLATED OVER ALL.
AU 1U" PLATING ON SOLDERTAIL.
 3. ELECTRICAL CHARACTERISTICS:
 - 3.1 OPERATING VOLTAGE : 100V AC(rms)/DC.
 - 3.2 CURRENT RATING : 0.5 A.
 - 3.3 OPERATING TEMPERATURE: -25°C~+85°C.
 - 3.4 CONTACT RESISTANCE: 100 m OHMS MAX.
 - 3.5 INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
 - 3.6 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC 1/MINUTE.



NO.	Name	Discription
1	CD/DAT3	Card Detect /Data Line
2	CMD	Command / Response
3	VSS1	Supply voltage ground
4	VDD	Supply voltage
5	CLK	Clock
6	VSS2	Supply voltage ground
7	DAT0	Data Line
8	DAT1	Data Line
9	DAT2	Data Line

GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
		名 稱(TITLE)	SD CONN REVERSE H:2.95mm	
單 位(UNIT)	料 號(PART NO)	圖 號(DWG NO)		
mm	7SDCN-F0-0033	7SDCN-F0-0033		
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 尺 SCALE 1:1	張 數 SHEET 1/1
			檢 查 PROJL 	更 改 REV A

