


更改 REV	變更內容 MODIFICATION
A	ECN04003
B	ECN04007
C	ECN04208
D	ECN04211
E	ECN04224

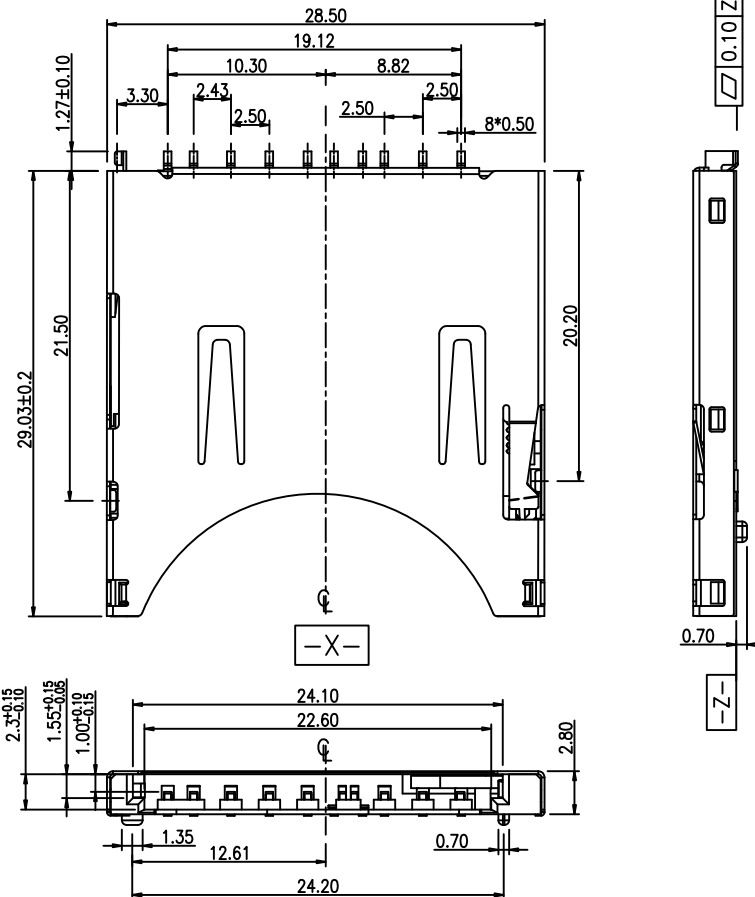

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0.

Contact: Copper Alloy

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :12V AC/DC

Ambient Temperature Range :-20°C~+60°C

Storage Temperature Range :-40°C~+70°C


Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100mΩ max.

Insulation Resistance:1000M min./500VDC

Mating Cycles:5,000 Insertions

Usable Memory Card: SD&MMC Card

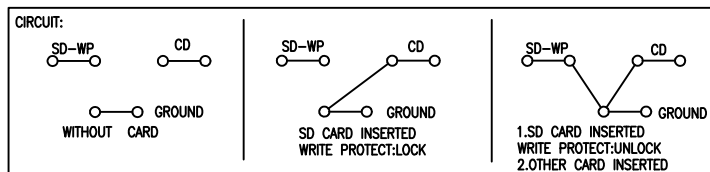

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 *	名 (TITLE) SD PUSH 雙彈片卡座	
X± 0.30	X*± 2 *		
.XX± 0.20	.XX*± 1 *		
單 (UNIT) mm	料 (PART NO.) 7SDCN-FA-0010	圖 (DWG NO.) 7SDCN-FA-0010	
審 (APPROVAL)	核 (CHECKED)	製 (DRAWN)	比例 SCALE 1:1
			張數 SHEET 1 / 2
			更改 REV E

A
—
B
—
C
—
D
—
E
—
F
—
G
—
H
—
I
—
J

H
—
I

 prohibited layout area

