

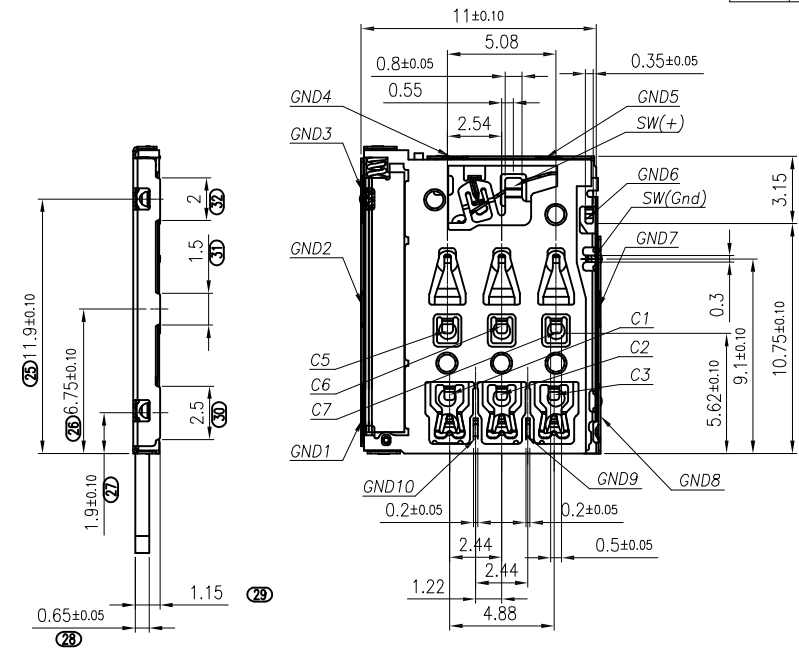
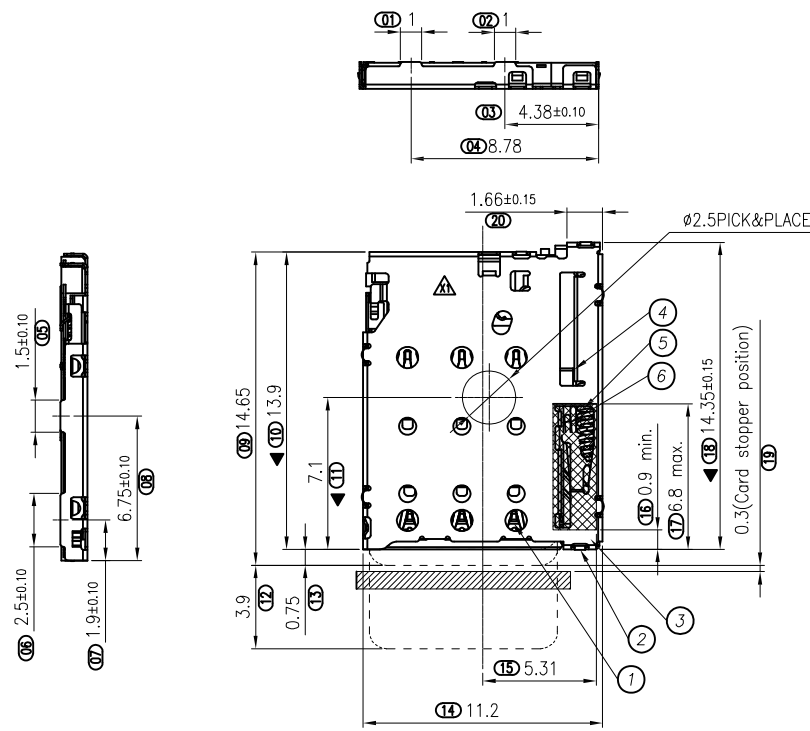


更改 REV	修改内容 MODIFICATION
A	ECXXXX



NOTES:


- MATERIAL:
 - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal: Copper Alloy.
 - Shell: Stainless Steel.
- SPECIALITY:
 - Rated current: 0.5A
 - Rated voltage: 30V
 - Contact Resistance: 100mΩ MAX
 - Insulation Resistance: 100MΩ MIN 500V DC
 - Dielectric withstanding voltage: 100V AC.
 - Solder ability: 255±5°C, 10±0.5s.
 - Durability: 5000 Cycles Min.
 - Insertion Force: 10N MAX
 - Withdrawal Force: 0.5N MIN
 - Operating condition: Temperature -40°C ~ +85°C; Humidity 80% R.H MAX
- PLEASE CONTACT JBL SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY



SIM Card Pin Assignments

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

D/SW CIRCUIT



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 (TITLE) NAND SIM 6PIN H:1.25mm	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位 (UNIT) mm	料號 (PART NO.) 7SIMC-F0-0014	圖號 (DWG NO.) 7SIMC-F0-0014	比例 (SCALE) 1:1
審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	張數 (SHEET) 1 / 2
			更改 (REV) A



