

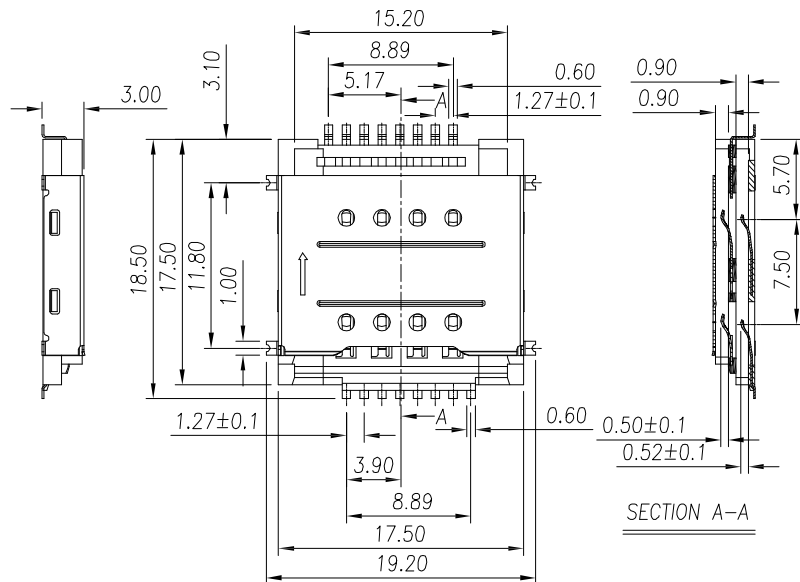
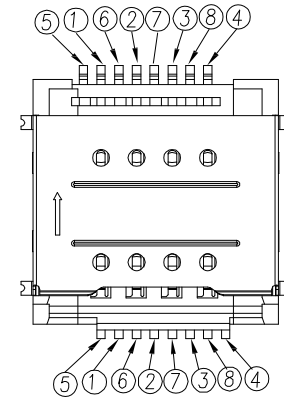


更改 REV	變更內容 MODIFICATION
A	ECXXXX

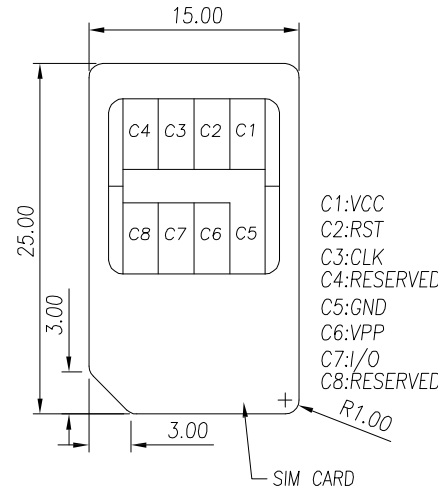

SECTION A-A



NOTES:

1. MATERIAL:


- 1-1. HOUSING: THERMOPLASTIC 94V-0, COLOR: BLACK
- 1-2. CONTACT: COPPER ALLOY T=0.15MM
- 1-3. SHELL: STAINLESS STEEL T=0.15MM

2. FINISH:


- 2-1. CONTACT: Au PLATING ON CONTACT 1μ" OR 100μ" MATTE Sn PLATING ON SOLDER TAILS 80-120μ" NICKEL UNDERPLATING OVER ALL
- 2-2. SHELL: G/F PLATING ON SOLDER TAILS 50μ" MIN. NICKEL UNDERPLATING OVER ALL

3. SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 30V AC
- 3-2. CURRENT RATING: 0.5A MAX
- 3-3. INSULATION RESISTANCE: 100MEG. OHM MIN
- 3-4. CONTACT RESISTANCE: 40 MILL. OHM MAX
- 3-5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE
- 3-6. OPERATION TEMPERATURE: -40° ~ +80°
- 3-7. DURABILITY: 3000 CYCLES
- 3-8. NORMAL FORCE: 30~70gf AT THE WORKING POSITION

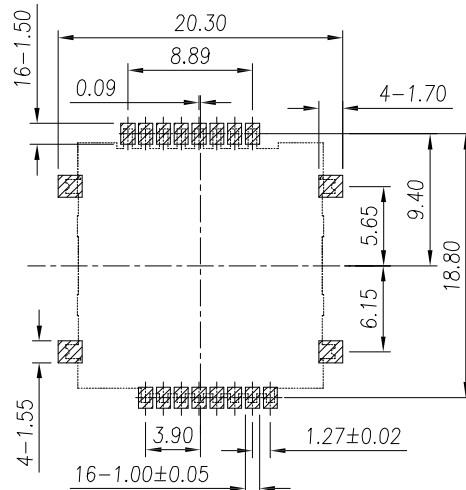

RECOMMENDED P.C.B LAYOUT
GENERAL TOLERANCE ± 0.05

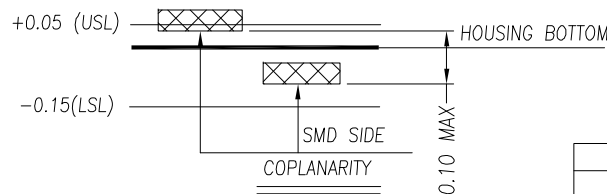

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名 稱(TITLE) 雙層SIM卡座3.0H	
X± 0.30	X*± 2°		
XX± 0.20	XX*± 1°		
單位(UNIT) mm	料 號(PART NO) 7SIMC-FA-0003-A	圖 號(DWG NO) 7SIMC-FA-0003-A	
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比例 SCALE 1:1 圖 數 SHEET 1 / 1 更 改 REV A