



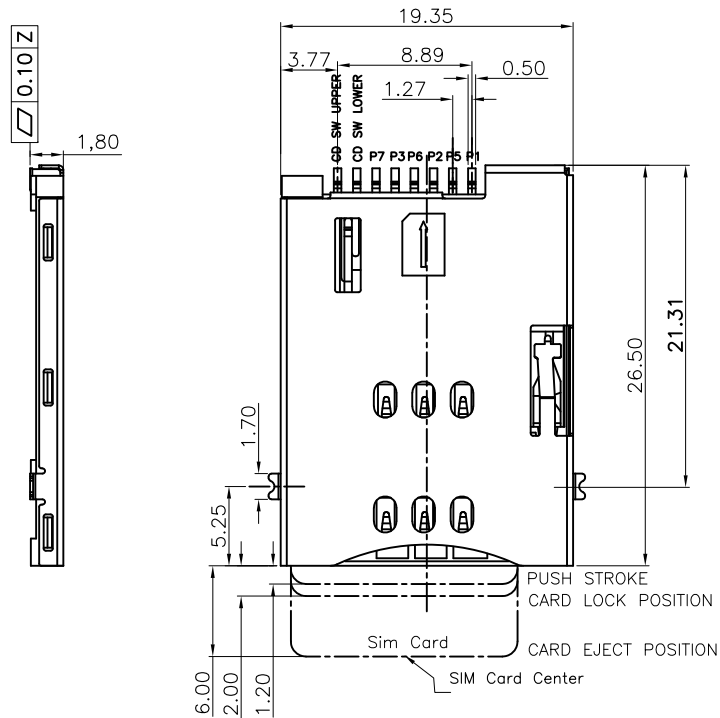


Specification:

- *Electrical Characteristics:
 - Current Rating:0.5A.
 - Withstanding Voltage:AC500V r.m.s.
 - Insulation Resistance:1000Megohms Minimum at DC 500V
 - Contact Resistance:100Miliohms Maximum.
- *Mechanical Characteristics:
 - Mating Cycles:5000 Insertions.
- *Environmental:
 - Operating Temperature:−40°To+85°
- *Material:
 - 1.Housing:HI-Temp plastic UL 94V-0 Rated.
 - 2.Contact:Copper Alloy.
 - 3.Shell:SUS.

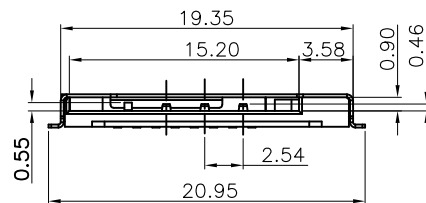

CONNECTOR TERMINAL NO	PIN NO
PIN 1	VCC:PWR SIGNAL AND GND
PIN 2	RST:RESET SIGNAL
PIN 3	CLK:CLOCKING SIGNAL
PIN 5	GND:PWR SIGNAL AND GND
PIN 6	VPP:PROGRAMMING VOLTAGE
PIN 7	I/O:SERIAL DATA INPUT/OUTPUT

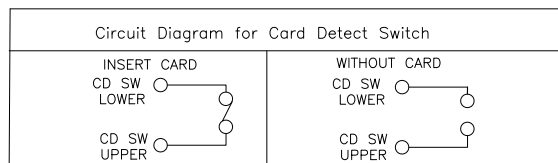

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °	名称(TITLE) SIM CARD PUSH PUSH (6+2PIN) H=1.8mm	
单位(UNIT)	料号(PART NO.)	图号(DWG NO.)	
mm	7SIMC-FA-0006	7SIMC-FA-0006	
审核(CHECKED)	审核(CHECKED)	制图(DRAWN)	比例(SCALE) 1:1
			张数(SHEET) 1/1
			更改(REV) A