
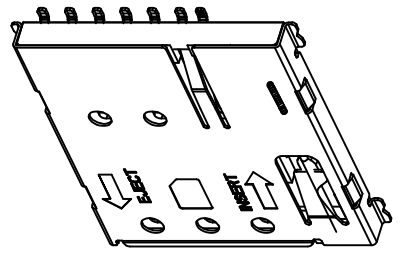


更改 REV	数量 MODIFICATION
A	ECXXXX

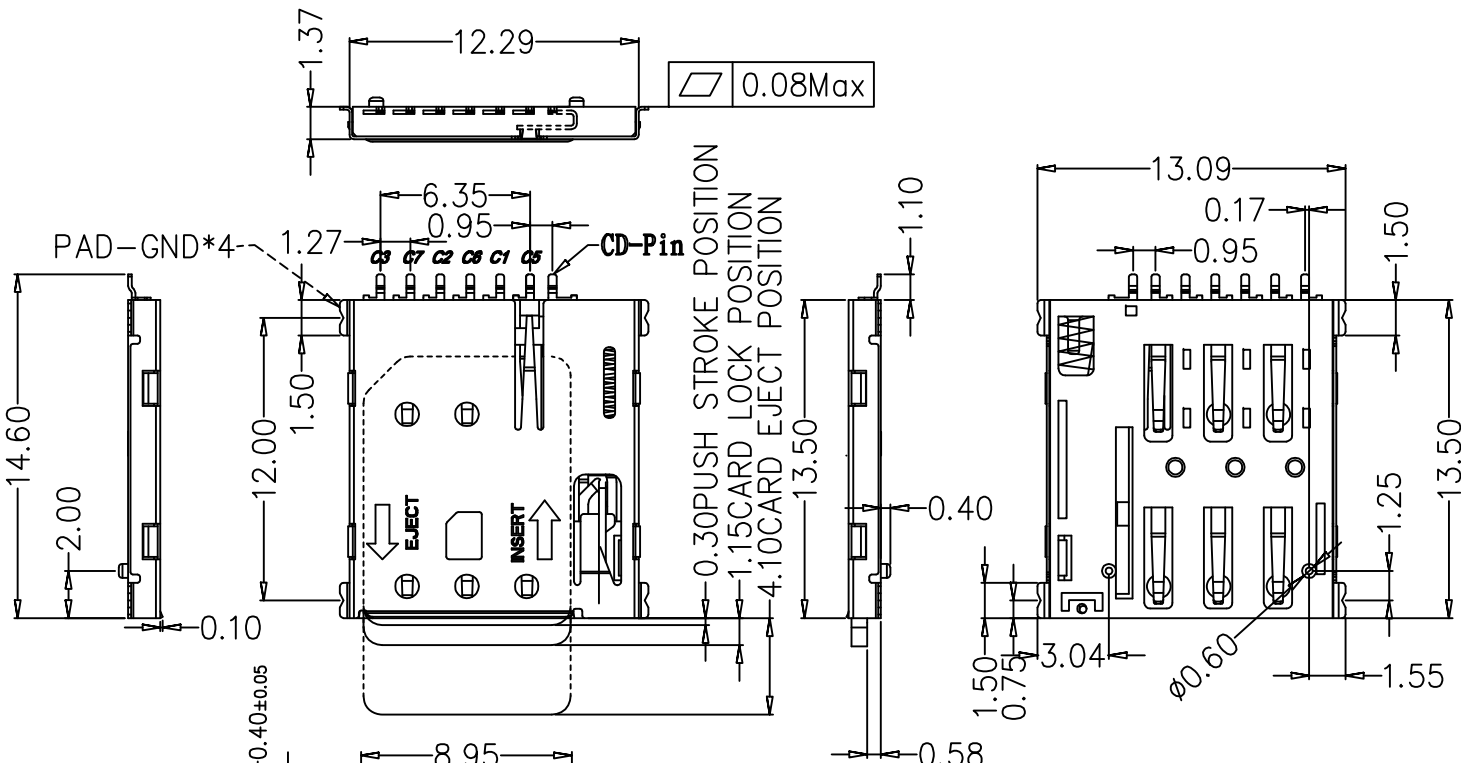




Specification

MATERIAL:
 Insulator: High Temperature Thermoplastic UL 94V-0.
 Contact: Copper Alloy
 SHELL: SUS

PLATING:
 Contact: ALL AU GOLD 1U
 Shell: Plated 50u" Ni Overall, PAD Au 1U

Electrical:
 Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C~+80° C
 Storage Temperature Range :-40° C~+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m Ω max.
 Insulation Resistance:1000M Ω min./500VDC
 Mating Cycles:3000 Insertions
 產品耐溫度:260度

SIM pin assignment	
PIN#	Name
C1	VCC 供電電壓
C2	RST 重置
C3	CLK 時鐘
C5	GND 接地
C6	VPP 程序電壓
C7	I/O 輸入輸出

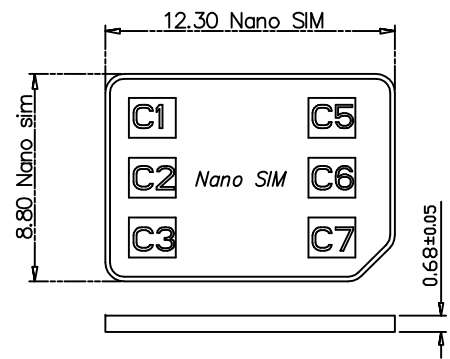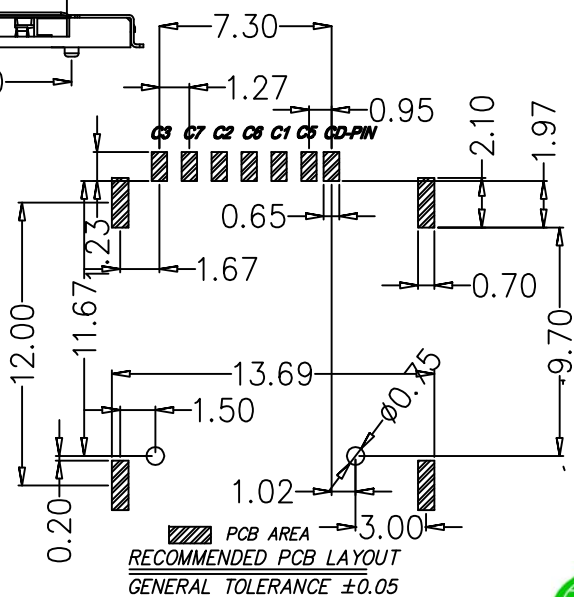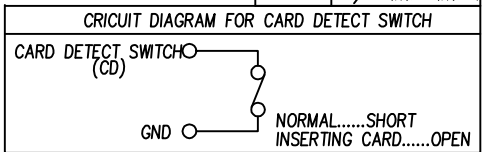

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5°	名 (TITLE) SIM 卡座 PUSH/PUSH 1.35H 帶 CD PIN	
X± 0.30	X*± 2°		
.XX± 0.20	.XX*± 1°		
單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	張數 (SHEET)
mm	7SIMC-FA-0021	7SIMC-FA-0021	1/1
審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比例 (SCALE) 1:1
			更改 (REV) A