

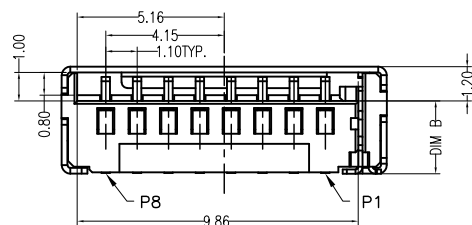
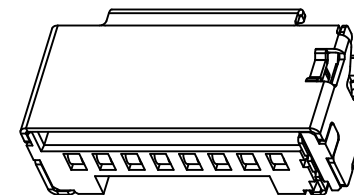


更改 REV	数量 MODIFICATION
A	ECXXXXX

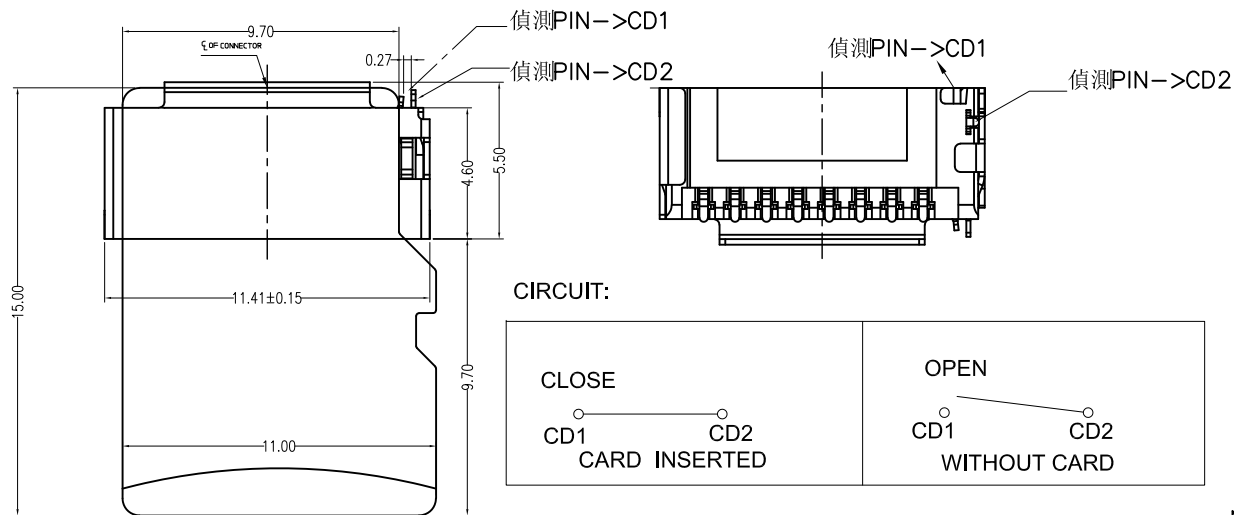

NOTES

1.Electrical:

Contact resistance:50m ohms max.
Dielectric withstanding voltage:500V RMS.
Insulation resistance:1000M ohms min.

2.Mechanical:

MATE AND UNMATE FORCE:
MATE FORCE:4.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:1500cycles MIN.

3.Environment:

Operating Temperature:-25*to+85*.


4.FINISH:

TERMINAL: GOLD Plated Over NICKEL
Contact area,TIN ON
SOLDER TAIL AREA& TIN
Plated ALL Over NICKEL.

Shell: SPCC WITH NICKEL&GOLD Plated.

5.COLOR:

HOUSING:BLACK.

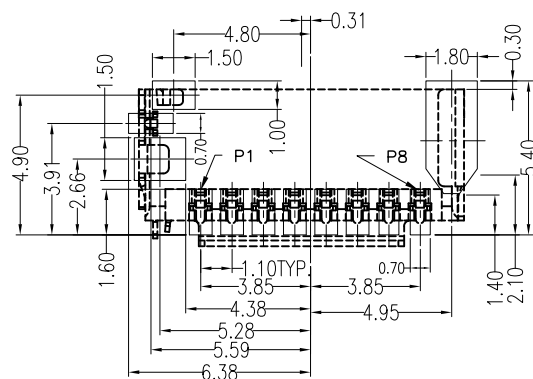

RECOMMENDED PCB LAYOUT
TOLERANCES ±0.05

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

序號	DIM A	DIM B	料號
1	3.0	1.86	7TFCN-FA-1010-A
2	3.35	2.16	7TFCN-FA-1010-B
3	3.75	2.56	7TFCN-FA-1010-C



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) TF 短體 帶檢測 PIN	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT) mm	料號(PART NO.) 7TFCN-FA-1010-X	圖 號(DWG NO.) 7TFCN-FA-1010-X	
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比例 SCALE 1:1 圖 號 PROJ. 1 張數 SHEET 1 / 1 更改 REV A