


更改	REV	更改	MODIFICATION
A		ECXXXXX	

- Note:
- 1.Open/Short/Wrong Wire 100% Test
 - 2.Hi-Pot 200V ,1mA
 - 3.Insulation DC100 V / 10M ohm
 - 4.7U31U31-C6-XXX0

L(CM)

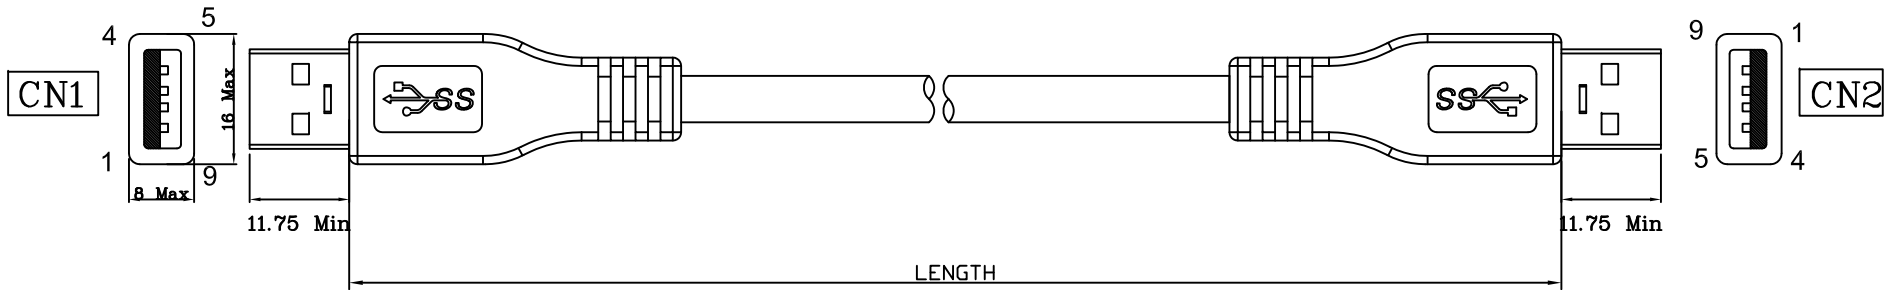

WIRE DIAGRAM

Material Name	COLOR	RED	WHITE	GREEN	BLACK	BLUE	YELLOW	GND	GND	VIOLET	ORANGE	BRAID
USB A 3.0	CN1	1	2	3	4	5	6	7	8	9		SHELL
USB A 3.0	CN2	1	2	3	4	8	9	7	5	6		SHELL

Reference Drawing

Standard Tolerance(mm)	
L=1~25	±1
L=25.1~100	±2
L > 100.1	±3
ANGLE :	±2°



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) USB 3.0 A TO A CABLE	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT)	科 號(PART NO.)	圖 號(DWG NO.)	
mm	7U31U31-C6-XXX0	7U31U31-C6-XXX0-A	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1 張 數 SHEET 1 / 1
			更 改 REV A