
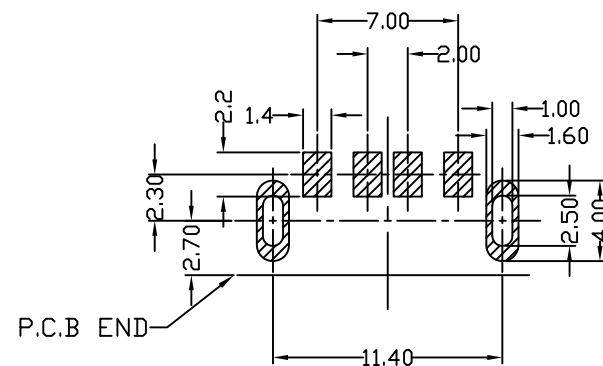

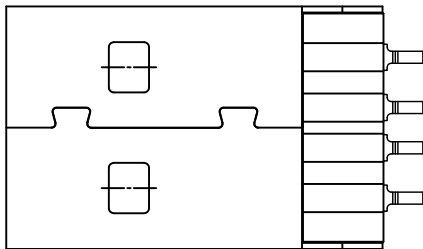


更改 REV	變更內容 MODIFICATION
A	ECXXXXX

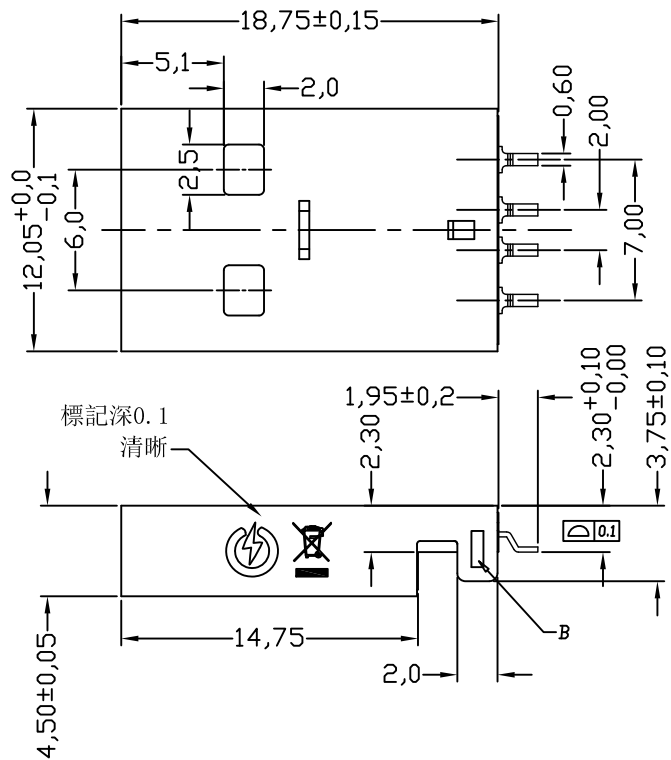

Recommend P.C.B Layout

Specifications:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 1.3 Contact resistance: 30mΩ Max.
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Temperature range: -45℃~+85℃.

GENERAL TOLERANCE		KINGCONN	皇海科技股份有限公司	
X± 0.50	X*± 5 °			
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
		名 稱(TITLE)	USB AM 沉板 無柱	
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG. NO.)		
mm	7USB2-F0-0015	7USB2-F0-0015-A		
審 核(APPROVAL)	檢 製(CHECKED)	製 圖(DRAWN)	比 例 SCALE	張 數 SHEET
			1:1	1 / 1
			 PROJ.	更改 REV A

