
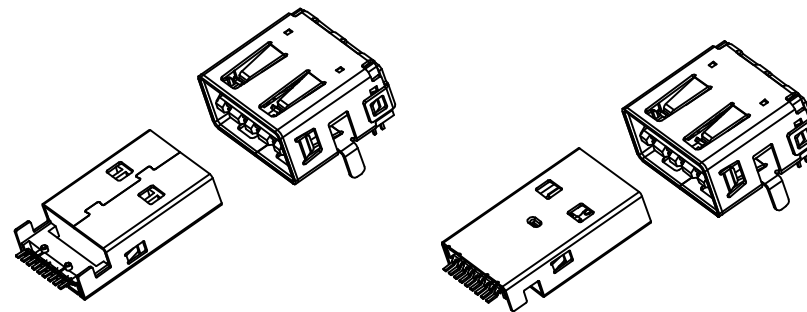





NOTES:

1.MATERIAL:

1.1 HOUSING: THERMOPLASTIC COLOR: BLACK

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: STAINLESS STEEL OR K7

2. PLATING;




CONTACT:

1. GOLD FLASH CONTACT AREA;120u" TIN SOLDER;NICKEL OVER A SHELL: NICKEL OVER ALL


3.ENVIRONMENTAL:

OPERATION TEMPERATURE: -40°C~+85°C

4.PRODUCT COMPLIANT TO THE REQUEST OF RoHS

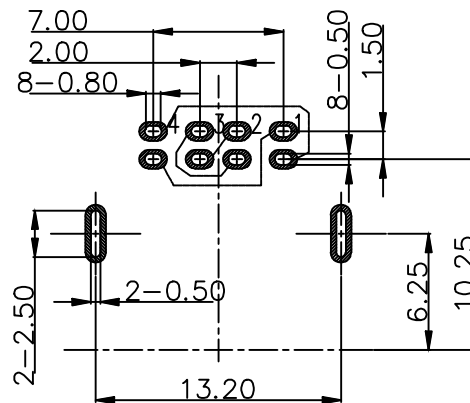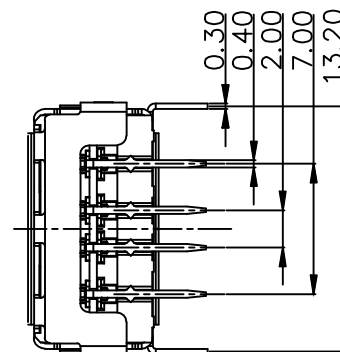

PCB LAYOUT T=2.1mm(max)
TOP VIEW TOLERANCE: ±0.1mm

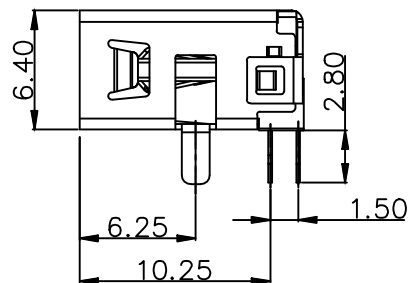

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) USB 2.0 A TYPE 雙向插 母座版端 DIP型 無捲邊	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)	
mm	7USB2-F0-0033	7USB2-F0-0033	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	尺 寸 SCALE 1:1 張 數 SHEET 1 / 1 更 改 REV A

