

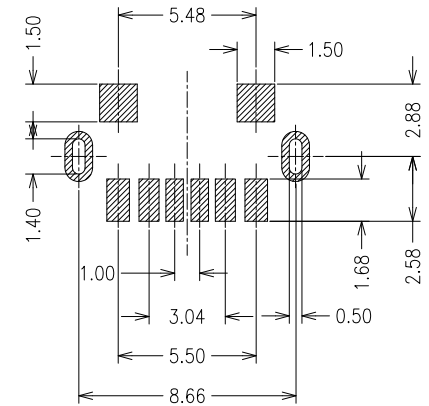




更改 REV	修改 MODIFICATION
A	ECXXXXX



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

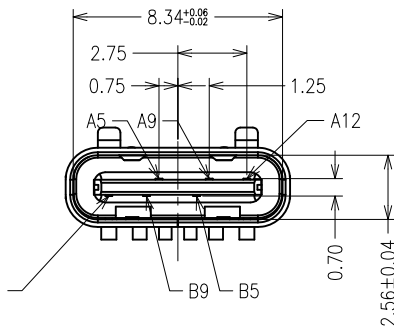


SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&3A
- 1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.
- 1-3. INSULATION RESISTANCE:
1000MΩ MIN FOR VOLTAGE 100VDC.
- 1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MINUTE
- 1-5. OPERATING TEMPERATURE: -25°C~+85°C

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERT FORCE: 5~20N Max
- 2-2. WITHDRAW FORCE: 5~20N Min
- 2-3. LIFE TEST :3,000 CYCLES



0.10Max.



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) TYPE C 6pin 180° SMT H:6.5mm	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT) mm	料 號(PART NO.) 7USB31-F0-0002	圖 號(DWG NO.) 7USB31-F0-0002	比例 1:1
審 核(CHECKED)	製 圖(DRAWN)	圖 號(SHEET) 1 / 1	圖 改 REV A