





更改 REV	修改内容 MODIFICATION	日期 DATE
A	ECXXXXX	



WITHOUT COVER







WITH COVER

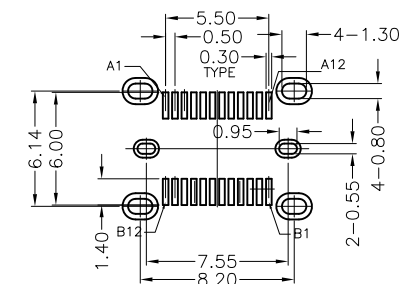

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

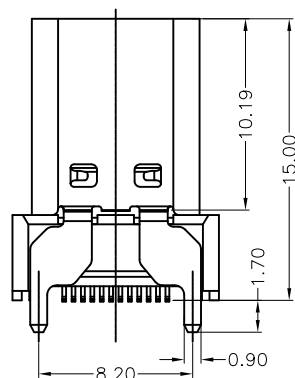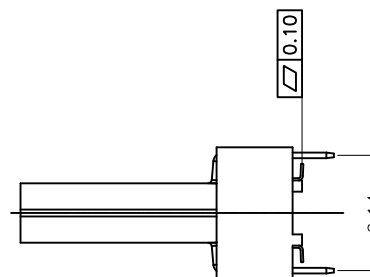

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N(0~1000cycle);
6~20N(1001~10000cycle);
- 5.Durability:10000 Cycles;
- 6.Plating: "Ni30u", "Au1u"



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X ± 0.50	X. $^{\circ}\pm 5^{\circ}$		
.X ± 0.30	.X. $^{\circ}\pm 2^{\circ}$		
.XX ± 0.20	.XX. $^{\circ}\pm 1^{\circ}$		
单位(UNIT)	料号(PART NO.)	名 称(TITLE) USB 3.1 TYPE C FEMALE VERTICAL H15.0MM SMT TYPE	
mm	7USB31-F0-0030	图 号(DWG NO.)	7USB31-F0-0030-A
审核(APROVAL)	核 对(CHECKED)	比例(SCALE)	1:1
		图 号(SHEET)	1 / 1
		图 号(REV)	A