


更改 REV	设计 MODIFICATION
A	ECXXXXX

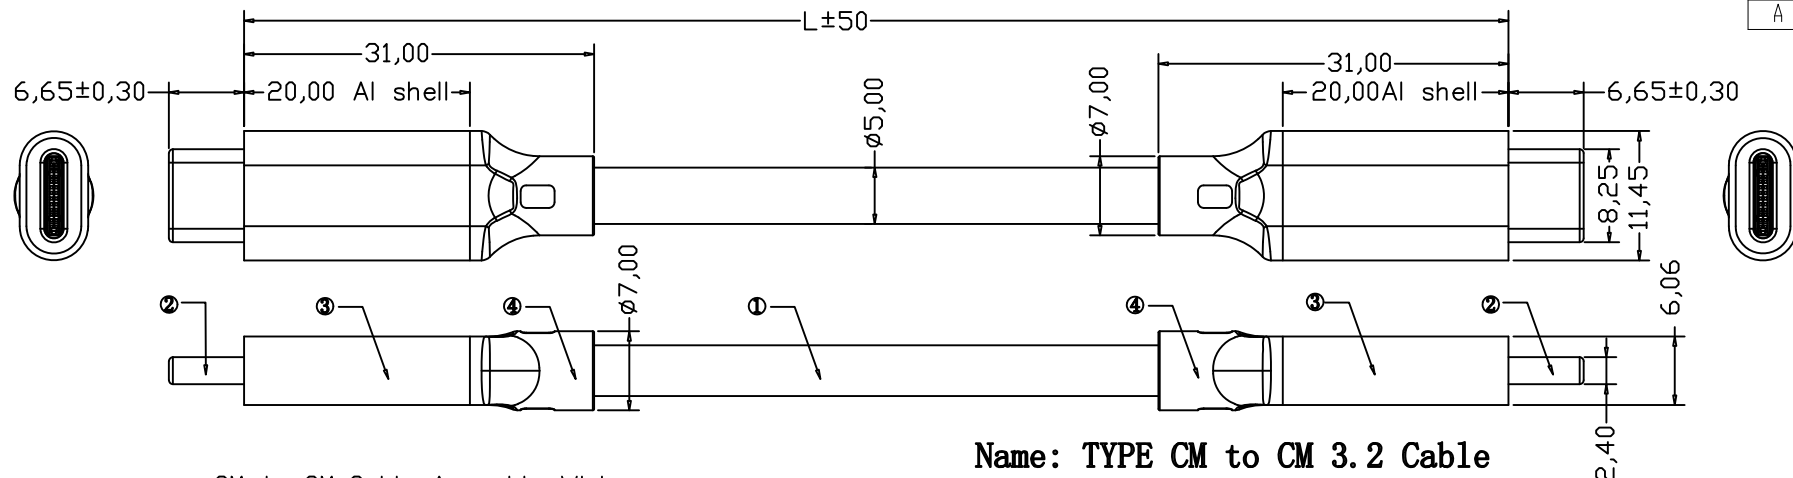

CM to CM Cable Assembly Wiring
UL 2725(1P*32#+AM)*4+1P*32#+4C*32#+2C*22#+ADB DD5.0

Type C Plug 1#		Type C Plug 2#
A1 A12 B1 B12	黑 GND	A1 A12 B1 B12
	C:10nF	
A4 A9 B4 B9	红 VBUS	A4 A9 B4 B9
A2 TX1+	蓝	B11 RX1+
A3 TX1-	黑	B10 RX1-
A5 CC	紫	A5 CC
A6 D+	绿	A6 D+
A7 D-	白	A7 D-
A10 RX2-	棕	B3 TX2-
A11 RX2+	橙	B2 TX2+
B2 TX2+	红	A11 RX2+
B3 TX2-	白	A10 RX2-
A8 SBU1	蓝	B8 SBU2
B8 SBU2	棕	A8 SBU1
B5 Vconn	黄	B5 Vconn
B10 RX1-	绿	A3 TX1-
B11 RX1+	黄	A2 TX1+
Shell		Shell

Name: TYPE CM to CM 3.2 Cable

Current: 5A Max

Voltage: 20V Max

Power: 100W Max

Data rate: 20GBbps

Durability: 5000 times

Operating temperature: - 40 ° C to 85 ° C

E-Marker:HUSB332A

PVC45P Color Black	2	Inner molding	4
Al shell 20MM	2	shell	3
Type-C Plug 24PIN+PCBA +eMark (HUSB332A 1pcs)	1+1	Connector	2
UL 2725(1P*32#+AM)*4+1P*32#+ 4C*32#+2C*22#+ADB DD5.0	1	Cable	1
Spec Description	Quantity	Part Name	NO.

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 称(TITLE) Type-CM to CM with E-marker Cable	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 位(UNIT) mm	料 号(PART NO) 7USB331L-F0-0005-XXX	图 号(DWG NO) 7USB331L-F0-0005-XXX	
审 核(CHECKED)	制 图(DRAWING)	比例 SCALE 1:1	张 数 SHEET 1/1
		更 改 REV A	

