



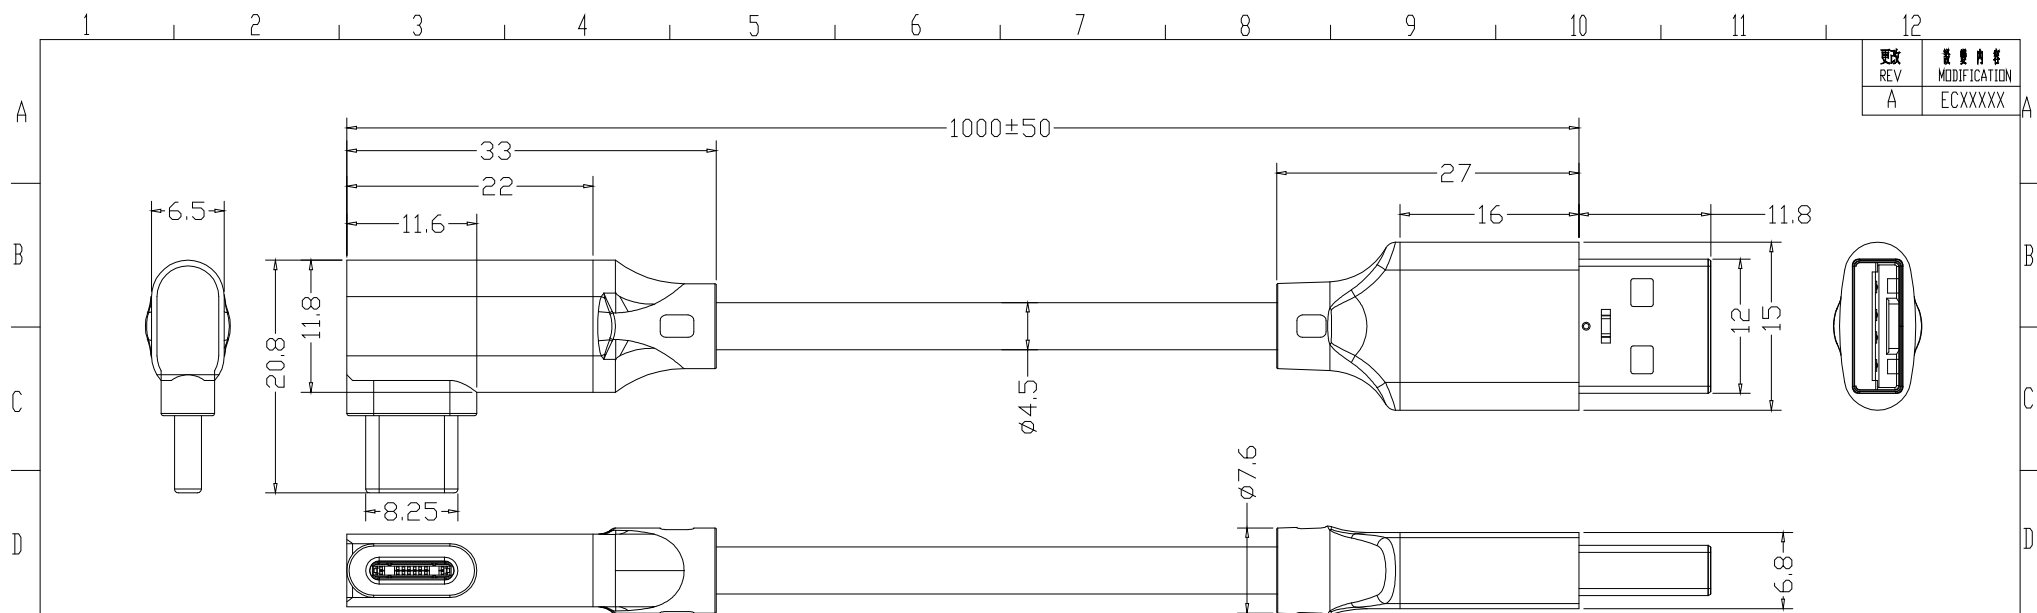

更改 REV	變更內容 MODIFICATION
A	ECXXXX

USB 3.0 CM to AM Cable Assembly Wiring

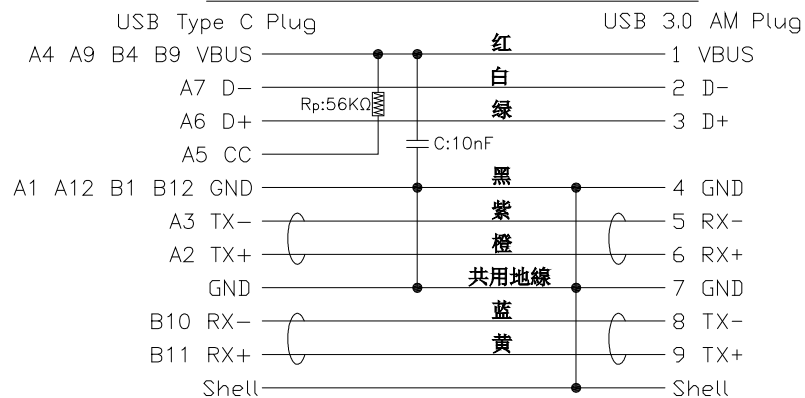

測試要求:

尺寸: 100%公差之內

電氣: 100%導通、短斷路、開路測試

耐壓: 200V AC 0.5mA

絕緣: 200V 10MΩ Min.

導通阻抗: 3Ω

外觀: 表面無髒污、砂孔、毛邊、缺膠、劃痕、壓痕等直觀可視的不良為合格。

Name: TYPE CM to USB AM3.0 Cable

Current: 3A Max

Voltage: 20V Max

Power: 60W Max

Data rate: 6G-10Gbps

Durability: 5000 times

Operating temperature: - 40 ° C to 85 ° C

CableAWG:USB3.0[1P*32#+D+AL*2+1P*32#+1C*32#+1C*22#+AL+B OD:4.2MM

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X _L ± 0.50	X _L *± 5 °	名稱(TITLE)	TYPE CM TO USB3.0AM CABLE 1米
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT)	料號(PART NO.)	圖號(DWG NO.)	
mm	7USB331L-F0-0006	7USB331L-F0-0006	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例(SCALE)
			1:1
		張數(SHEET)	1/1
		更改(REV)	A

