








更改 REV	變更內容 MODIFICATION
A	EC07182
B	EC12707

- NOTE :
- 1.Rated Current:DC5V 0.3A.
 - 2.Insulation Resistance:≥100MΩ 100V DC/1min.
 - 3.Compressive strength:AC250V 50Hz/1min.
 - 4.Temperature Range:-40℃ ~ 85℃.
 - 5.Mechanical Life:10,000 cycles .
 - 6.Contact resistance:≤ 100MΩ MAX.
 - 7.Operation Stroke:1.5±0.2mm.

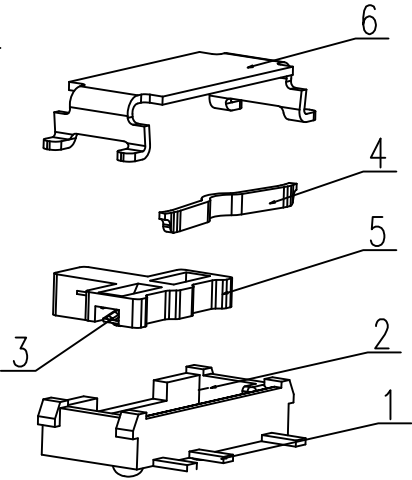


1	TERMINAL	COPPER ALLOY	1	AG PLATED
2	CASE	PPA	1	UL-94HB
3	CONTACT	COPPER ALLOY	1	AG PLATED
4	SHRAPNAL	STAINLESS STEEL	1	-
5	STEM	PPA	1	UL-94HB
6	COVER	COPPER ALLOY	1	AG PLATED
NO.	NAME	MATERIAL	QUANTITY	REMARKS

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司		
X± 0.50	X*± 5 °	名 稱(TITLE) 撥動開關		
.X± 0.30	.X*± 2 °			
.XX± 0.20	.XX*± 1 °			
單 位(UNIT)	料 號(PART NO.)	圖 號(DWG NO.)		
mm	7WHT-F0-0063	7WHT-F0-0063		
審 核(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1	張 數 SHEET 1/1	備 註 REV B

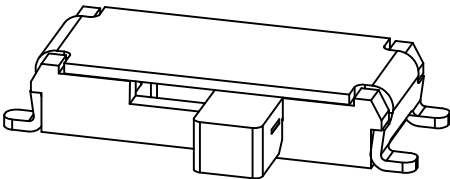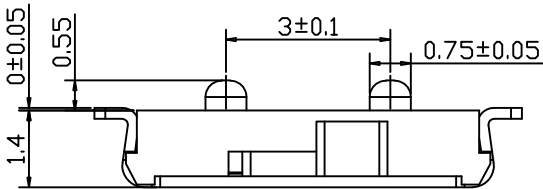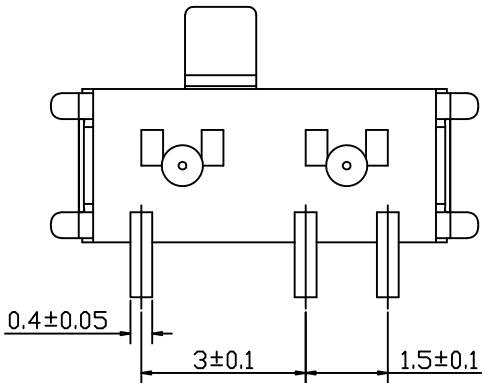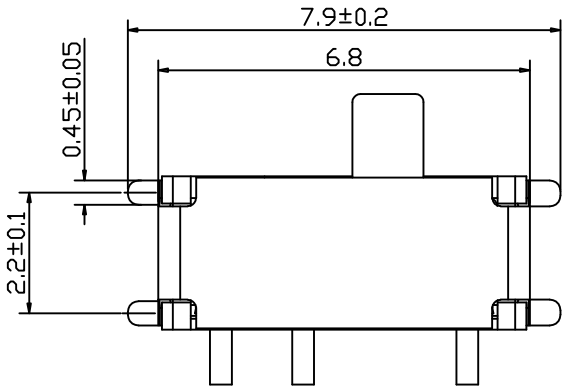

CIRCUIT DIAGRAM

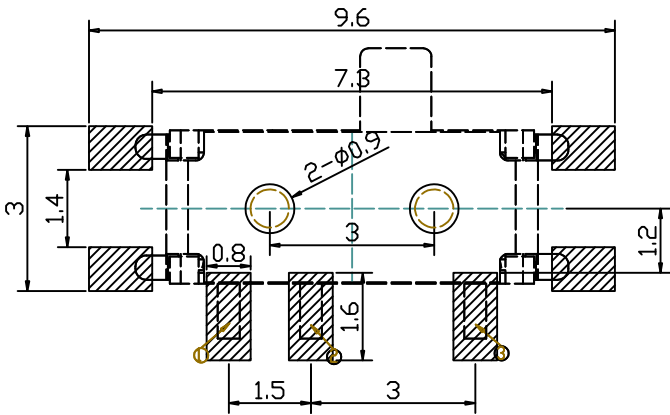

P. C. B MOUNTING PATTERN DIMENSION