




PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

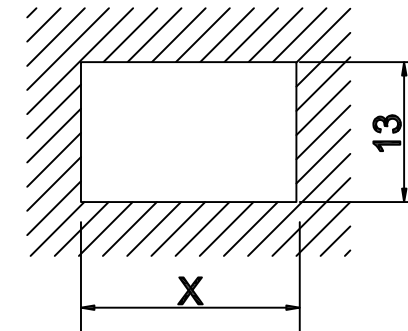

SPECIFICATION

- RATING: UL C-UL:16A 125VAC
ENEC SEMKO:
10(4)A 250VAC T125/55 1E4
10(2)A 250VAC T85/55 5E4
- CIRCUIT:ON-OFF SPST 2P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:50000 Cycles at Full Load
- OPERATION FORCE:300~800gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

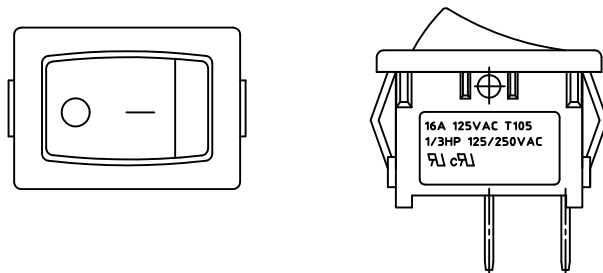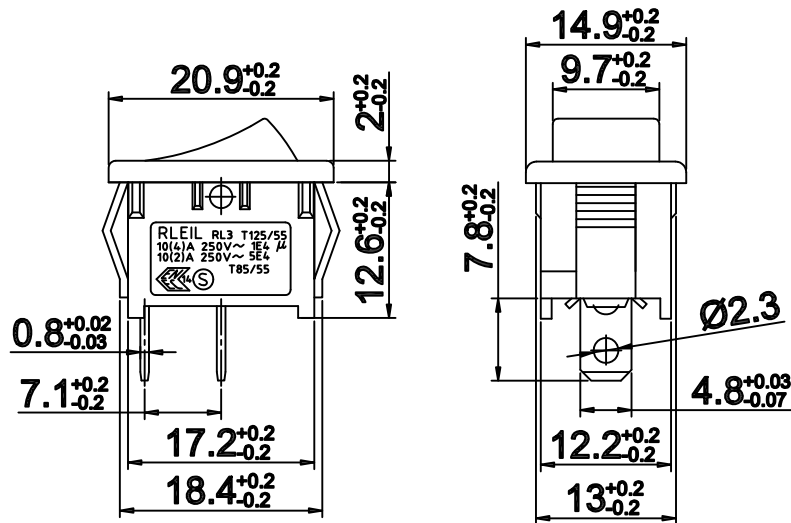

MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:Nylon #66 UL 94V-2
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO₂In₂O₃ (10)/Cu



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司 名 称(TITLE) ROCKER SWITCH	
X± 0.50	X*± 5 °		
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 位(UNIT)	料 号(PART NO.)	图 号(DWG NO.)	
mm	7WHE-F0-3038	7WHE-F0-3038-A	
审 核(APPROVAL)	核 对(CHECKED)	制 图(DRAWN)	比例 SCALE 1:1 张 数 SHEET 1/1 更 改 REV A