
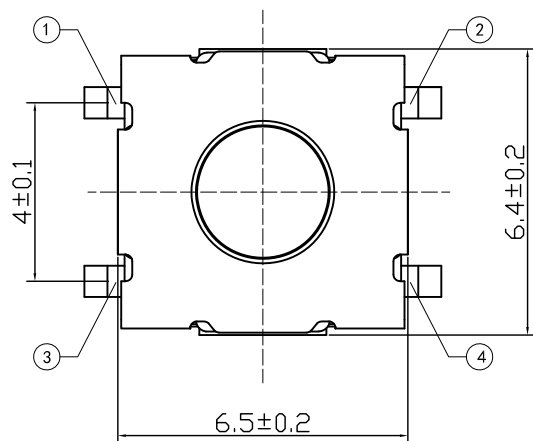
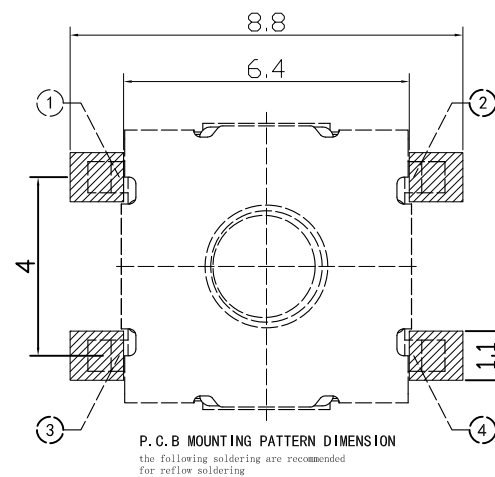



CIRCUIT DIAGRAM

项 目	规 格
額定電負荷:	DC12V 50mA
絶縁電阻:	≥100MΩ 100V DC/1min
耐壓強度:	AC250V 50Hz/1min
環境溫度:	-40℃ ~ +85℃
接觸電阻:	≤100mΩ Max
行 程:	0.3±0.1mm
按壓壽命:	1,000,000
按壓力:	150g±50

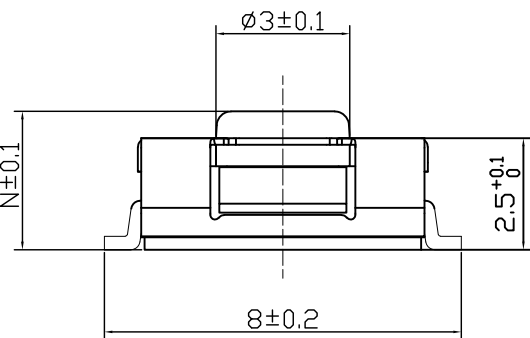

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) 6.2X6.2XN(4.3) TACT SWITCH	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 位(UNIT) mm	料 號(PART NO) 7WTE-F0-3066-4.3	圖 號(DWG NO) 7WTE-F0-3066-4.3	
審 核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比 例 SCALE 1:1 圖 號 PROJ.
			張 數 SHEET 1/1 更 改 REV A