



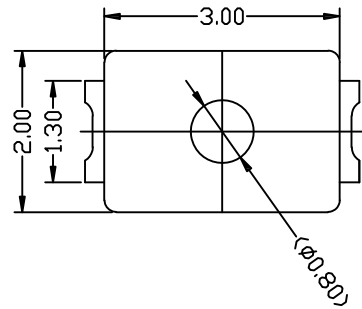



更改 REV	變更內容 MODIFICATION
A	ECXXXXX




- 1.RATING: DC 12V,50mA Max
- 2.OPERATING FORCE: 200±40gf
- 3.TRAVEL: 0.15±0.05mm
4. LIFE: 100,000cycles
5. PACKAGE: 10000Pcs/Reel

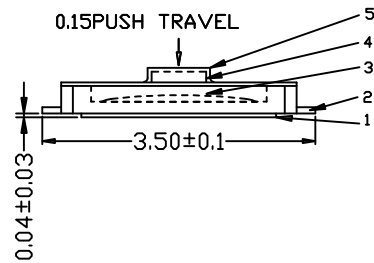

TEASCALE:2.5/1

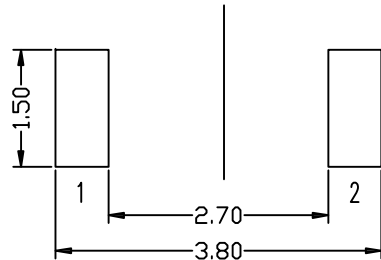

Recommended PAD Layout $\Phi \pm 0.05$
Recommended solder thickness: T=0.10±0.01



CIRCUIT DIAGRAM

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
6				
5	COVER	1	PI	YELLOW
4	KNOB	1	PI	BLACK
3	CONTACT	2	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	CASE	1	LCP	BLACK

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
		THIN FILM SWITCH	
單位(UNIT)	料號(PART NO.)	圖號(DWG NO.)	
mm	7WHTF-F0-3079	7WHTF-F0-3079	
審核(APPROVAL)	核對(CHECKED)	製圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1 更改 REV A

