
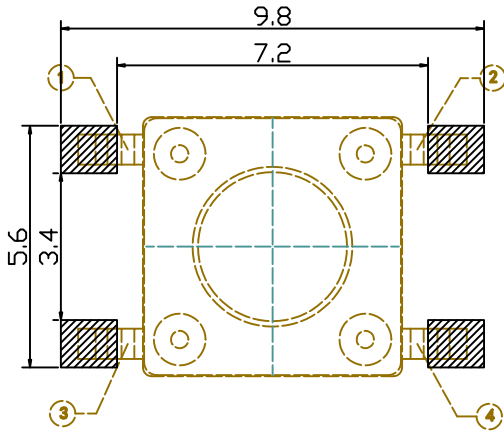
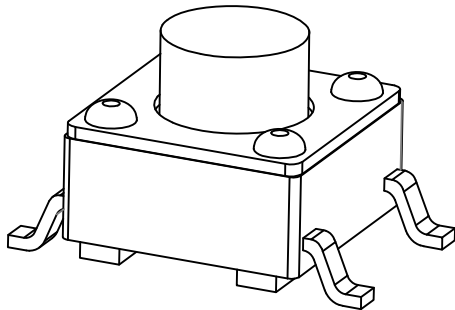
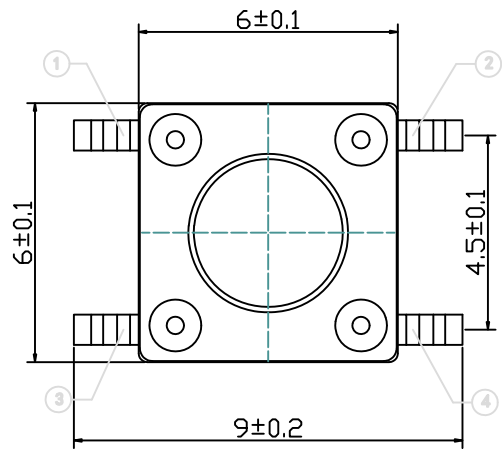

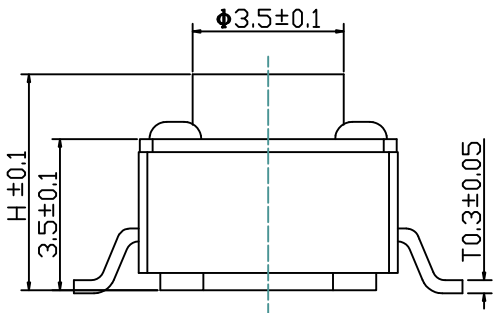


更改 REV	数量 MODIFICATION
A	ECXXXX

项 目	规 格
额定电负荷:	DC12V 50mA
绝缘电阻:	≥100MΩ 100V DC/1min
耐压强度:	AC250V 50Hz/1min
环境温度:	-40℃ ~ +85℃
接触电阻:	≤100mΩ Max
行 程:	0.25±0.1mm



P.C.B MOUNTING PATTERN DIMENSION
the following soldering are recommended
for reflow soldering

7WHITE-F0-3081-X

EX:(4.3/5.0/.../23.0)

H:	4.3	5.0	5.5	6.0	6.5	7.0	7.3	8.0	8.5
	9.0	10.0	10.5	11	12.5	13.0	13.5	18.0	23.0

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °		
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °	名 称(TITLE)	
		TACT SWITCH	
单 位(UNIT)	料 号(PART NO.)	图 号(DWG NO.)	
mm	7WHITE-F0-3081-X	7WHITE-F0-3081-X	
审 核(APPROVAL)	核 对(CHECKED)	制 图(DRAWN)	
		SCALE 1:1	张 数 SHEET 1/1
		PROJ.	更 改 REV A

