

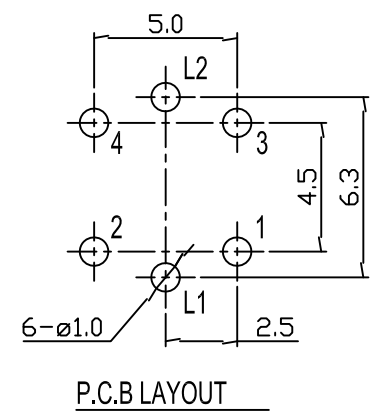



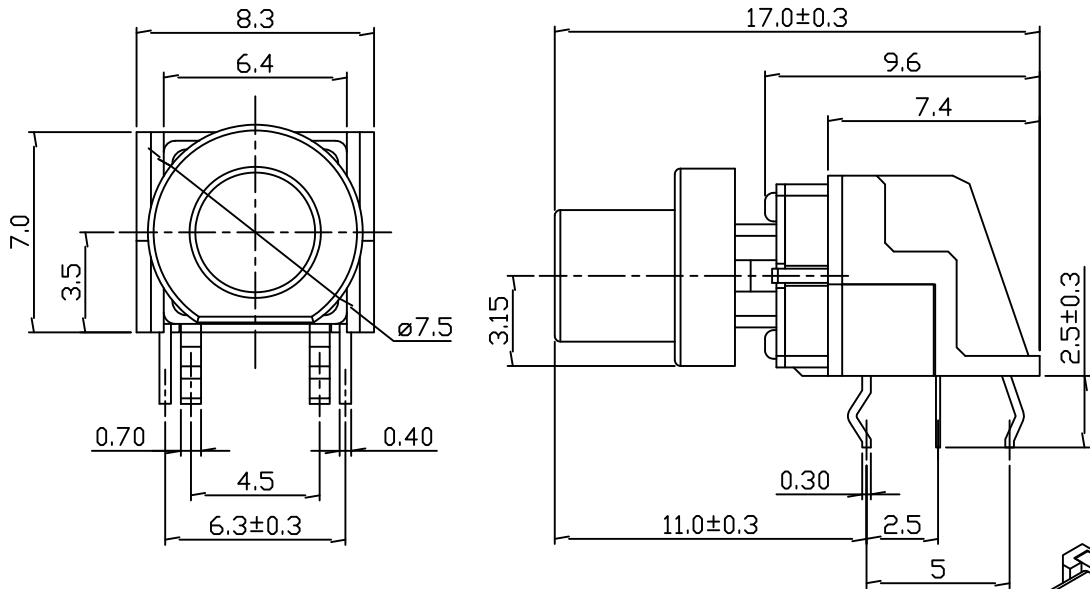

NO.	PART NAME	MATERIAL
1	CAP	PC L-1225Y or L-1250Y, 黑色
2	COVER	PA66+15%GF, UL94V-0, 黑色
3	端子脚固定下座	PA6T+30%GF UL94V-0, 黑色
4	PLUNGER	PA46+30%GF, UL94V-0, 黑色
5	LED	GaN/GaN
6	BASE	PA6T 黑色, Terminal C2680 Ag plating
7	METAL DOME	C5210R / Ag plating
8	端子脚固定下座	PA6T+30%GF UL94V-0, 黑色

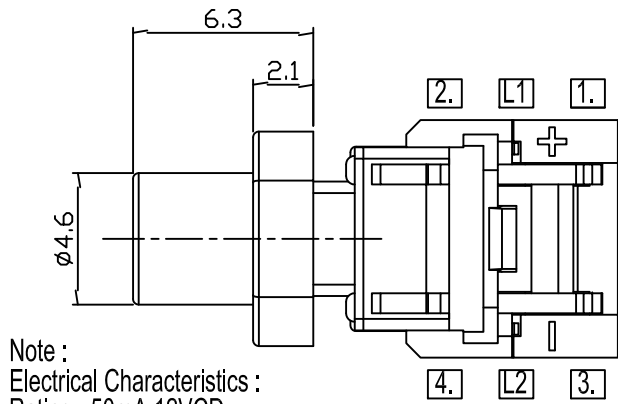

Note :

Electrical Characteristics :

Rating : 50mA 12VCD

Contact Resistance : 100m Ω max. (Initial)

Insulation Resistance : 100M Ω min. (at 250 VDC)

Dielectric Strength : AC 250V (50/60Hz for 1 minute).

Terminal plating : Ag 0.5 μm.



Mechanical Characteristics:

Operating Force : 160±0gf

Travel : 0.25±.1mm

Operating Life : 100,000 cycles min.

Operating temperature : -20°C to 70°C.

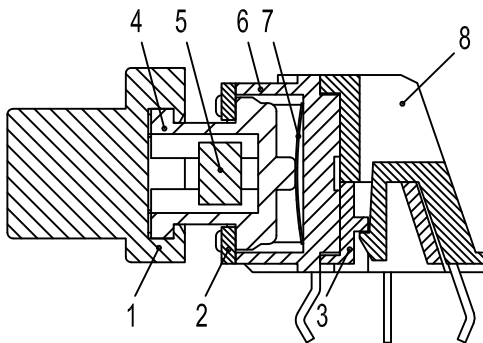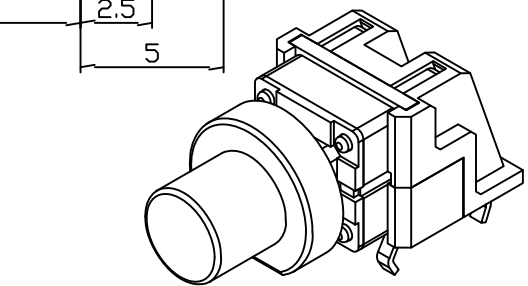

7WHITE-F0-3X36-A

0:Button for

1:Button for



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 称(TITLE)	
X± 0.30	X*± 2 °	Tact SWITCH	
.XX± 0.20	.XX*± 1 °		
单 位(UNIT)	料 号(PART NO.)	图 号(DWG NO.)	
mm	7WHITE-F0-3X36	7WHITE-F0-3X36-A	
审 核(APPROVAL)	核 对(CHECKED)	製 图(DRAWN)	张 数 SHEET 1 / 1
		SCALE 1:1	更 改 REV A