



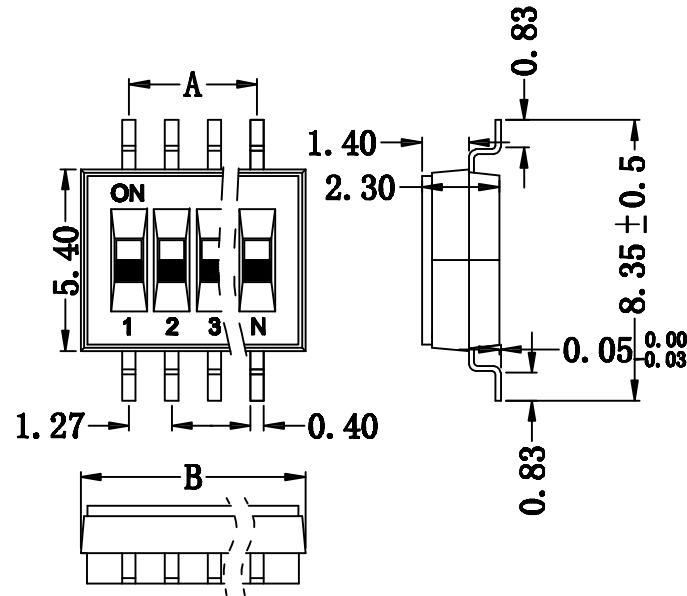

Schematic





Notes:

Specations:

- 1). Operating force:1000gf Max
- 2). operating temperature:-30° to+85°
- 3). storage temperature:-40° to+85°
- 4). Mechanical life:3000cycles minimum

Constuction

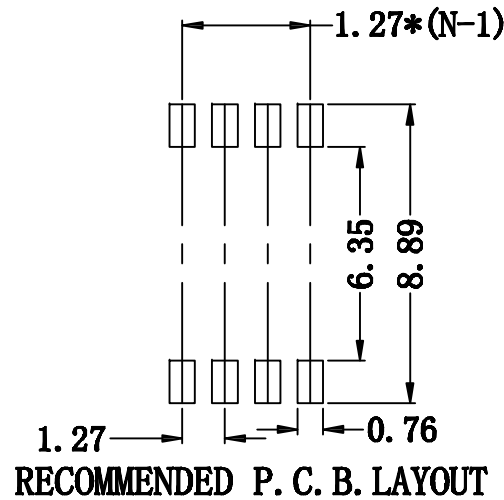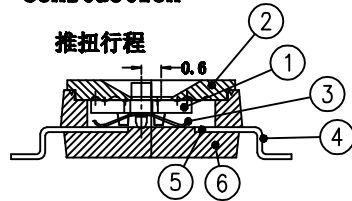

DIMENTIONS			DIMENTIONS		
POS.	A	B	POS.	A	B
			2P	1.27	4.14
3P	2.54	5.41	4P	3.81	6.68
5P	5.08	7.95	6P	6.35	9.22
			8P	8.89	11.76
			10P	11.43	14.30

Number	Part Name	Material
①	Actuator	UL94 V0
②	Cover	UL94 V0
③	Movable	Copper Alloy
④	Terminal	Brass
⑤	Base	UL94 V0
⑥	Terminal contact	Brass



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) 指撥開關SMT	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT) mm	料 號(PART NO) 7WHE-F0-S028	圖 號(DWG NO) 7WHE-F0-S028	
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	比例 SCALE 1:1 張數 SHEET 1/1 修改 REV A