

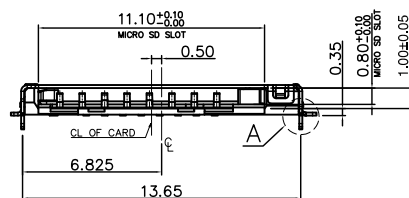
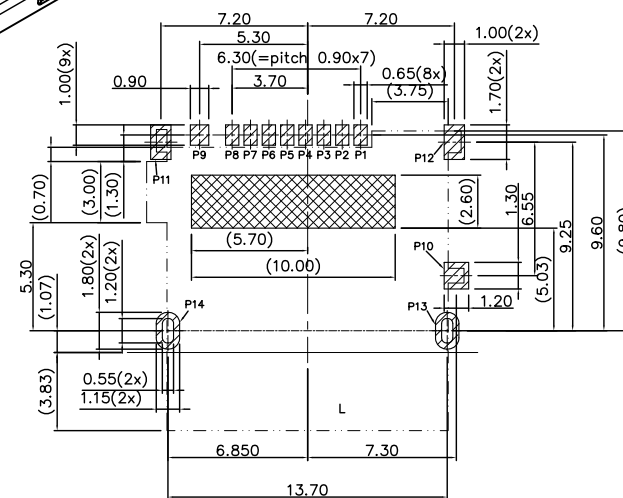
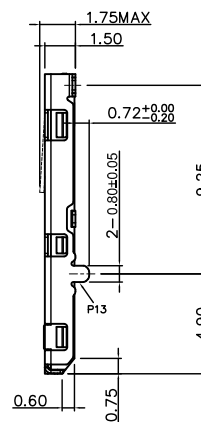
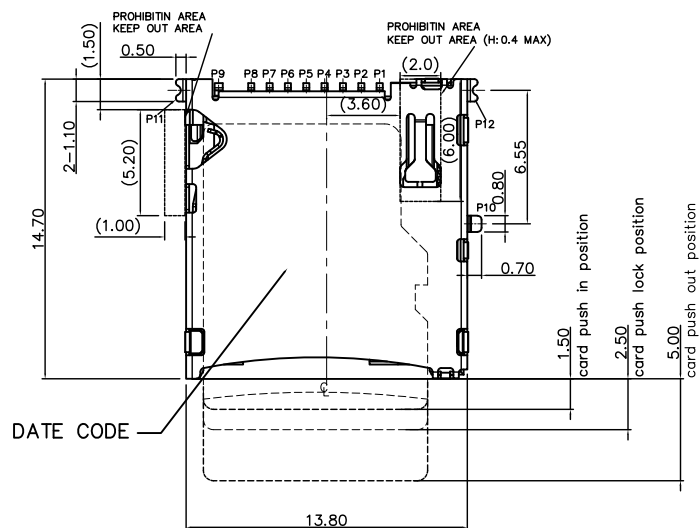
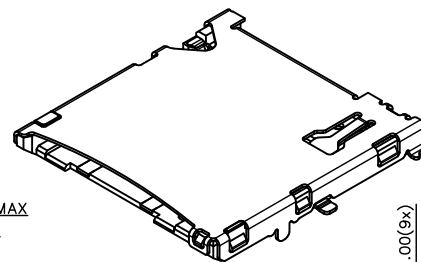


更改 REV	變更內容 MODIFICATION
A	ECXXXXX

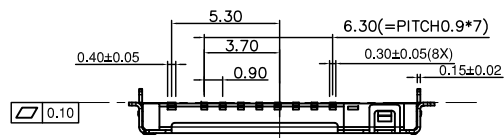

DETAIL A
SCALE 5:1

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE: ± 0.05

-  PAD AREA
 NO COPPER AREA
 KEEP OUT AREA

NOTES:

1. MATERIAL:
- 1.1 PLASTIC: LCP , UL 94V-0, COLOR: BLACK.
 - 1.2 CONTACT: COPPER ALLOY.
 - 1.3 SHELL: STAINLESS STEEL.
2. FINISH:
- 2.1 TERMINAL: 50u" MIN. NICKEL PLATED OVERALL.
 - 2.2 CONTACT: Au 1u".
 - 2.3 TAIL: 100u" MATT-TIN PLATED.
 - 2.4 SHELL: 50u" MIN. NICKEL PLATED OVERALL.

PIN NUMBER	PIN DEFINE
PIN 1	MICRO SD_DAT2
PIN 2	MICRO SD_CD/DAT3
PIN 3	MICRO SD_CMD
PIN 4	MICRO SD_VDD
PIN 5	MICRO SD_CLK
PIN 6	MICRO SD_VSS
PIN 7	MICRO SD_DAT0
PIN 8	MICRO SD_DAT1
PIN 9	MICRO SD_CD
PIN 10	GND
PIN 11,12,13,14	GND

CARD DETECT SWITCH OPEN/CLOSE FOR MICRO SD CARD POSITION	
UN-INSERTION	CARD DETECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INSERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN CLOSE



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司 名 (TITLE) MICRO SD PUSH	
X.± 0.50	X.° ± 5°		
.X± 0.30	.X° ± 2°		
.XX± 0.20	.XX° ± 1°		
單 (UNIT) mm	料 (PART NO) 7MSDP-F0-0039	圖 (DWG NO) 7MSDP-F0-0039	
審 (APPROVAL)	核 (CHECKED)	製 (DRAWN)	比例 SCALE 1:1 圖號 SHEET 1/1 更改 REV A