




THIS SHEET ONLY FOR KEY B TYPE

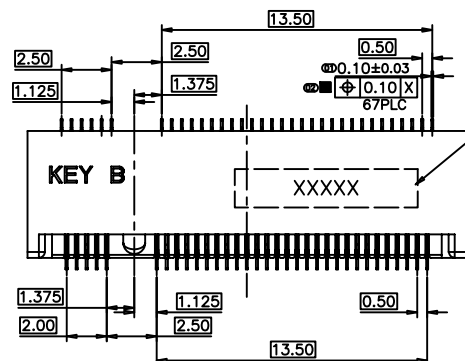



LOGO&DATE CODE
SEE NOTES 5




SECTION A-A
SCALE:1:1



SECTION B-B
SCALE:1:1

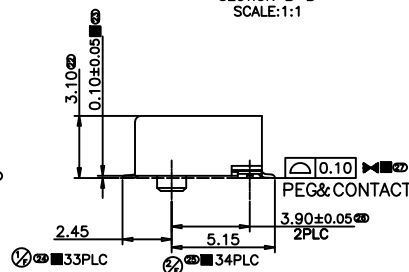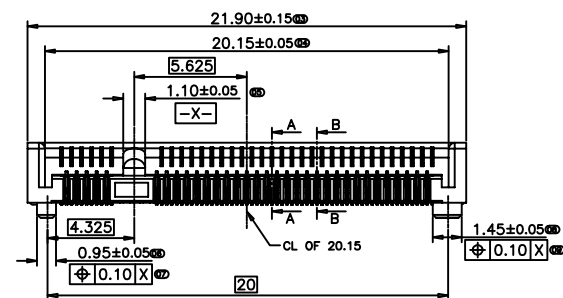

SECTION C-C
SCALE:1:1

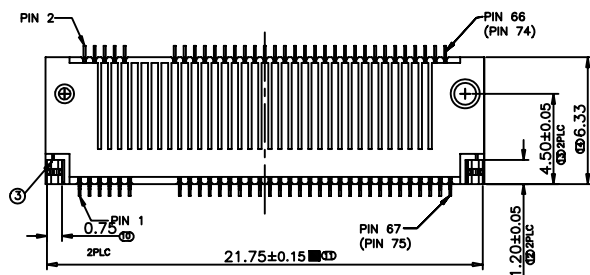

3	PEG	STAINLESS STEEL		Ni Plated
2	CONTACT	COPPER ALLOY		Gold/Tin Plated
1	HOUSING	LCP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

NOTES:


PRODUCT MUST MEET CONTROLLED SUBSTANCES SPEC,ROHS 2.0 AND HALOGEN FREE.

1. MATERIAL:

- 1.1 HOUSING:MG350,BLACK,UL94V-0
- 1.2 CONTACTS:PHOSPHOR BRONZE C5210-EH,t=0.10±0.01
- 1.3 PEG:SUS 304,t=0.15±0.01

2. FINISH:





- 2.1 CONTACT: GOLD PLATING (g/f,1~30u") ON CONTACT AREA AND GOLD FLASH ON SOLDER TAIL,50u"MIN NICKEL UNDERPLATING OVERALL
- 2.2 PEG: 50u"MIN NICKEL UNDERPLATING OVERALL,100u"MIN MATTE TIN ON SURFACE
3. RETENTIVITY FORCE IS 0.1Kg MIN FOR TERMINAL AND PEG,RELIABILITY TEST ACCORDING TO PRODUCT SPEC:DR-PS-0024
- 4.MARK ⊕ IS CPK ITEMS,(27 PLACE),MARK ■ IS QIP ITEMS(09 PLACE), MARK ⊞ IS FAI ITEMS,(01 PLACE)



GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 称(TITLE) NGFF 67PIN B KEY H:3.2mm	
X± 0.30	X*± 2 °		
.XX± 0.20	.XX*± 1 °		
单 位(UNIT)	料 号(PART NO.)	图 号(DWG NO.)	
mm	7NGFF-F0-0305	7NGFF-F0-0305	
审 核(CHECKED)	制 图(DRAWN)	比 例(SCALE)	张 数(SHEET)
		1:1	1/2
		图 例	更 改(REV)
			A

PLUG PCB

更改 REV	数量 MODIFICATION
A	ECXXXXX

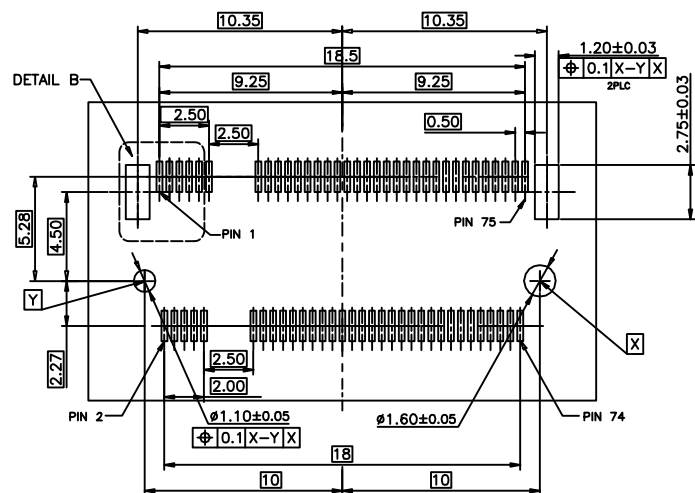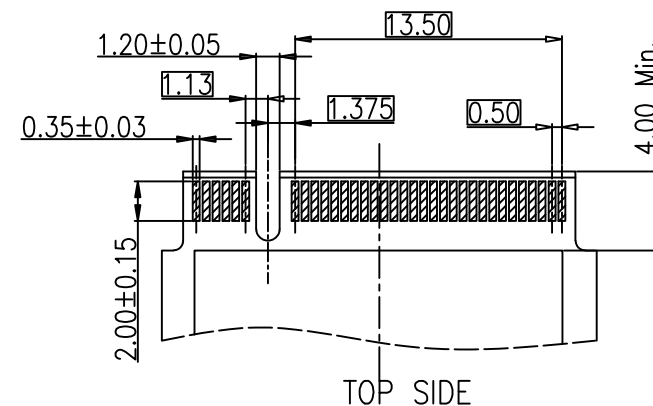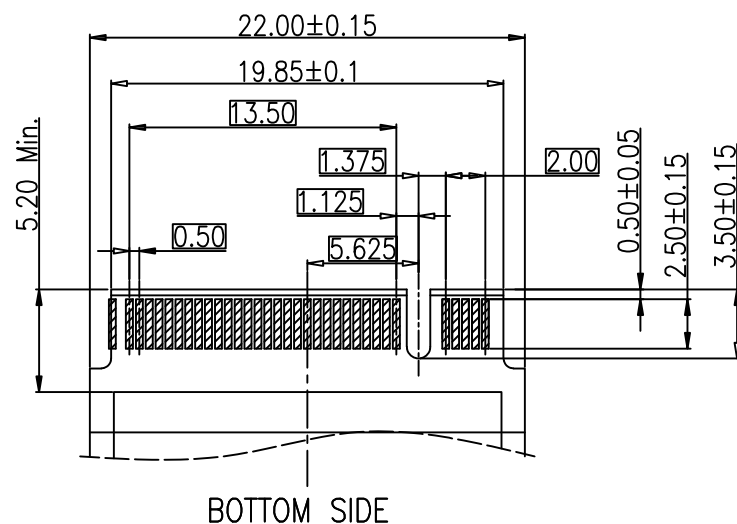

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE : ±0.05mm

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 (TITLE) NGFF 67PIN B KEY H:3.2mm	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單 (UNIT) mm	料 (PART NO.) 7NGFF-F0-0305	圖 (DWG NO.) 7NGFF-F0-0305	比例 (SCALE) 1:1
審 (APPROVAL)	核 (CHECKED)	製 (DRAWN)	張數 (SHEET) 2/2
			圖次 (REV) A

