

更改 REV	變更 MODIFICATION
A	ECXXXX

SPECIFICATION:

1.MATERIAL:

HOUSING: LCP 30% G/F UL 94V-0

COLOR:BLACK

CONTACT: PHOSPHOR BRONZE C5191R-H,T=0.25mm

PEG: BRASS C2680R-H,T=0.20mm

2.FINISH:








CONTACT:1u" GOLD/TIN PLATING ON CONTACT AREA

100u" MIN. TIN PLATING ON SOLDER TAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

PEG:100u" MIN. TIN PLATING ON SOLDER TAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

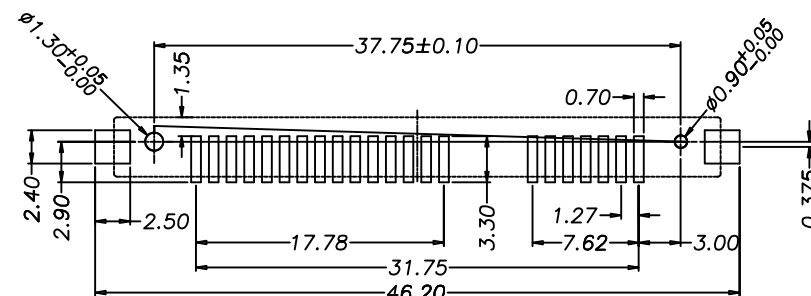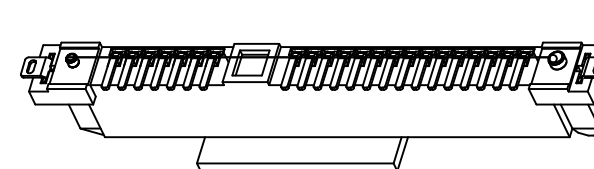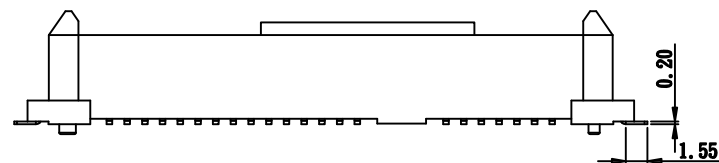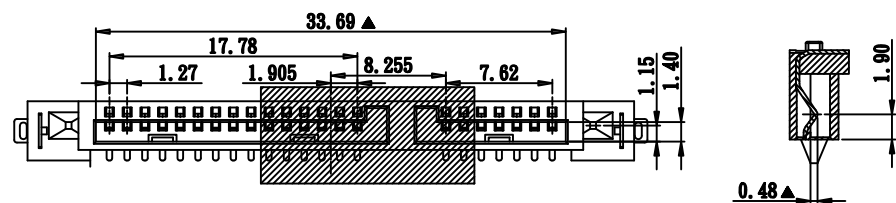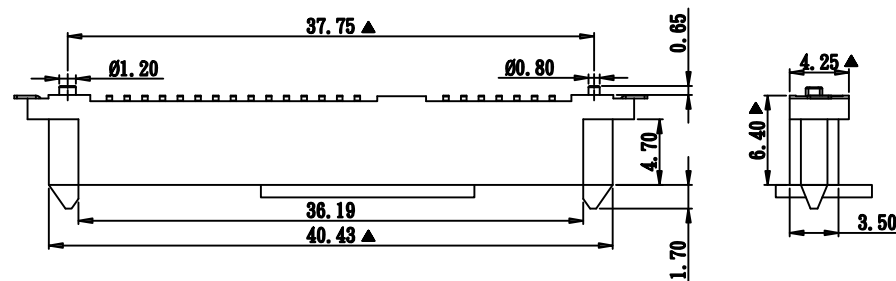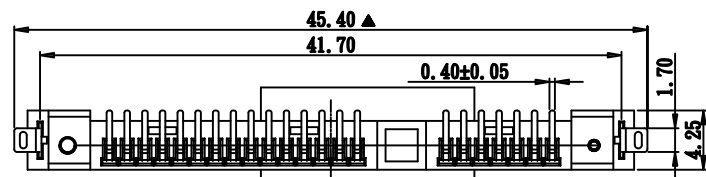

RECOMMENDED PCB LAYOUT
UNLESS TOLERANCE: +/ -0.05

GENERAL TOLERANCE		KINGCONN 皇海科技股份有限公司	
X± 0.50	X*± 5 °	名 稱(TITLE) SATA 7+15P 直立式 SMT 帶接片	
.X± 0.30	.X*± 2 °		
.XX± 0.20	.XX*± 1 °		
單位(UNIT) mm	料 號(PART NO.) 7SATA-F0-0015	圖 號(DWG NO.) 7SATA-F0-0015	比例 SCALE 1:1
審核(APPROVAL)	核 對(CHECKED)	製 圖(DRAWN)	圖 數 SHEET 1 / 1
			更改 REV A

